



**TEM**

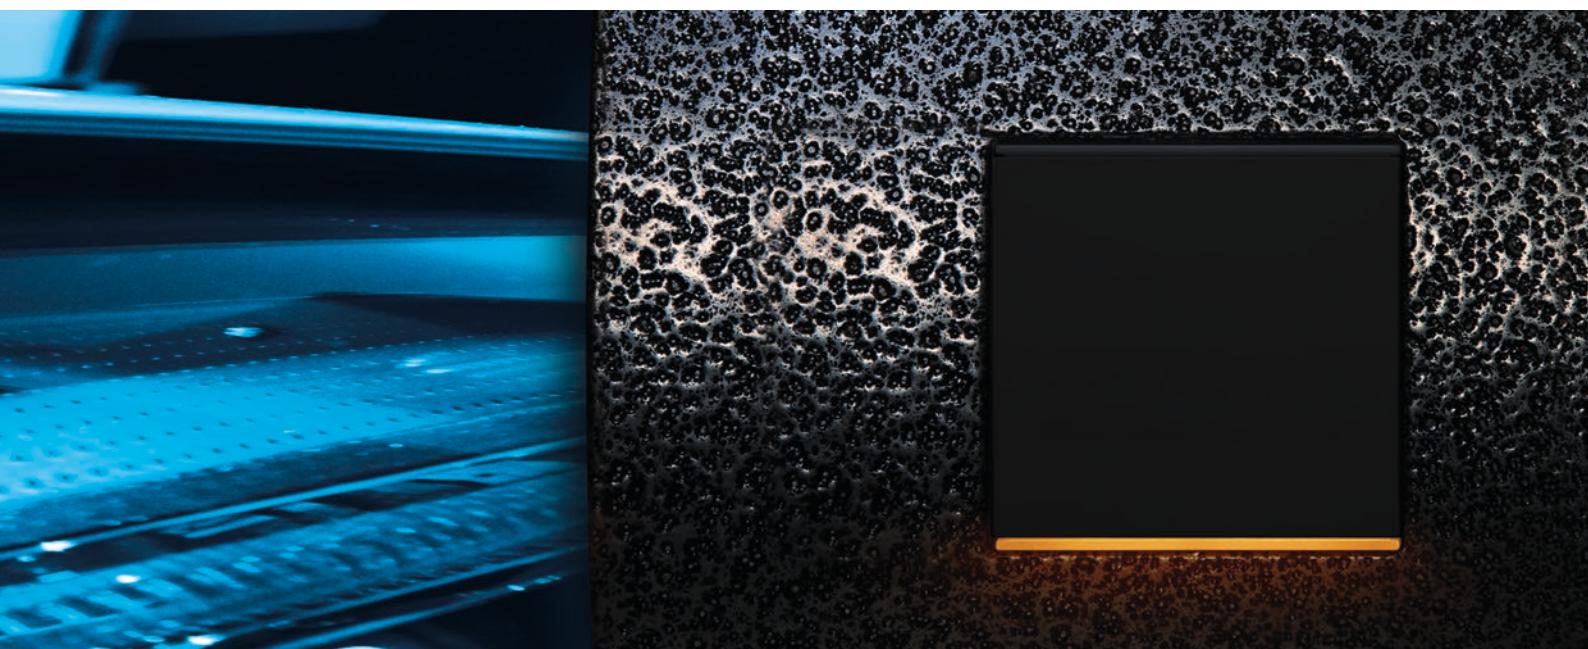

touching completeness

**TEM**

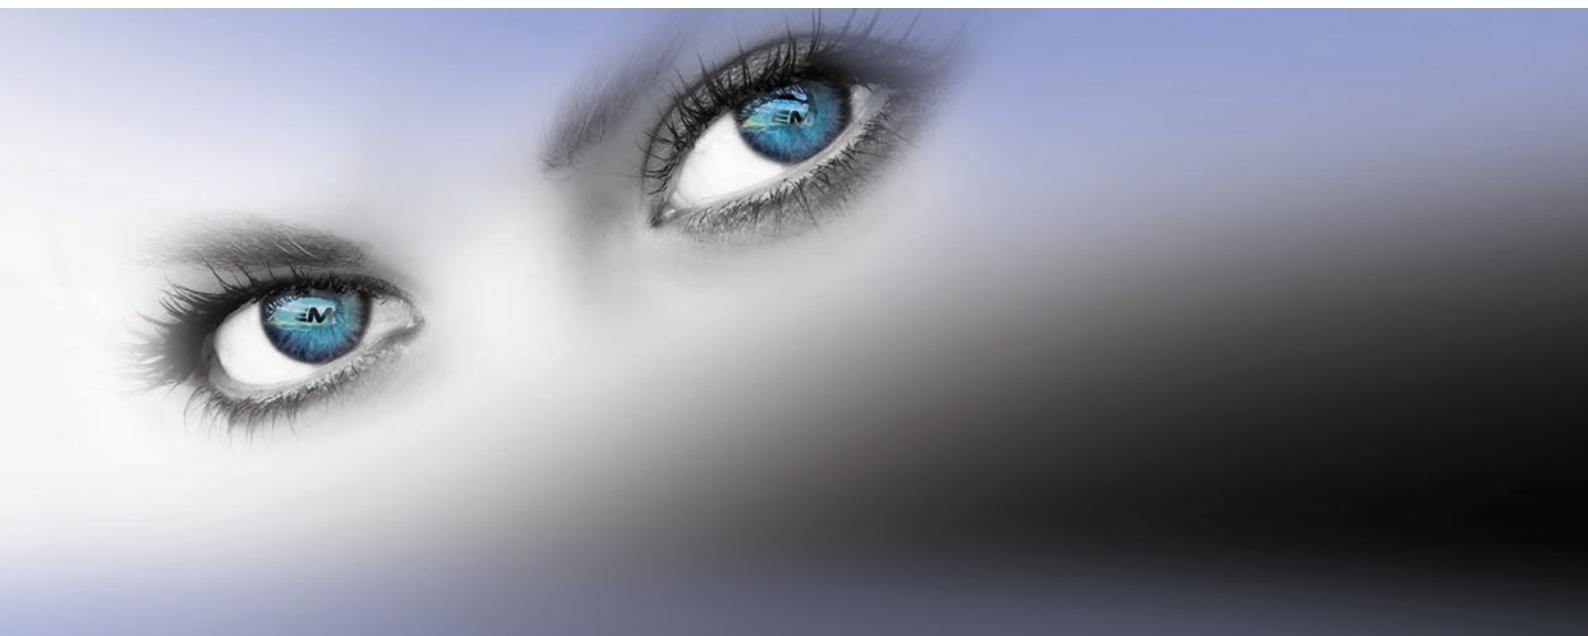

# Dobrodošli u obitelj MODUL

## Welcome to the MODUL family

Proširujemo i usavršavamo modernu obitelj Modul sklopki za sve vrste prostorija.

We are expanding and perfecting the modern  
Modul switch family for all types of rooms.

discovering new insights

otkrivanje novih saznanja

# MODUL


Dizajnerske linije Pure, Line i Soft odražavaju moderan, sofisticiran i neovisan životni stil. U širokoj paleti boja, uzoraka i oblika možete odabrati sklopke i utičnice koje će pristajati željenoj atmosferi i ugodaju.

The Pure, Line and Soft design lines reflect a modern, sophisticated and independent lifestyle. You can choose from a wide and rich selection of colours, patterns and shapes to alter the appearance of your switches and sockets so that they fit the desired atmosphere and mood.

PURE

prirodni materijali  
natural materials

drvo  
wood  
metal  
staklo  
metal  
glass



line



soft




ravne linije  
straight lines



meke linije  
soft lines



PURE

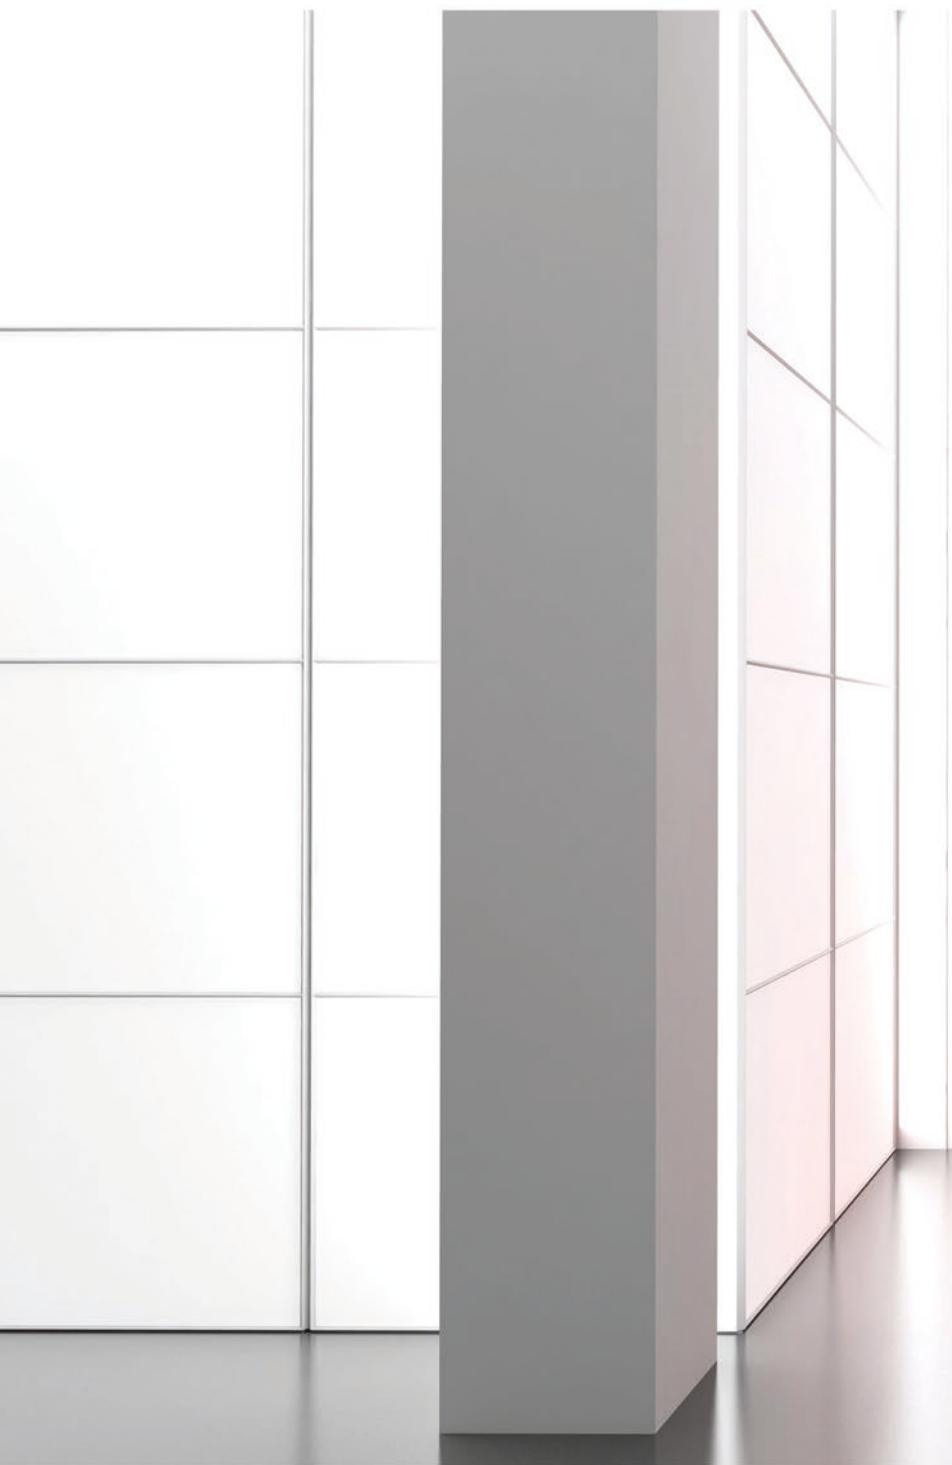

# predivan život wonderful living

Iz čistoće i neokaljanosti novonastalog svijeta dolazi priča linije Pure. Dodir prirodnih motiva prošaran je sofisticiranim ukusom za linije i oblik i isprepleten nitima najnovije tehnologije.

From the cleanliness and purity of a new-born world stems the story of the Pure line. The touch of natural motifs is intertwined with a sophisticated taste for lines and form and interwoven with threads of state-of-the-art technology.



PURE






## osjetiti prirodu feeling of nature

Linija Pure sklopki ističe se svojim prirodnim materijalima: metalom, drvom i staklom. Njezin jedinstveni dizajn ima posebnu draž. Upečatljiv, no ipak nemetljiv. Zrači senzualnošću, sofisticiranošću, visokim standardima te, naravno, čistoćom.

The Pure switch line is distinguished by its natural materials: metal, wood and glass. Its unique design gives it a special touch. It is striking yet unobtrusive. It radiates sensuality, sophistication, high standards and, of course, cleanliness.

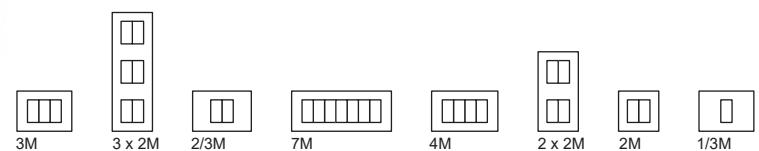

line











# harmonija ravnih linija harmony of straight lines

Pripremite se za elegantno savršenstvo ravnih oblika. Isprobajte sjajne površine koje se poigravaju s modernim elementima vaše sobe. Samo za vas smo uključili smo „Soft Touch”, pretvarajući svaki dodir u jedinstveno iskustvo.

Prepare for the elegant perfection of straight shapes. Try brilliant surfaces that gently play with modern elements of your room. We have incorporated “Soft Touch” technology especially for you, turning every touch into a unique experience.



~~line~~

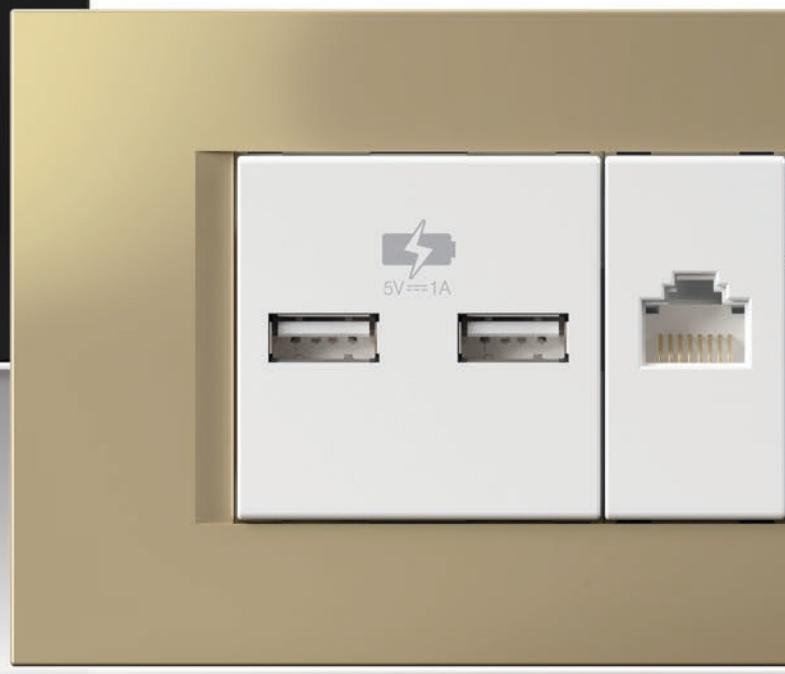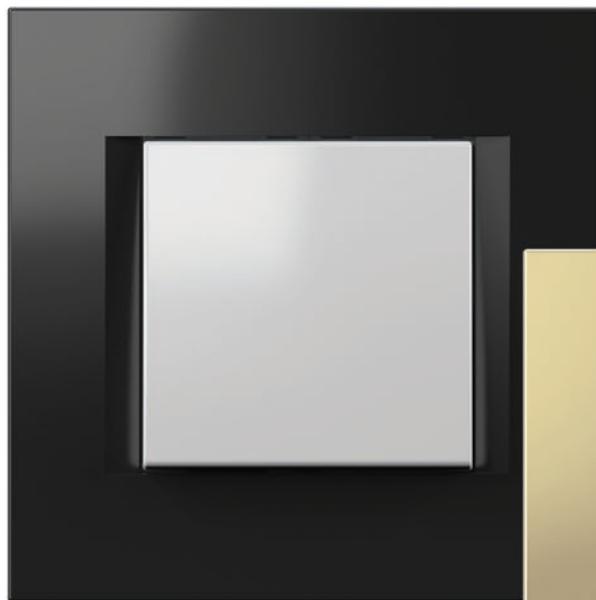




## moderan dizajn modern design

Čiste, ravne linije čine svevremenski dizajn. Savršeno ravan profil i ergonomija laganog dodira daju zapanjujuće elegantan izgled iz svih kutova.

Its straight, smooth lines make for a timeless design.

Its perfectly straight, sleek profile and soft-touch ergonomics give it an amazingly elegant appearance from all angles.

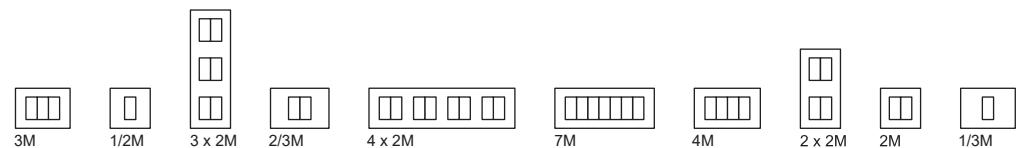

soft



# mekoća u vašem domu softness in your home


Neka okrugli oblici i meki prijelazi unesu mekoću u vaš dom.

Let the rounded shapes and soft transitions  
bring softness into your home.



soft




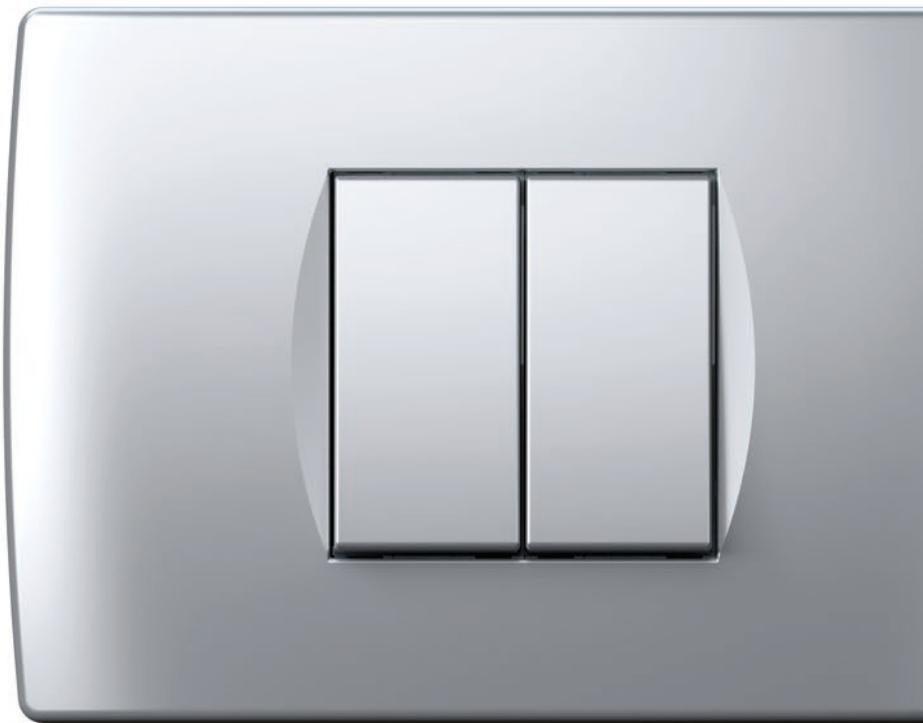

# toplina doma a warm home

Savršeno meke linije zaokružene suptilnim odabirom boja i posebnim premazima za poseban dodir.

Perfectly soft shapes rounded off by a subtle selection of colours and special coatings for a special touch.



2 x 7M



3M




1/2M



3 x 2M



2/3M




4 x 2M



7M



4M



2 x 2M




2M



1/3M

# univerzalni zatamnjivač

## universal dimmer



prilagodljiva jačina  
osvjetljenja

adjustable  
light  
intensity

odabir boje osvjetljenja

choosing  
illumination  
colour

U tami Touch postaje nježno meko ambijentalno svjetlo koje označava mjesto sklopke i nježno osvjetjava. Obilježava mjesto sklopke i nježno osvjetjava mjesto. Možete birati između osam različitih boja nježnog svjetla i prilagoditi jačinu ovisno o vašem raspoloženju.

In the dark Touch becomes a tender soft ambient light. It marks the spot of a switch and gently illuminates a place. You can choose among eight different colours of tender light and adapt its brightness according to your mood.

**TOUCH.**<sup>®</sup>

# svjetlo kakvo nije viđeno prije light as never seen before

Prigušeno svjetlo stvara mirnu, senzualnu i romantičnu atmosferu. To je osobina romantičnih mjesta i mirnih večernjih sati provedenih u domu ili na poslu. Uključivanje je meko i produženo.

Ne samo da produžuje vijek trajanja žarulje, već mijenja tamu u svjetlo na sporiji i znatno ugodniji nacin. Touch vam omogućava zatamnjivanje svjetla bilo gdje, neovisno o vrsti žarulje.

A dimmed light makes peaceful, sensual and romantic atmosphere. It is a trade mark of romantic places and quiet late evening hours spent at home or at work. Switching is soft and extended. It does not only prolong the lamp life expectancy, but also changes darkness into light in a slower and much more pleasant way. Touch enables you to dim the light anywhere, regardless of the type of lamps.



# multimedija

## multimedia



### sve na jednome mjestu

### everything in one place

Vaša je kuća središte vašeg života. Brojni uređaji koje koristite zahtijevaju niz konektora i utičnica. Stvorite vlastito multimedijalno središte, koje će vam omogućiti povezivanje i korištenje brojnih komponenti, sve na jednom mjestu.

Your house is the centre of your life. The multitude of devices you use requires a number of connectors and sockets. Create your own multimedia centre, one that will allow you to connect and use a multiple number of different components in one place.



# inovativna kontrola temperature innovative temperature controller

Povećajte vlastitu udobnost kontroliranjem temperature u vašim životnim i radnim prostorijama tijekom svih godišnjih doba uz pomoć pametnog termostata. Omogućava vam upravljanje uređajima za grijanje i hlađenje, a ima i eko funkciju.

Make yourself comfortable by controlling the temperature in your living and working rooms during all seasons with a smart thermostat. It allows you to control heating and cooling devices and features an eco-function.

udobnost u vašem prostoru  
comfort in your room

23



# prikladnost korištenja

## convenience of use



## TOUCHLESS-bez dodira

Beskontaktna sklopka dopušta vam uživanje u modernom životnom stilu, omogućujući uključivanje i isključivanje svjetla bez potrebe za fizičkim dodirom. Ta je mogućnost vrlo korisna kada imate pune ruke ili uprljane jer možete postići željene osvjetljenje bez nepotrebognog napora.

The touchless switch allows you to enjoy a modern lifestyle, enabling the turning on and off of your lights, without the need for physical interaction. This option is very useful when you find yourself with your hands full, or dirty, as you can achieve the desired lighting without undue fuss.



# moderno osvjetljenje

modern illumination





# 3D lampa

## 3D lamp

Užurbani tempo života izlaže vas konstantnom bombardiraju obiljem informacija. 3D lampe u boji pružaju elegantno rješenje za putokaze. Grafička rješenja možemo prilagoditi vašim željama.

The rapid pace of life means you are constantly being bombarded with a plenty of information. 3D colour lamp provide an elegant solution for information and direction signs. We can make graphics according to your wishes.



# ARX – recite zbogom ključevima

## ARX – say goodbye to keys

ARX ONE vam omogućava siguran i praktičan pristup vašem stanu, kući ili uredu. Dovoljan je samo jedan pokret prstom za otključavanje vrata. Funkcionira kao zasebna jedinica te ne zahtijeva računalnu vezu.

The ARX ONE allows you to gain access to your apartment, house or office securely and conveniently. It takes only a swipe of the finger to unlock the door. It functions as an independent unit and requires no computer connection.

poboljšana sigurnost <sup>29</sup>  
improved security



# individualnost individuality



## načinite po svojem make it your own

Budite drugačiji. Načinite sklopku po svojem ukusu. Možete odabrati između različitih boja okvira te ih za vas možemo ukrasiti prilagođenim grafičkim rješenjima ili znakovima. Odaberite boju osvjetljenja koja odgovara ambijentu vašeg prostora.

Be different. Make a switch according to your taste. You can choose between different frame colours and we can decorate them for you with custom graphics or signs. Choose a illumination colour that suits the ambience of your room.



# modularnost

## modularity



Dizajnirali smo sveobuhvatan sustav koji krase raznoliki elementi, omogućavajući vam kreiranje bilo koje konfiguracije po vašim željama. Osnovni elementi sustava su modularni te mogu biti kombinirani horizontalno ili vertikalno.

We have designed a comprehensive system that features a variety of elements, allowing you to create any configuration you wish. The basic elements of the system are modular and can be combined horizontally or vertically.





**1M =**

**2M =** =

# univerzalnost

## universality

Sustav krasi sveobuhvatan izbor elemenata te jednostavnost ugradnje. Setovi sklopki mogu biti postavljeni na razlicite naocene, neovisno o tome je li kutija okrugla ili pravokutna, izdvojena ili u nizu.

The system features a comprehensive selection of elements and is easy to install. Switch sets can be positioned in many different ways, regardless of whether the box is round or rectangular, individual or serial.



[modulmanager.tem.si](http://modulmanager.tem.si)



Iskušajte „ModulManager“ alat koji će vam pomoći da sastavite onu kombinaciju koju želite.

Try out the “ModulManager” tool, which will help you put together any combination you want.

## rješenja za 4 sklopke

solutions for 4 switches

1/2M ○ ○ ○ ○



2M ○ ○ ○ ○



2M ○ ○



1/3M □ □ □ □



2/3M ○ ○ ○ ○



2/3M ○ ○



4M □



2x2M ○○



2x2M ○○ ○○



4x2M ○○○○




3x2M ○○○○



# MODUL MANAGER



jednostavno i brzo / easy and fast





# konfigurator sklopki i utičnica configurator of switches and sockets

Modul manager vam omogućuje potpunu i brzu izradu popisa prekidača na gradilištu ili u kućnom naslonjaču. Za vas smo pripremili jedinstveni način naručivanja koji je praktičan i brz. Omogućeno vam je kreiranje boja prekidača i oblika okvira kako biste ih prilagodili vašem prostoru ili zahtjevu kupca.

Isprobajte našu aplikaciju, potreban vam je samo mobilni telefon, tablet ili računalo i <http://modulmanager.tem.si>.

The Manager Module allows you to perform a complete and quick inventory of switches from the building site itself or from the comfort of your own home. We have prepared a unique ordering method, which is both practical and quick. You can select the colours of the switches, as well as the shape of the frames, meaning you can tailor them to your space or the client's demands. Why not try us out? All you need is a smartphone, a tablet, or a computer and <http://modulmanager.tem.si>.

# funkcionalnost

## functionality

Modul je razvijen za one koji cijene pomno dizajniran proizvod. Sustav zauzima manje prostora jer bilo koja kombinacija funkcijskih elemenata može biti ugrađena u isti okvir. Prikladan je za nove i obnovljene građevine.

The Modul was developed for those who can appreciate a thoughtfully designed product. The system takes up less space, as any combination of function elements can be fitted inside the same cover plate. It is suitable for new, as well as renovated buildings.



Modul Soft je dostupan i s antibakterijskim rješenjem AB.

The Modul Soft is also available in an antibacterial solution AW.

dekorativni okviri  
decorative cover plates



line

soft

PURE



funkcijski elementi  
function elements




# jednostavnost

## simplicity


Funkcijski elementi jednostavno se ugrađuju u nosač. Rješenje „klik-in, klik-out“ koje smo za vas osmisili smanjiće vrijeme ugradnje. Kontakti spojeva lako su dostupni s prednje strane.

The function elements are easily fitted inside the mounting frame.  
The “klik-in, klik-out” solution we have developed for you will reduce installation time. The connection contacts are easily accessible from the front.

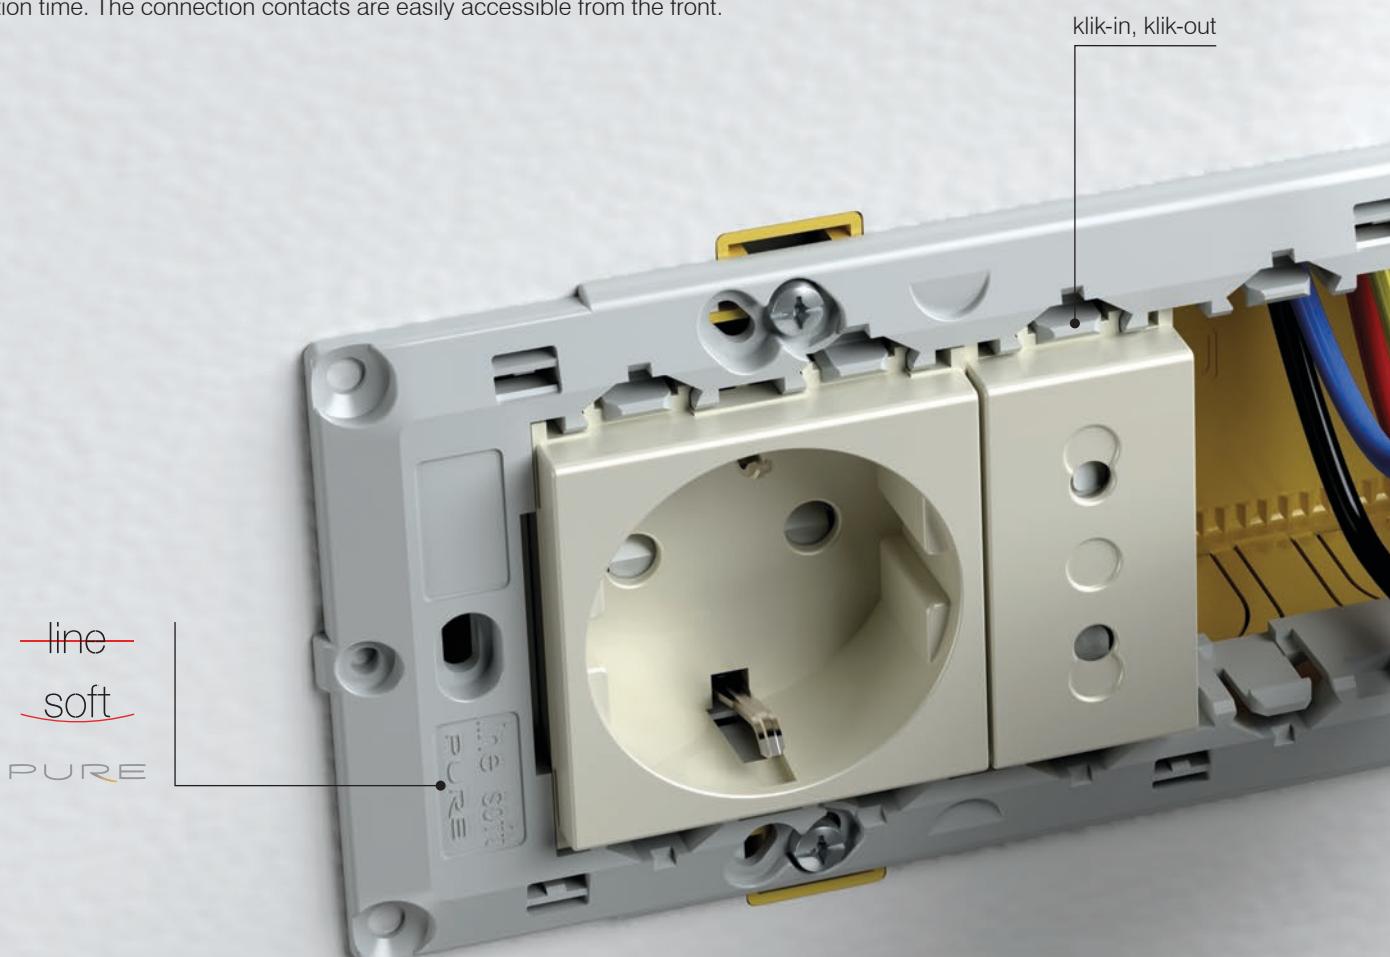




„klick-out“ – brzo i jednostavno, bez potrebe za vijcima.

“klik-out” - simple and quick,  
no screws necessary.



Pravokutne kutije imaju više mesta za žice spajanja.

Rectangular boxes have more space for connection wires.

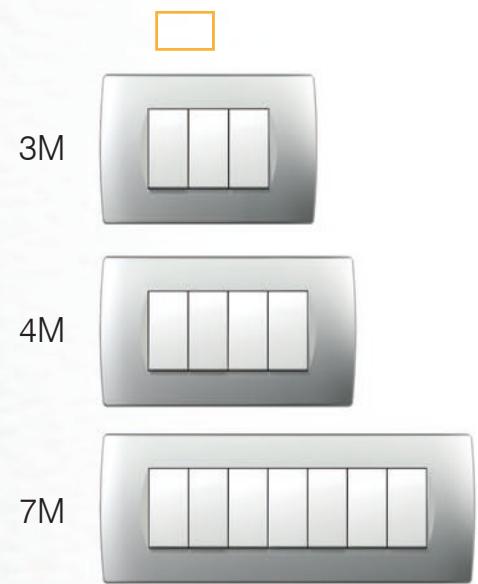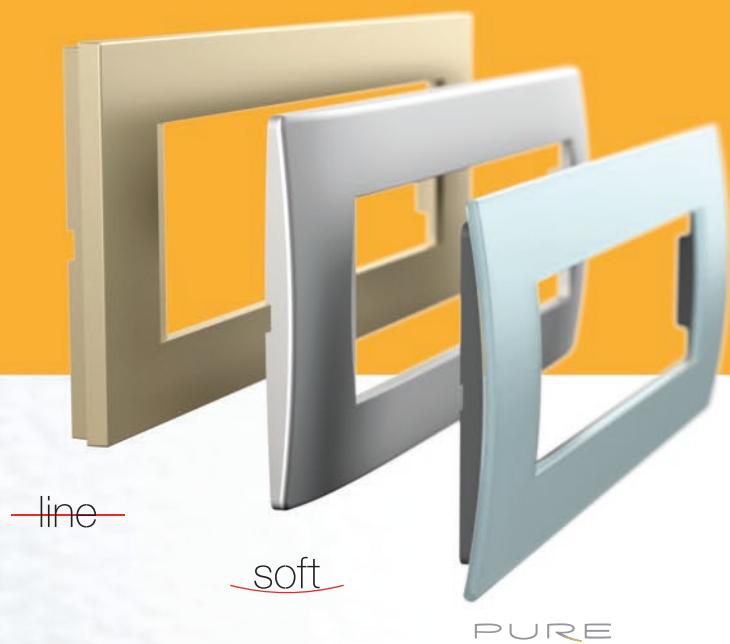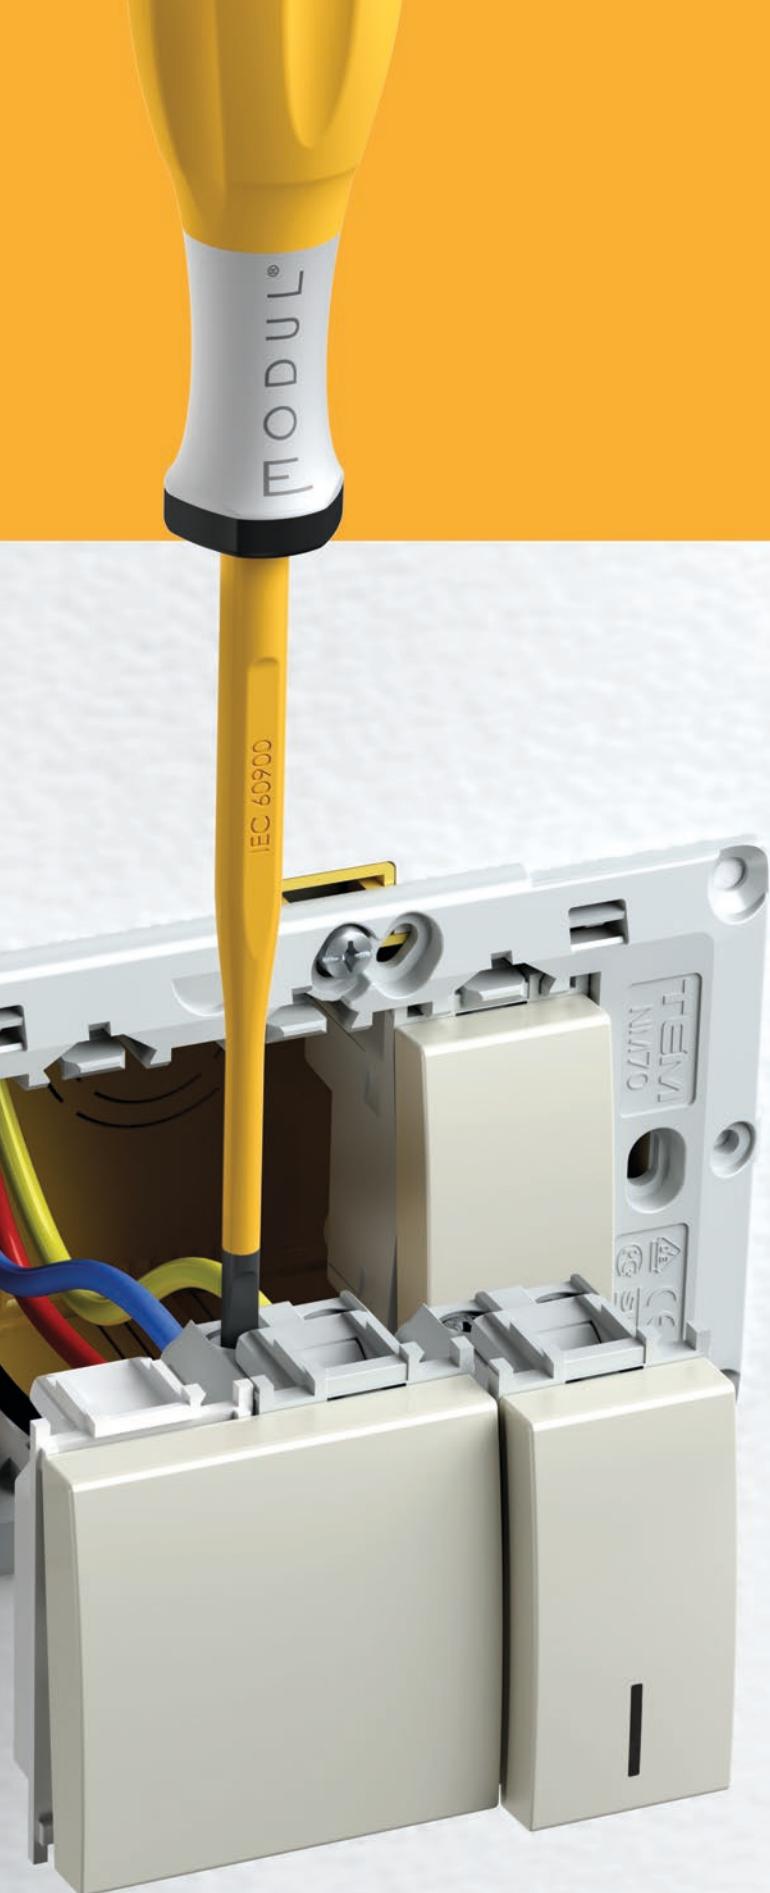


# kombiniranje

## combinability


Modul pruža brojne mogućnosti, čak i s okruglim kutijama. Možete ih kombinirati horizontalno ili vertikalno, zasebno ili u grupama. Metalni ugradbeni okvir osigurava izvrsnu stabilnost, čak i s grubim korištenjem, te je prikladan za sve okvire.

The Modul enables a many possibilities even with round boxes. You can combine them horizontally or vertically, individually or in groups. The metal mounting frame ensures excellent stability even with rough use and is suitable for any decorative cover plates.

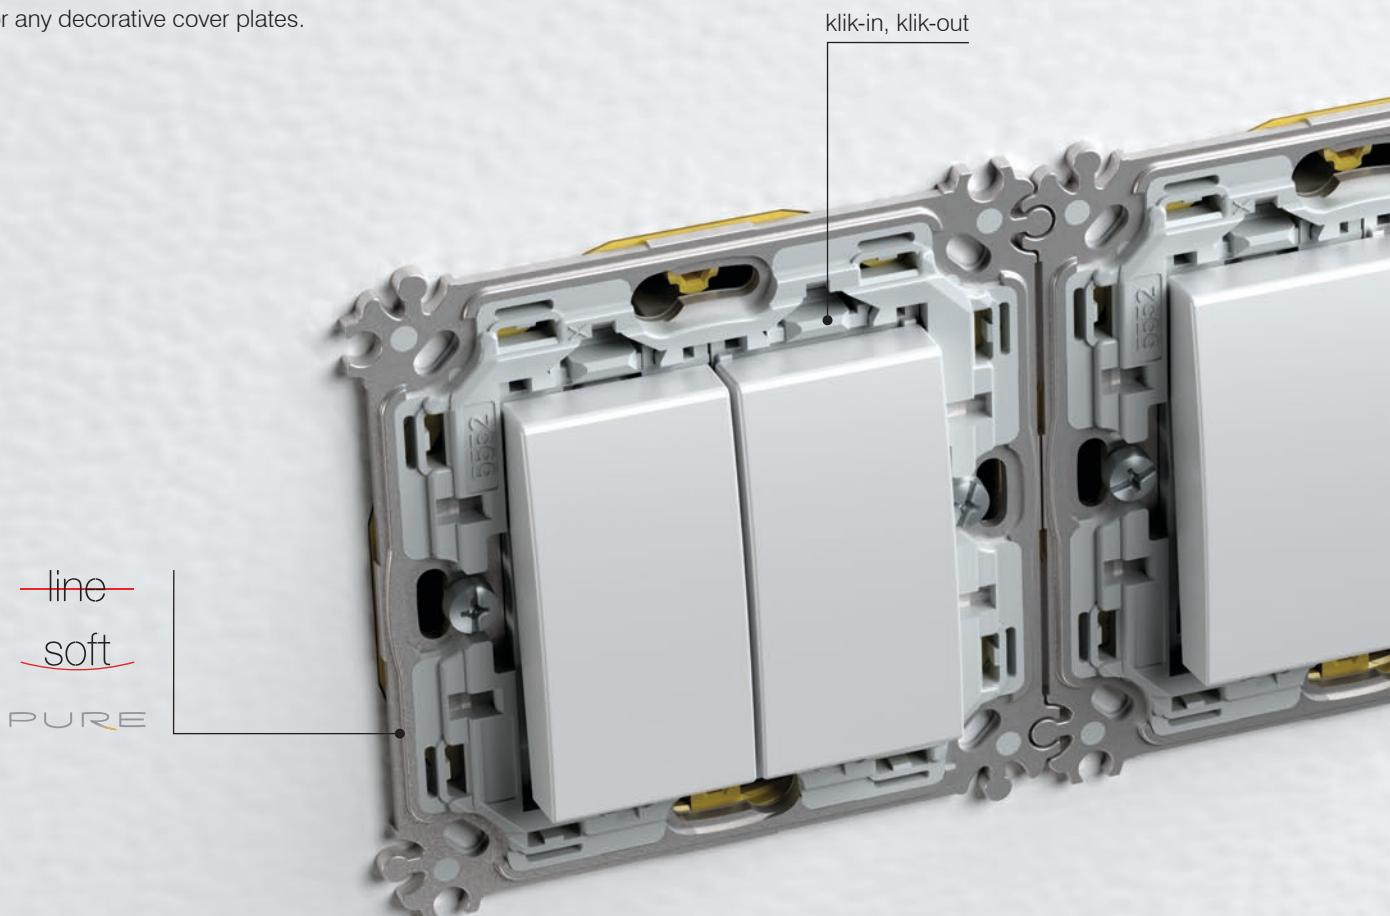


Isti okvir može biti postavljen horizontalno ili vertikalno.

The same cover plate can be positioned horizontally or vertically.



Ugradbeni okvir može biti pričvršćen vijcima ili zupčastim spojevima.

Mounting frames can be fixed with screws or claws.

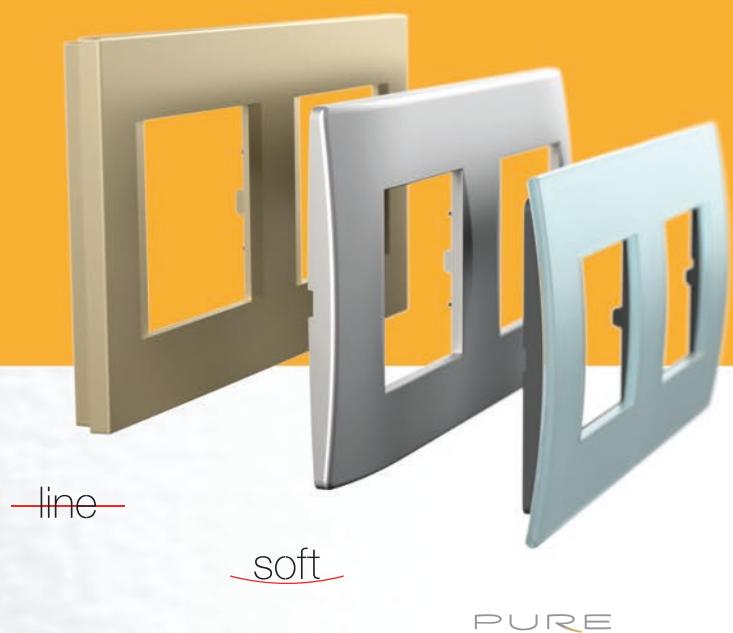

2M ugradbeni okviri lako se spajaju u grupe.

2M mounting frames are easily joined into groups.



# univerzalnost

## universality



2M



line



soft



PURE




2 x 2M




3 x 2M




2M




2 x 2M



3 x 2M




4 x 2M



Sustav je univerzalan te se može ugraditi i u okrugle i u pravokutne kutije.

The system is universal and can be fitted in both round and rectangular boxes.

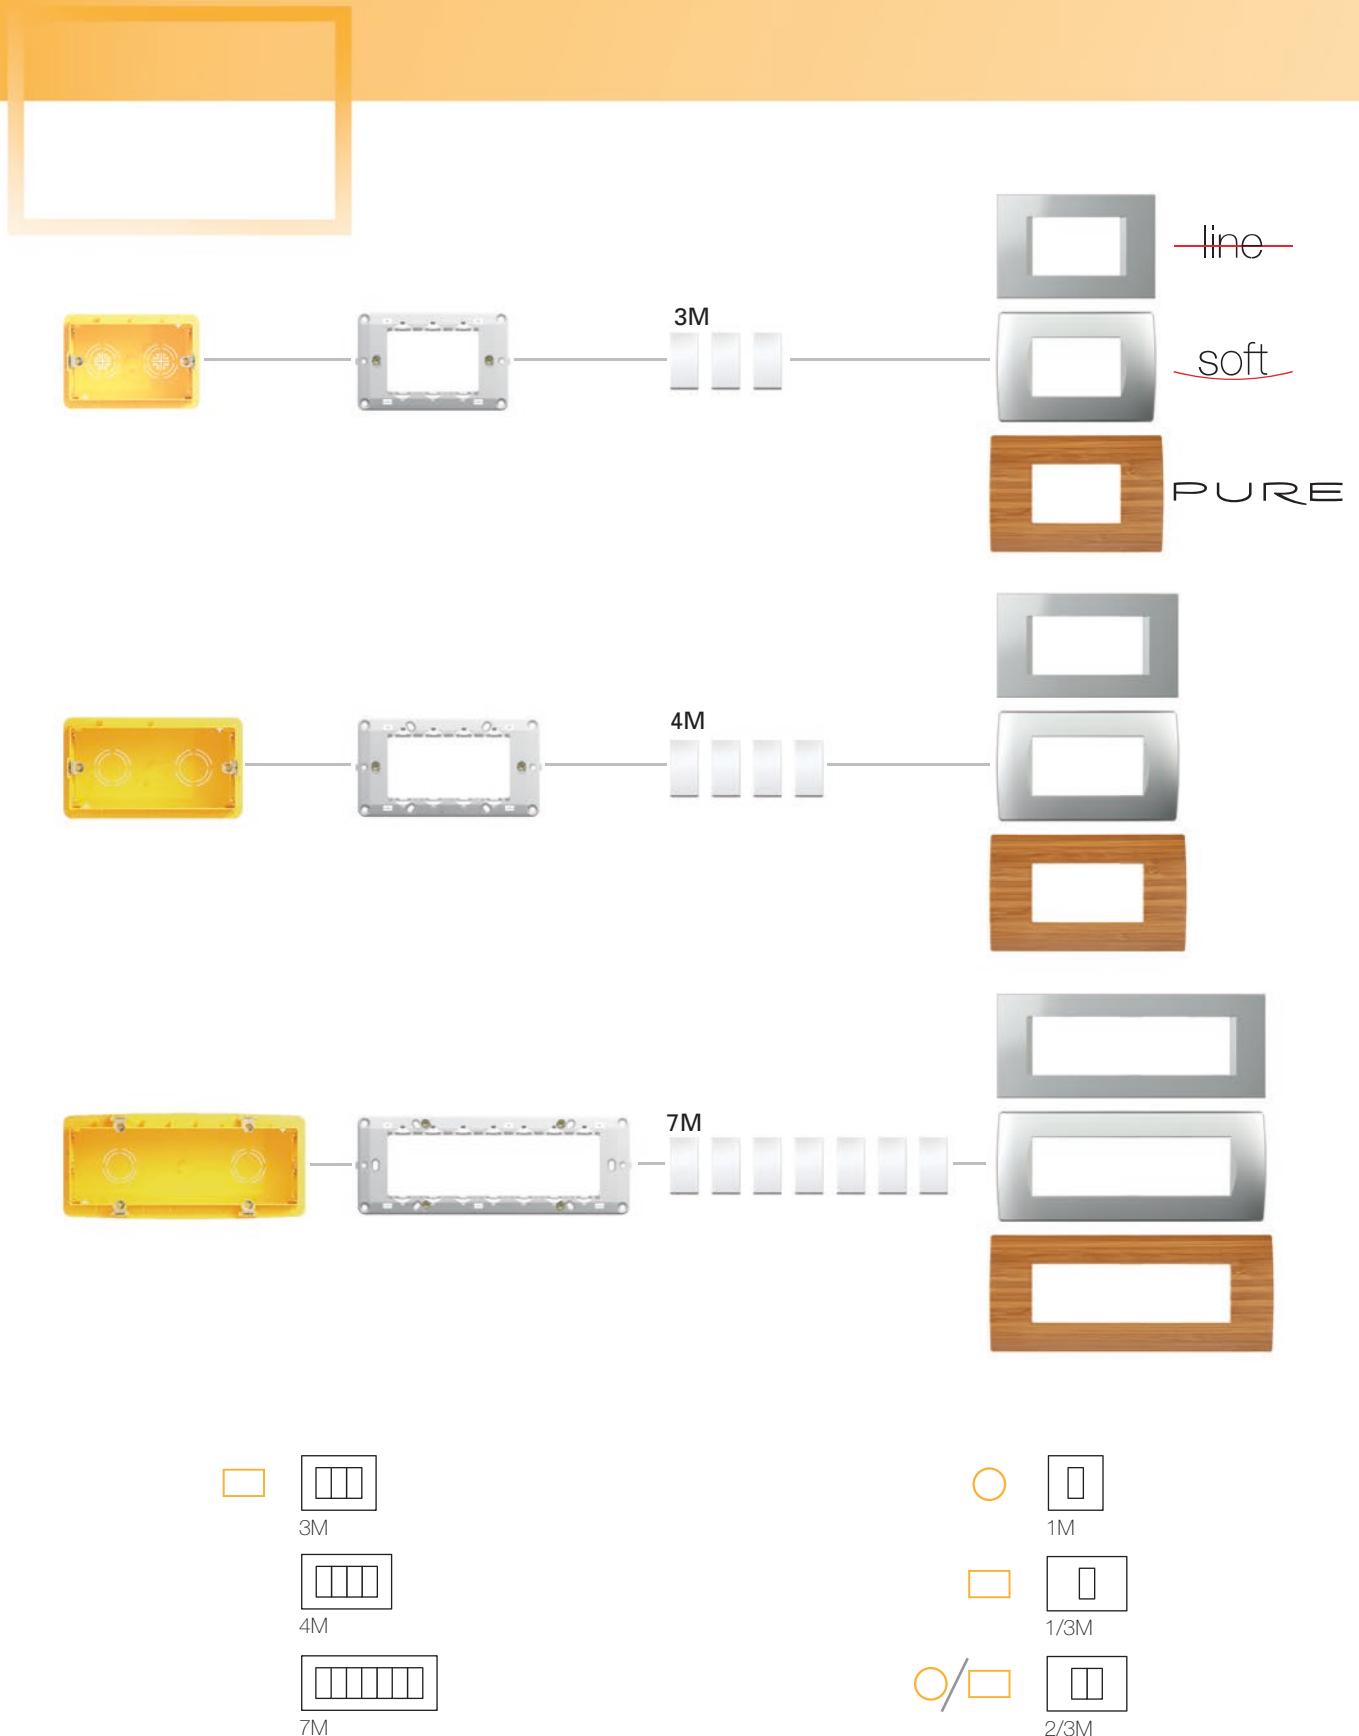

# funkcijski elementi

## function elements



# MODUL



Pouzdano spajanje kod korištenja  
žica različitih debljina.

Reliable connection even when  
different size of wires are used.



Dugotrajnost sklopki te usklađenost s  
međunarodnim standardima.

Long-life of switches and adequacy  
to the international standards.

Dizajnirali smo široku paletu funkcijskih elemenata za Modul obitelj. Možete ih koristiti za dizajniranje jednostavnih i složenih instalacija.

We have designed a wide selection of function element for the Modul family. You can use them to design both simple and complex installations.



• utičnice  
sockets

• zabava  
entertainment

• osvjetljenje  
illumination



Sve su utičnice opremljene sigurnosnim sklopovima koji osiguravaju zaštitu od kontakta s naponom.

All the sockets are equipped with a safety shutters assuring the protection to live contacts.



**16 AX**  
kontakti

Sklopka je vrlo pouzdana zahvaljujući srebrnim zakovicama kontakata.

The switch is highly reliable via its silver rivets contacts.

# jedinstven raspon iskoristivosti unique range of usability

Modul Soft AW  
antibakterijsko rješenje  
antibacterial solution



## MODUL

CUBO IP20

nadžbukna kutija  
surface mounted boxes



CUBO IP55

nadžbukna kutija  
surface mounted boxes



IP44

podžbukna ugradnja  
flush mounted



Opremate li vaš dom, ured ili radionicu? Modul je prikladan kako za stambene, tako i za radne prostore te privatne i javne zgrade. Jedinstven je po tome što sklopke i utičnice mogu biti ugrađene gdje god se za to ukaže potreba.

Are you furnishing your home, office or workshop? The Modul is suitable for living as well as working spaces and both private and public buildings. It is unique in that the switches and sockets can be fitted wherever they are needed.

**D**

cigla  
brick




**H**

šupljiji zid  
hollow wall



**B**

beton  
concrete



● funkcionalni elementi /  
function elements

sklopke / switches  
utičnice / sockets  
komunikacije / communications  
senzori / sensors  
regulatori / regulators  
rasvjetna tijela / illuminations

**MA**

parapetni kanali  
trunking systems



**MO**

razdjelni ormarići  
distribution boards



**MT**

podne kutije  
floor boxes




# podžbukna rješenja


## flush mounted solutions

cigla / brick

Modul je prikladan za sve vrste zidova te se može koristiti u konvencionalnim šupljim zidovima ili betonskim konstrukcijama. Jednostavno se ugrađuje i omogućuje vam kombiniranje pravokutnih ili okruglih kutija na odgovarajućoj udaljenosti. Materijali koji se koriste usklađeni su s visokim standardima.

The Modul is suitable for all wall types and can be used in conventional, hollow wall or concrete constructions. It is easy to install and enables you to combine rectangular or round boxes at the proper distances. The materials used are compliant with high standards.

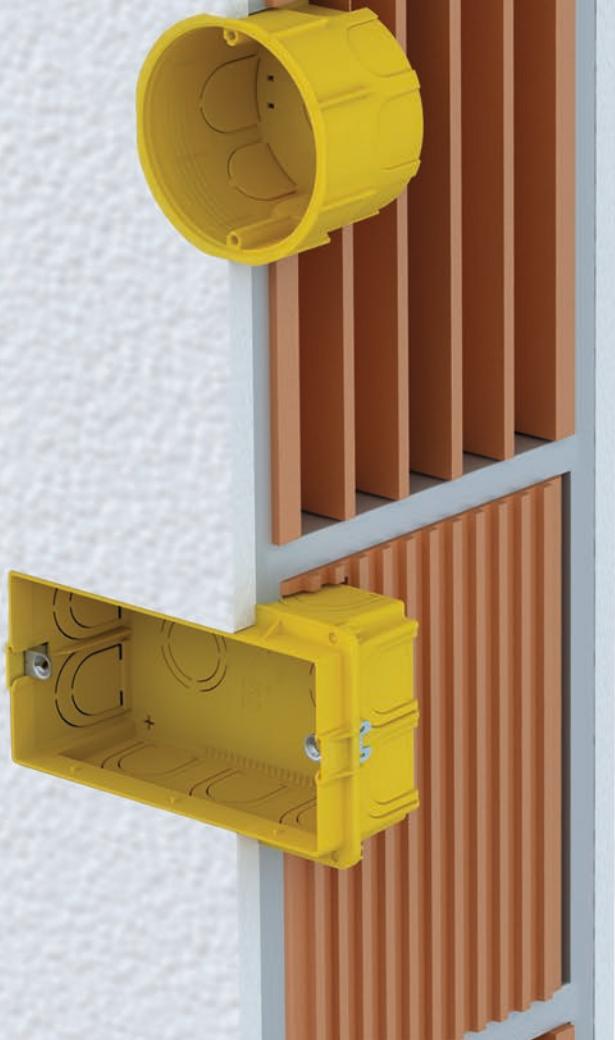

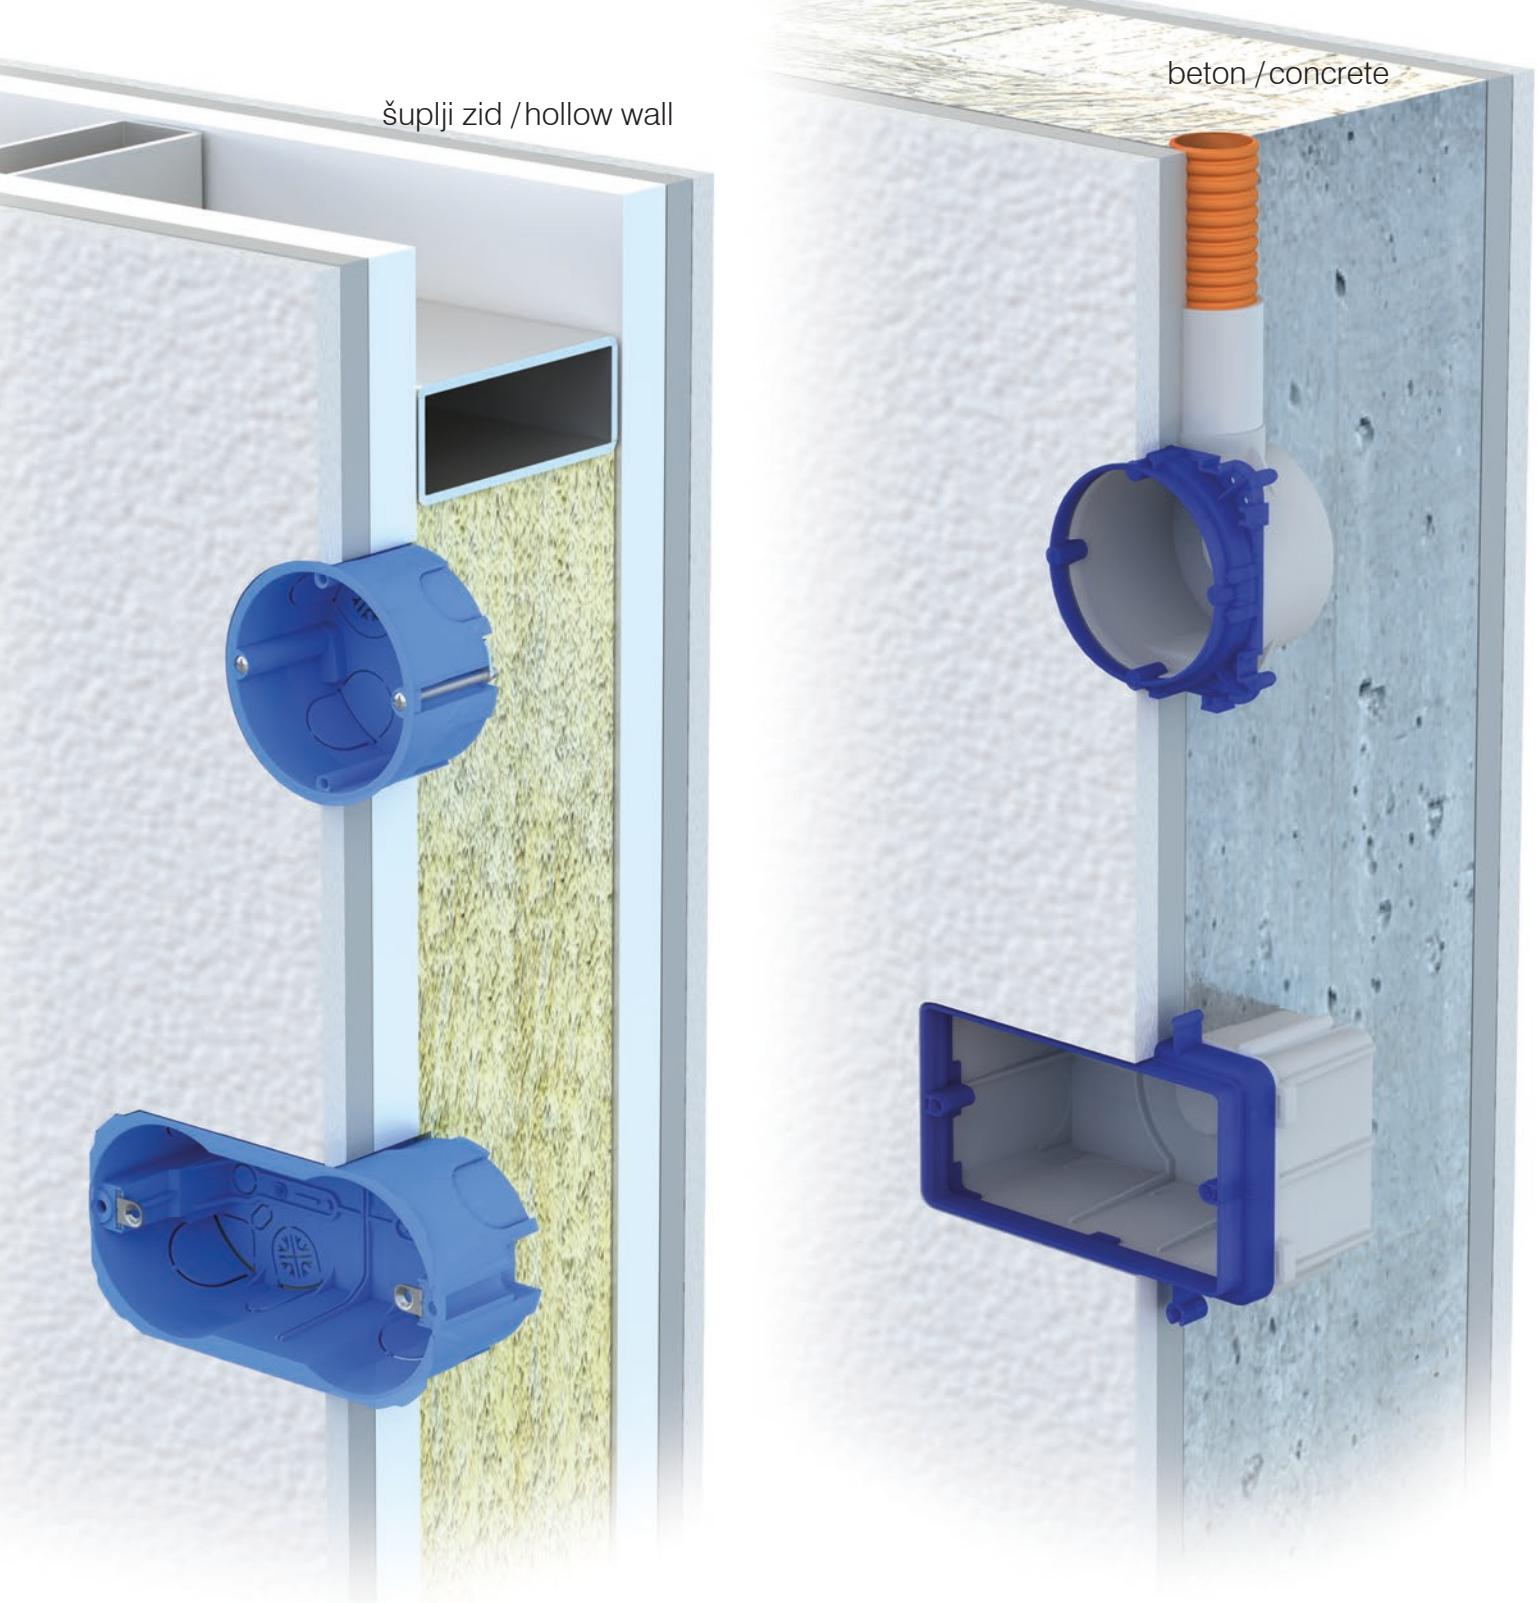


# ostala rješenja

## other solutions

IP44  
podžbukna ugradnja  
flush mounted



CUBO IP20  
nadžbukna kutija  
surface mounted boxes

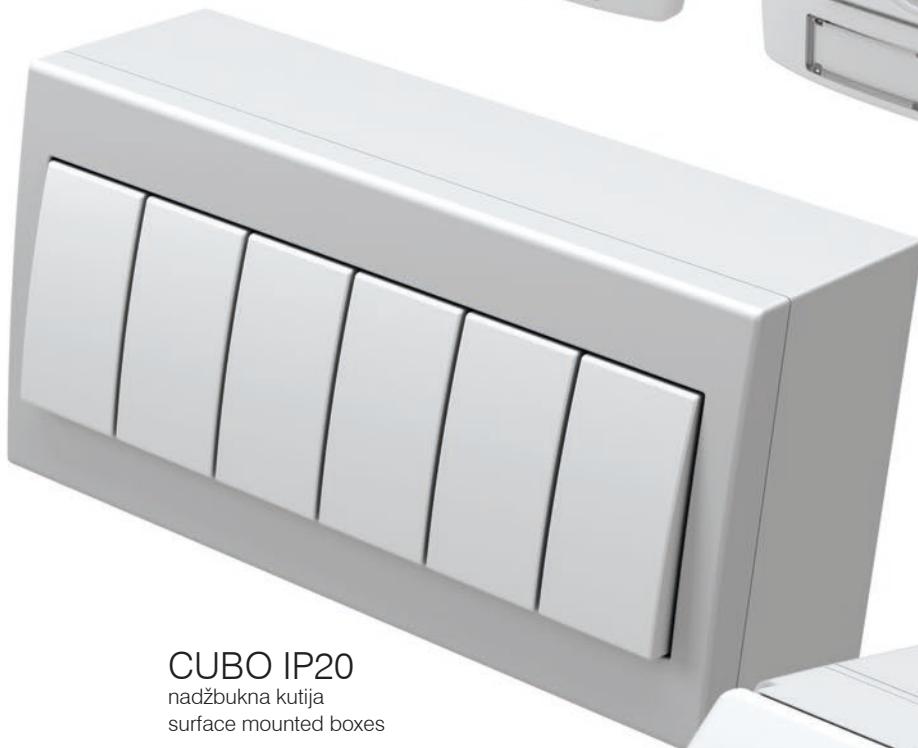

CUBO IP55  
nadžbukna kutija  
surface mounted boxes




Trebate li rješenje za sklopku ili utičnicu u nadžbuknoj, podžbuknoj ili podnoj varijanti? Modul pruža različita rješenja ugradnje s razlicitim IP zaštitama, za parapetne kanale, razdjelne ormariće ili podne kutije. Odabir je na vama.

Do you need switch or socket in flush, surface or floor solution?  
The Modul provides different mounting solutions with different IP protections, for trunking systems, distribution boards or floor boxes.  
The choice is yours.



**MA**

parapetni kanali  
trunking systems

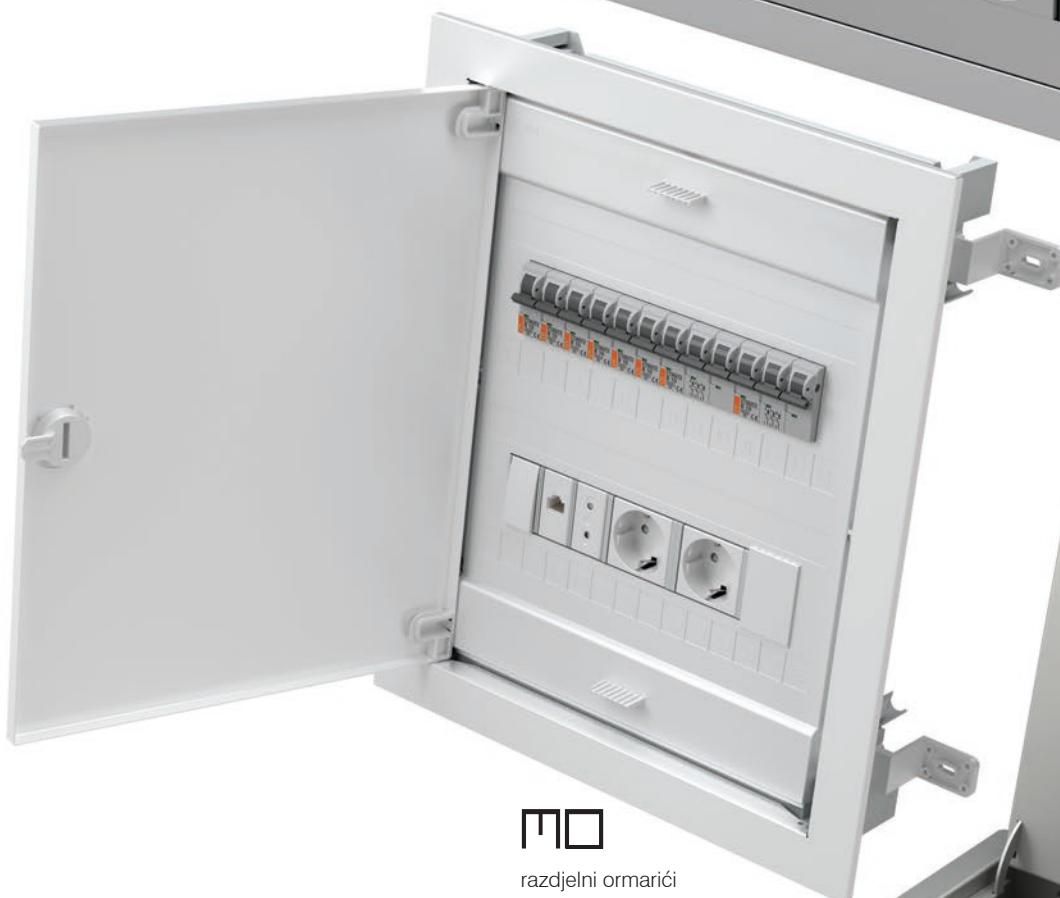

**MO**

razdjeljni ormarići  
distribution boards

**MT**

podne kutije  
floor boxes



# tehnički katalog

technical catalogue



## MODUL

— funkcijski elementi  
*function elements*



56

dizajn  
*design*

PURE  
—  
line  
soft



104

kutija  
*boxes*



124

distribucija  
*distribution*



146

## Ekonomik —

## fontana —



170



198

**TEM**




KATALOG /  
CATALOGUE

# MODUL

FUNKCIJSKI ELEMENTI  
FUNCTION ELEMENTS

SKLOPKE SM  
SWITCHES SM  58

TIPKE TM  
BUTTONS TM  63

OSVJETLJENJE IA  
ILLUMINATION IA  66

UTIČNICE VM  
SOCKETS VM  68

KOMUNIKACIJE KM  
COMMUNICATIONS KM  72

DODACI KOMUNIKACIJA KA  
COMMUNICATION ACCESSORIES KA  78

ELEKTRONIKA EM  
ELECTRONICS EM  80

SETOVI CM  
SETS CM  96

ANTIBAKTERIJSKI PROGRAM AW  
ANTIBACTERIAL PROGRAM AW  100

DIZAJN  
DESIGN

OKVIRI PURE OP  
COVER PLATES PURE OP  104

OKVIRI LINE OL  
COVER PLATES LINE OL  108

OKVIRI SOFT OS  
COVER PLATES SOFT OS  112

NOSAČI NM  
MOUNTING FRAMES NM  120

tip type	naziv description	tehnički podaci technical data	veličina size	boja colour	opcijski podaci 1 optional data 1	opcijski podaci 2 optional data 2
SM10	SKLOPKA JEDNOPOLNA SWITCH 1WAY	16AX 250V~	1M	<input type="checkbox"/> PW bijela sjajna polar white	NT neutralna neutral	01
SM11	TIPKALO JEDNOPOLNO PUSH BUTTON 1WAY	16A 250V~	1M	<input checked="" type="checkbox"/> SB crna mat soft touch black		
SM12	SKLOPKA JEDNOPOLNA SWITCH 1WAY	20A 250V~	1M	<input type="checkbox"/> ES srebrna mat elox silver	IN indikator indicator	02
.	.	.	.	<input type="checkbox"/> IW bež sjajna ivory white		03
.	.	.	.			
.	.	.	.			

## SKLOPKA JEDNOPOLNA 16AX 250V~ 1M




SM10

- sklopka bez tipke
- 16AX 250V~, tip SM10
- sukladno normi EN 60669-1
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

**SWITCH 1WAY 16AX 250V~ 1M**

- switch without button
- 16AX 250V~, type SM10
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>



## TIPKALO JEDNOPOLNO 16A 250V~ 1M




SM11

- tipkalo bez tipke
- 16A 250V~, tip SM11
- sukladno normi EN 60669-1
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

**PUSH BUTTON 1WAY 16AX 250V~ 1M**

- push button without button
- 16A 250V~, type SM11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>



## SKLOPKA JEDNOPOLNA 20A 250V~ 1M




SM12

- sklopka bez tipke
- 20A 250V~, tip SM12
- sukladno normi EN 60669-1
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

**SWITCH 1WAY 20A 250V~ 1M**

- switch without button
- 20A 250V~, type SM12
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>



## SKLOPKA DVOPOLNA 16AX 250V~ 1M




SM20

- sklopka bez tipke
- 16AX 250V~, tip SM20
- sukladno normi EN 60669-1
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- samo u kombinaciji s tipkom TM15

**SWITCH 2POLE 16AX 250V~ 1M**

- switch without button
- 16AX 250V~, type SM20
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>
- only in combination with button TM15




## SWITCHES SM

## MODUL




SM40




SKLOPKA ŽALUZIJSKA 1-0-2 16AX 250V~ 1M

- sklopka bez tipke
  - 16AX 250V~, tip SM40
  - sukladno normi EN 60669-1
  - vičjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- SWITCH SHUTTERS 1-0-2 16AX 250V~ 1M**
- switch without button
  - 16AX 250V~, type SM40
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>




SM41




TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M

- tipkalo bez tipke
  - 16A 250V~, tip SM41
  - sukladno normi EN 60669-1
  - vičjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- PUSH BUTTON SHUTTERS 1-0-2 16A 250V~ 1M**
- push button without button
  - 16A 250V~, type SM41
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>




SM60




SKLOPKA IZMJENIČNA 16AX 250V~ 1M

- sklopka bez tipke
  - 16AX 250V~, tip SM60
  - sukladno normi EN 60669-1
  - vičjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- SWITCH 2WAY 16AX 250V~ 1M**
- switch without button
  - 16AX 250V~, type SM60
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>




SM61




TIPKALO IZMJENIČNO 16A 250V~ 1M

- tipkalo bez tipke
  - 16A 250V~, tip SM61
  - sukladno normi EN 60669-1
  - vičjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- PUSH BUTTON 2WAY 16A 250V~ 1M**
- push button without button
  - 16A 250V~, type SM61
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>




\* elektronika /  
electronics

SM70



SKLOPKA KRIŽNA 16AX 250V~ 1M

- sklopka bez tipke
  - 16AX 250V~, tip SM70
  - sukladno normi EN 60669-1
  - vičjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- SWITCH INTERMEDIATE 16AX 250V~ 1M**
- switch without button
  - 16AX 250V~, type SM70
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>

1M = 22,5 x 45  
2M = 45 x 45



PW bijela sjajna  
polar white



SB crna mat  
soft touch black




ES srebrna mat  
elox silver



IW bež sjajna  
ivory white

#### SKLOPKA JEDNOPOLNA 16AX 250V~ 1M

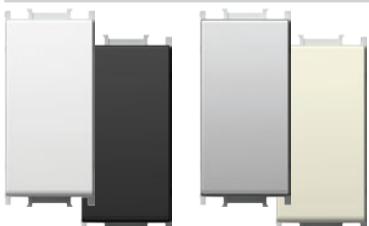

SM10PW  
 SM10SB  
 SM10ES  
 SM10IW

- 16AX 250V~, tip SM10
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

#### SWITCH 1WAY 16AX 250V~ 1M

- 16AX 250V~, type SM10
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- replaceable button



#### SKLOPKA JEDNOPOLNA 16AX 250V~ 1M \_ IN



SM10PWIN  
 SM10SBIN  
 SM10ESIN  
 SM10IWIN


- IN indikator
- 16AX 250V~, tip SM10
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- tijanjica nije ugrađena
- zamjenjiva tipka

#### SWITCH 1WAY 16AX 250V~ 1M \_ IN

- IN indicator
- 16AX 250V~, type SM10
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- lamp is not included
- replaceable button



#### TIPKALO JEDNOPOLNO 16A 250V~ 1M

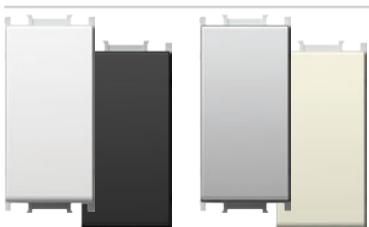

SM11PW  
 SM11SB  
 SM11ES  
 SM11IW

- 16A 250V~, tip SM11
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

#### PUSH BUTTON 1WAY 16A 250V~ 1M

- 16A 250V~, type SM11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- replaceable button



#### TIPKALO JEDNOPOLNO 16A 250V~ 1M \_ IN 01



SM11PWIN01  
 SM11SBIN01  
 SM11ESIN01  
 SM11IWIN01

- indikatorsko zvono IN 01
- 16A 250V~, tip SM11
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- tijanjica nije ugrađena
- zamjenjiva tipka

#### PUSH BUTTON 1WAY 16A 250V~ 1M \_ IN 01

- IN 01 indicator bell
- 16A 250V~, type SM11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- lamp is not included
- replaceable button



## S W I T C H E S S M




- SM11PWIN02
- SM11SBIN02
- SM11ESIN02
- SM11IWIN02

## TIPKALO JEDNOPOLNO 16A 250V~ 1M \_ IN 02

- svjetlosna indikacija IN 02
- 16A 250V~, tip SM11
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- tijanjica nije ugrađena
- zamjenjiva tipka

## PUSH BUTTON 1WAY 16A 250V~ 1M \_ IN 02

- IN 02 indicator light
- 16A 250V~, type SM11
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- lamp is not included
- replaceable button

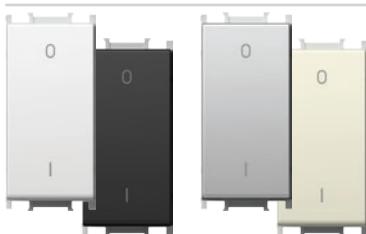

- SM20PWNT03
- SM20SBNT03
- SM20ESNT03
- SM20IWNNT03

## SKLOPKA DVOPOLNA 16AX 250V~ 1M \_ NT 03

- NT 03 neutralna 0-1
- 16AX 250V~, tip SM20
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

## SWITCH 2POLE 16AX 250V~ 1M \_ NT 03

- NT 03 neutral 0-1
- 16AX 250V~, type SM20
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- lamp is not included
- replaceable button



- SM20PWIN
- SM20SBIN
- SM20ESIN
- SM20IWIN

## SKLOPKA DVOPOLNA 16AX 250V~ 1M \_ IN

- IN indikator
- 16AX 250V~, tip SM20
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- tijanjica nije ugrađena
- zamjenjiva tipka

## SWITCH 2POLE 16AX 250V~ 1M \_ IN

- IN indicator
- 16AX 250V~, type SM20
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- lamp is not included
- replaceable button



- SM40PWNT10
- SM40SBNT10
- SM40ESNT10
- SM40IWNNT10

## SKLOPKA ŽALUZIJSKA 1-0-2 16AX 250V~ 1M \_ NT 10

- NT 10 neutralna 1-0-2
- 16AX 250V~, tip SM40
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

## SWITCH SHUTTERS 1-0-2 16AX 250V~ 1M \_ NT 10

- NT 10 neutral 1-0-2
- 16AX 250V~, type SM40
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>
- replaceable button




- SM41PWNT10
- SM41SBNT10
- SM41ESNT10
- SM41IWNNT10

## TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M \_ NT 10

- NT 10 neutralna 1-0-2
- 16A 250V~, tip SM41
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

## PUSH BUTTON SHUTTERS 1-0-2 16A 250V~ 1M \_ NT 10

- NT 10 neutral 1-0-2
- 16A 250V~, type SM41
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>
- replaceable button

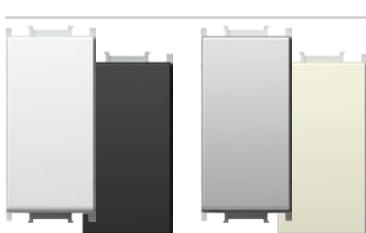

- SM60PW
- SM60SB
- SM60ES
- SM60IW


## SKLOPKA IZMJENIČNA 16AX 250V~ 1M

- 16AX 250V~, tip SM60
- sukladno normi EN 60669-1
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

## SWITCH 2WAY 16AX 250V~ 1M

- 16AX 250V~, type SM60
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- replaceable button



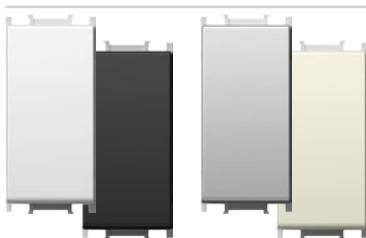

- SM61PW
- SM61SB
- SM61ES
- SM61IW

#### TIPKALO IZMJENIČNO 16A 250V~ 1M

- 16A 250V~, tip SM61  
- sukladno normi EN 60669-1  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- zamjenjiva tipka

#### PUSH BUTTON 2WAY 16A 250V~ 1M

- 16A 250V~, type SM61  
- in accordance with EN 60669-1  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- replaceable button



- SM62PWCD
- SM62BCD
- SM62ESCD
- SM62IWCD

#### TIPKALO IZMJENIČNO S UZICOM 16A 250V~ 1M \_ CD

- CD indikator + uzica  
- duljina uzice 1,5 m  
- 16A 250V~, tip SM62  
- sukladno normi EN 60669-1  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

#### PUSH BUTTON 2WAY WITH CORD 16A 250V~ 1M \_ CD

- CD indicator+cord  
- cord lenght 1.5m  
- 16A 250V~, type SM62  
- in accordance with EN 60669-1  
- screw contacts 1.5-2.5 mm<sup>2</sup>



- SM70PW
- SM70SB
- SM70ES
- SM70IW

#### SKLOPKA KRIŽNA 16AX 250V~ 1M


- 16AX 250V~, tip SM70  
- sukladno normi EN 60669-1  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- zamjenjiva tipka

#### SWITCH INTERMEDIATE 16AX 250V~ 1M


- 16AX 250V~, type SM70  
- in accordance with EN 60669-1  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- replaceable button



1M = 22,5 x 45  
2M = 45 x 45



## BUTTONS TM



03


TM11

PW

NT

tip type	naziv description	tehnički podaci	veličina size	boja colour	opcijski podaci 1 optional data 1	opcijski podaci 2 optional data 2
TM11	TIPKA BUTTON		1M	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>	NT neutralna <i>neutral</i>	 01
TM12	TIPKA BUTTON		2M	<input checked="" type="checkbox"/> SB crna mat <i>soft touch black</i>	 IN indikator <i>indicator</i>	 02
TM21	SLIJEPI ELEMENT BLANK		1M	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>		 03
				<input type="checkbox"/> IW bež sjajna <i>ivory white</i>		 04

## TIPKA 1M

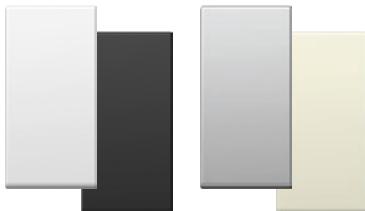


- TM11PW
- TM11SB
- TM11ES
- TM11IW

- zamjenjiva tipka 1M
  - sukladno normi EN 60669-1
- BUTTON 1M**
- replaceable button 1M
  - in accordance with EN 60669-1



- TM11PWIN
- TM11SBIN
- TM11ESIN
- TM11IWIN

- zamjenjiva tipka 1M
  - sukladno normi EN 60669-1
- BUTTON 1M INDIKATOR**
- replaceable button 1M
  - in accordance with EN 60669-1

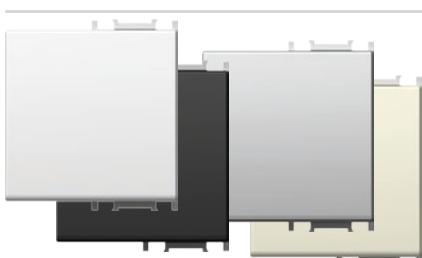


- TM12PW
- TM12SB
- TM12ES
- TM12IW

- zamjenjiva tipka 2M s nosačem tipke
- za nadogradnju sklopke ili tipke s veličine 1M na veličinu 2M.
- sukladno normi EN 60669-1

## BUTTON 2M

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1

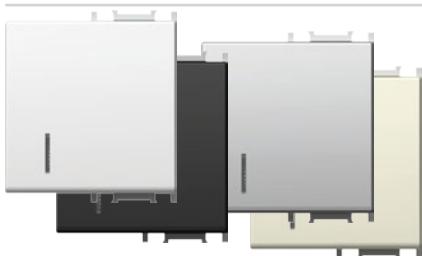


- TM12PWIN
- TM12SBIN
- TM12ESIN
- TM12IWIN

- zamjenjiva tipka 2M s nosačem tipke
- za nadogradnju sklopke ili tipke s veličine 1M na veličinu 2M.
- sukladno normi EN 60669-1

## BUTTON 2M INDIKATOR

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1



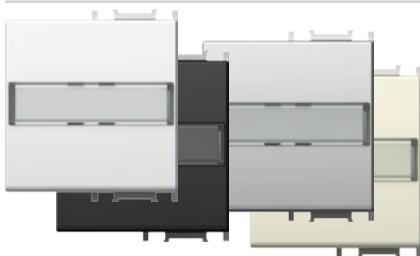


- TM13PWIL
- TM13SBIL
- TM13ESIL
- TM13IWIL

#### TIPKA 2M S NATPISNOM PLOČICOM

- zamjenjiva tipka 2M s nosačem tipke
- upotrebljava se pri nadogradnji sklopke ili tipkala od veličine 1M na veličinu 2M
- sukladno normi EN 60669-1

#### BUTTON 2M WITH INSCRIPTION PLATE

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1

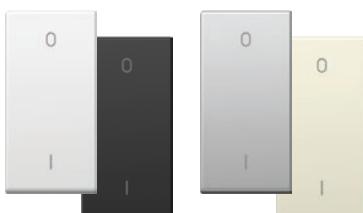


- TM15PW
- TM15SB
- TM15ES
- TM15IW

#### TIPKA 1M DVOPOLNA

- zamjenjiva tipka 1M
- samo u kombinaciji s mehanizmom SM20
- sukladno normi EN 60669-1

#### BUTTON 1M 2POLE

- replaceable button 1M
- only in combination with mechanism SM20
- in accordance with EN 60669-1

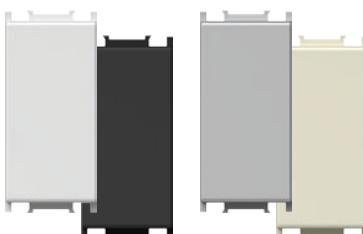

- TM21PW
- TM21SB
- TM21ES
- TM21IW

#### SLIJEPI ELEMENT 1M

- slijepi element za popunjavanje praznog mesta
- sukladno normi EN 60669-1

#### BLANK 1M

- blank modul to fill up empty spaces
- in accordance with EN 60669-1




- TM22PW
- TM22SB
- TM22ES
- TM22IW

#### SLIJEPI ELEMENT 2M

- slijepi element za popunjavanje praznog mesta
- sukladno normi EN 60669-1

#### BLANK 2M

- blank modul to fill up empty spaces
- in accordance with EN 60669-1

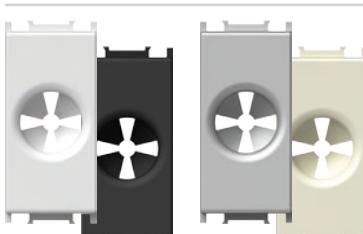

- TM31PW
- TM31SB
- TM31ES
- TM31IW

#### UVODNICA 1M


- uvodnica za kabel
- sukladno normi EN-60669-1

#### CABLE OUTLET 1M

- outlet for cable
- in accordance with EN-60669-1



1M = 22,5 x 45  
2M = 45 x 45

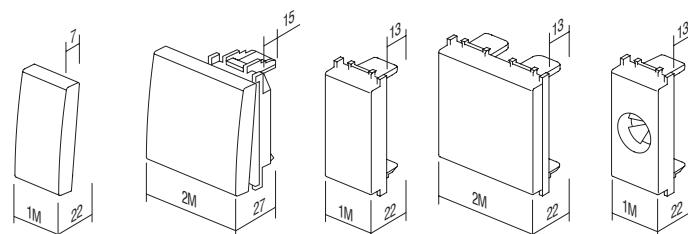

TM11  
TM15

TM12  
TM13


TM21

TM22

TM31

## B U T T O N S   T M

## MODUL

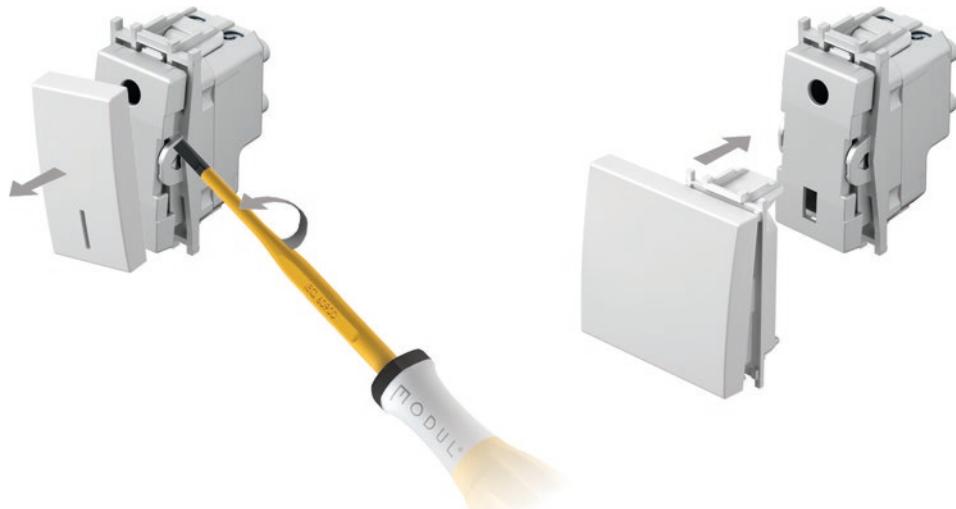

## LASERSKO GRAVIRANJE NA TIPKAMA

- lasersko graviranje proizvoljne grafike na označenome mjestu
- standardni simboli dostupni sa skladišta, ostali na zahtjev

*LASER PRINT ON BUTTONS*

- laser print of any graphics on marked locations
- standard symbols from stock, other on request



1M

A
B
C

2M

A	D	G
B	E	H
C	F	I


## SIMBOLI

## SYMBOLS

01	02	03	04	05	06	07	08	09	10	11	12	20	21	22	23
!	!	0	0	!	!	!	!	!	!	!	!	+	-	!	!
24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39
!	!	!	!	!	!	!	!	!	!	!	!	!	!	!	!
40	41	42	43	44	45	46	47	48							
!	!	!	!	!	!	!	!	!							

## STANDARDNI SIMBOLI

## STANDARD SYMBOLS

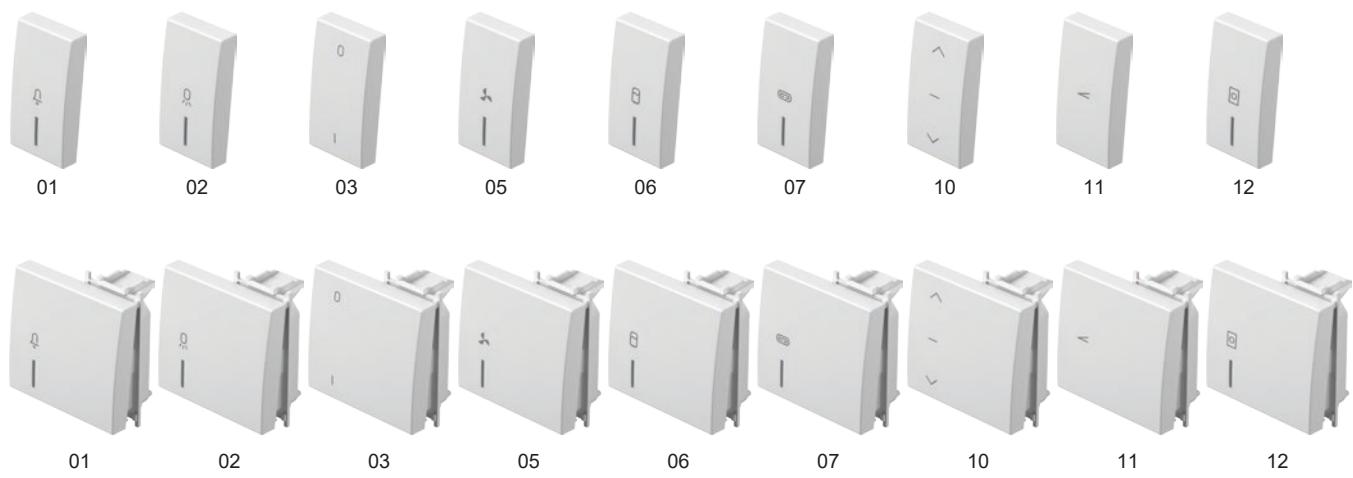

tip type	naziv description	tehnički podaci technical data	boja colour
IA10	NEONSKA TINJALICA NEON LAMP	230V~ 0,34W	<input type="checkbox"/> WH bijela white
IA20	LED TINJALICA LED LAMP	230V~ 0,40W	<input checked="" type="checkbox"/> BL plava blue
IA21	LED TINJALICA LED LAMP	24V AC/DC 0,20W	<input checked="" type="checkbox"/> RD crvena red
.	.	.	<input checked="" type="checkbox"/> GR zelena green
.	.	.	<input checked="" type="checkbox"/> OR narančasta orange

**NEONSKA TINJALICA 230V~ 0,34W**

■ IA10OR

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**NEON LAMP 230V~ 0,34W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator

**LED TINJALICA 230V AC/DC 0,40W**

IA20WH  
 IA20GR  
 IA20RD  
 IA20BL

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**LED LAMP 230V AC/DC 0,40W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator

**LED TINJALICA 24V AC/DC 0,20W**

IA21WH  
 IA21RD

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**LED LAMP 24V AC/DC 0,20W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator

**LED TINJALICA 12V AC/DC 0,10W**


IA22WH  
 IA22RD

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom


**LED LAMP 12V AC/DC 0,10W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator










\* Indikacija /  
Indication



Rasvjetna tijela /  
Illumination




Stalno osvjetljenje /  
Constant illumination

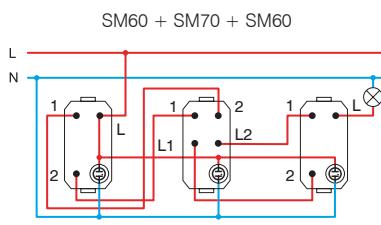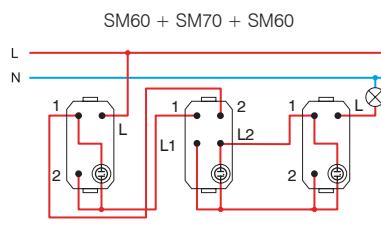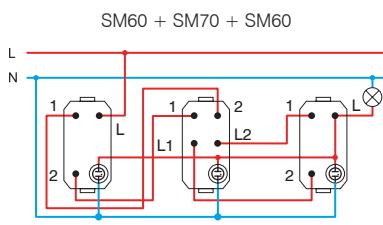

\* spojne shema kompaktne fluorescentne tinjalice (CFL) /  
wiring scheme for compact fluid lamp (CFL)

1M = 22,5 x 45  
2M = 45 x 45





**VM11**      **PT**

tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
VM10	UTIČNICA ŠUKO+KS SOCKET SCHUKO+KS	2P+E 16A 250V~	2M	<input type="checkbox"/> PW bijela sjajna polar white
VM11	UTIČNICA ŠUKO+KS+POKLOPAC SOCKET SCHUKO+KS+COVER	2P+E 16A 250V~	2M	<input checked="" type="checkbox"/> SB crna mat soft touch black
VM20	UTIČNICA EURO+KS SOCKET EURO+KS	2P 10A 250V~	1M	<input type="checkbox"/> ES srebrna mat elox silver
.	.	.	.	<input type="checkbox"/> IW bijela ivory white
.	.	.	.	<input type="checkbox"/> RD crvena red
.	.	.	.	<input type="checkbox"/> GR zelena green
.	.	.	.	<input type="checkbox"/> OR narančasta orange
				<input checked="" type="checkbox"/> PT bijela+prozirna white+transparent
				<input checked="" type="checkbox"/> BT lagani dodir soft touch black+transparent
				<input type="checkbox"/> ST srebrna+prozirna silver+transparent
				<input type="checkbox"/> IT bež+prozirna ivory+transparent
				<input checked="" type="checkbox"/> RT crvena+prozirna red+transparent
				<input checked="" type="checkbox"/> GT zelena+prozirna green+transparent
				<input checked="" type="checkbox"/> OT narančasta+prozirna orange+transparent
				<input type="checkbox"/> PP bijela+bijela white+white
				<input checked="" type="checkbox"/> BB lagani dodir soft touch black+black
				<input type="checkbox"/> SS srebrna+srebrna silver+silver
				<input type="checkbox"/> II bež+bež ivory+ivory
				<input checked="" type="checkbox"/> RR crvena+crvena red+red
				<input checked="" type="checkbox"/> GG zelena+zelena green+green
				<input checked="" type="checkbox"/> OO narančasta+narančasta orange+orange



**UTIČNICA ŠUKO+KS 2P+E 16A 250V~ 2M**

- VM10PW
- VM10SB
- VM10ES
- VM10IW

- 2P+E šuko  
- 16A 250V~, tip VM10  
- sukladno normama IEC 60884-1, CEE7  
- vijčano pricvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- KS zaštita za djecu od dodira kontakta

**SOCKET SCHUKO+KS 2P+E 16A 250V~ 2M**

- 2P+E schuko  
- 16A 250V~, type VM10  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- KS build-in child protection - shuttered live contacts

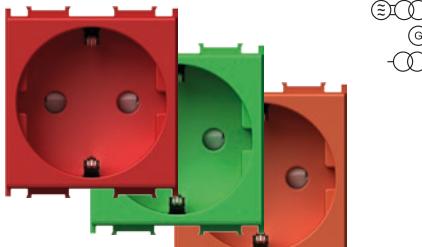**UTIČNICA ŠUKO+KS 2P+E 16A 250V~ 2M**

- VM10RD
- VM10GR
- VM10OR

- 2P+E šuko  
- 16A 250V~, tip VM10  
- sukladno normama IEC 60884-1, CEE7  
- vijčano pricvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- KS zaštita za djecu od dodira kontakta

**SOCKET SCHUKO+KS 2P+E 16A 250V~ 2M**

- 2P+E schuko  
- 16A 250V~, type VM10  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- KS build-in child protection - shuttered live contacts

**UTIČNICA ŠUKO+KS +POKLOPAC 2P+E 16A 250V~ 2M**


- VM11PT
- VM11BT
- VM11ST
- VM11IT
- VM11PP

- 2P+E šuko + poklopac  
- 16A 250V~, tip VM11  
- sukladno normama IEC 60884-1, CEE7  
- vijčano pricvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- KS zaštita za djecu od dodira kontakta

**SOCKET SCHUKO+KS+COVER**

- 2P+E schuko+cover  
- 16A 250V~, type VM11  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- KS build-in child protection - shuttered live contacts



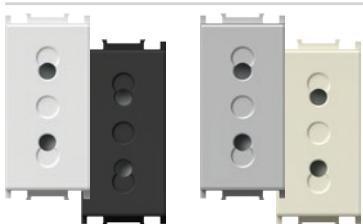

- VM20PW
- VM20SB
- VM20ES
- VM20IW

#### UTIČNICA EURO+KS 2P 10A 250V~ 1M


- 2P Euro
  - 10A 250V~, tip VM20
  - sukladno normama IEC 60884-1, CEE7
  - vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - KS zaštita za djecu od dodira kontakt-a
- SOCKET EURO+KS 2P 10A 250V~ 1M**
- 2P Euro
  - 10A 250V~, type VM20
  - in accordance with IEC 60884-1, CEE7
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts



- VM40PW
- VM40SB
- VM40ES
- VM40IW

#### UTIČNICA FRANCUSKA+KS 2P+E 16A 250V~ 2M

- 2P+E francuska
  - 16A 250V~, tip VM40
  - sukladno normama IEC 60884-1, NF C 61-314 CEE7
  - vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - KS zaštita za djecu od dodira kontakt-a
- SOCKET FRENCH+KS 2P+E 16A 250V~ 2M**
- 2P+E French
  - 16A 250V~, type VM40
  - in accordance with IEC 60884-1, NF C 61-314, CEE7
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts



- VM40RD
- VM40GR
- VM40OR

#### UTIČNICA FRANCUSKA+KS 2P+E 16A 250V~ 2M

- 2P+E francuska
- 16A 250V~, tip VM40
- sukladno normama IEC 60884-1, NF C 61-314 CEE7
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakt-a

- SOCKET FRENCH+KS 2P+E 16A 250V~ 2M**
- 2P+E French
  - 16A 250V~, type VM40
  - in accordance with IEC 60884-1, NF C 61-314, CEE7
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts




- VM41PT
- VM41BT
- VM41ST
- VM41IT

#### UTIČNICA FRANCUSKA+KS+POKLOPAC 2P+E 16A 250V~ 2M

- 2P+E francuska+poklopac
- 16A 250V~, tip VM41
- sukladno normama IEC 60884-1, NF C 61-314 CEE7
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakt-a

- SOCKET FRENCH+KS+COVER  
2P+E 16A 250V~ 2M**
- 2P+E French+cover
  - 16A 250V~, type VM41
  - in accordance with IEC 60884-1, NF C 61-314, CEE7
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts

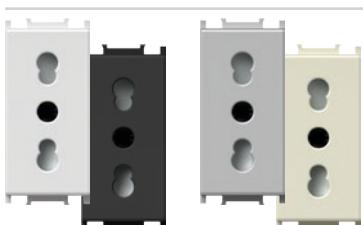


- VM30PW
- VM30SB
- VM30ES
- VM30IW

#### UTIČNICA TALIJANSKA P17/11+KS 2P+E 16A 250V~ 1M

- 2P+E talijanska P17/11
- 16A 250V~, tip VM30
- sukladno normama IEC 60884-1, CEI 23-50
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakt-a

- SOCKET ITALIAN P17/11+KS 2P+E 16A 250V~ 1M**
- 2P+E Italian P17/11
  - 16A 250V~, type VM30
  - in accordance with IEC 60884-1, CEI 23-50
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts

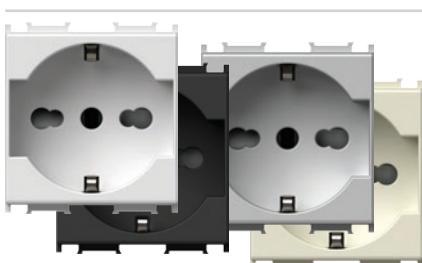


- VM31PW
- VM31SB
- VM31ES
- VM31IW

#### UTIČNICA ŠUKO TALIJANSKA P17/11+KS 2P+E 16A 250V~ 2M

- 2P+E šuko/talijanska P17/11
- 16A 250V~, tip VM31
- sukladno normama IEC 60884-1,CEI 23-50
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakt-a

- SOCKET SCHUKO/ITA P17/11+KS  
2P+E 16A 250V~ 2M**
- 2P+E schuko/Italian P17/11
  - 16A 250V~, type VM31
  - in accordance with IEC 60884-1, CEI 23-50
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts



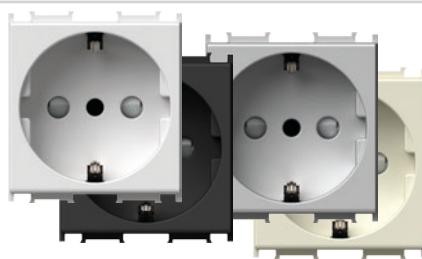

VM32PW  
 VM32SB  
 VM32ES  
 VM32IW

#### UTIČNICA ŠUKO/TALIJANSKA P30+KS 2P+E 16A 250V~ 2M

- 2P+E šuko/talijanska P30
- 16A 250V~, tip VM32
- sukladno normama IEC 60884-1, CEI 23-50
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakta

##### SOCKET SCHUKO/ITA P30+KS

- 2P+E 16A 250V~ 2M
- 2P+E schuko/Italian P30
  - 16A 250V~, type VM32
  - in accordance with IEC 60884-1, CEI 23-50
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts



VM33PW  
 VM33SB  
 VM33ES  
 VM33IW

#### UTIČNICA TALIJANSKA P11+KS 2P+E 10A 250V~ 1M

- 2P+E talijanska P11
- 10A 250V~, tip VM33
- sukladno normama IEC 60884-1, CEI 23-50
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakta

##### SOCKET ITALIAN P11+KS 2P+E 10A 250V~ 1M

- 2P+E Italian P11
- 10A 250V~, type VM33
- in accordance with IEC 60884-1, CEI 23-50
- screw contacts 1.5-2.5 mm<sup>2</sup>
- KS build-in child protection – shuttered live contacts




VM21PW  
 VM21SB  
 VM21ES  
 VM21IW

#### UTIČNICA EURO/AMERIČKA+KS 2P 16A 250V~ 1M

- 2P euro/američka
- 16A 250V~, tip VM21
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakta
- samo za zemlje koje nisu članice EU-a

##### SOCKET EURO/AMERICAN+KS 2P 16A 250V~ 1M

- 2P Euro/American
- 16A 250V~, type VM21
- screw contacts 1.5-2.5 mm<sup>2</sup>
- KS build-in child protection - shuttered live contacts
- only for countries not members of EU

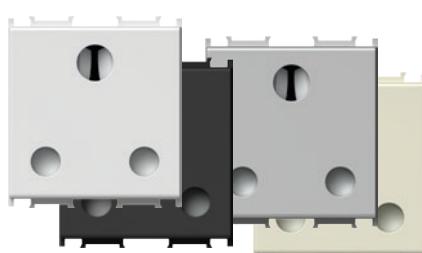


VM51PW  
 VM51SB  
 VM51ES  
 VM51IW

#### UTIČNICA BRITANSKA BS 546+KS 2P+E 15A 250V~ 2M

- 2P+E britanska BS 546
- 15A 250V~, tip VM51
- sukladno normi BS 546
- viđano pričvršćivanje vodiča presjeka 1,5-4 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakta

##### SOCKET BRITISH BS 546+KS 2P+E 15A 250V~ 2M

- 2P+E British BS 546
- 15A 250V~, type VM51
- in accordance with BS 546
- screw contacts 1.5-4 mm<sup>2</sup>
- KS build-in child protection - shuttered live contacts

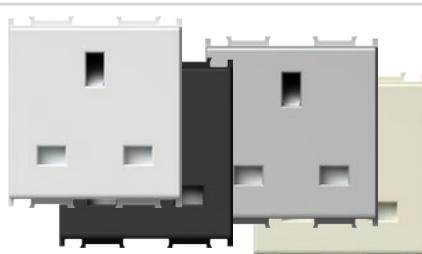

VM52PW  
 VM52SB  
 VM52ES  
 VM52IW

#### UTIČNICA BRITANSKA BS 1363-2+KS 2P+E 13A 250V~ 2M

- 2P+E britanska BS 1363-2
- 13A 250V~, tip VM52
- sukladno normi BS 1363-2
- viđano pričvršćivanje vodiča presjeka 1,5-4 mm<sup>2</sup>
- KS zaštita za djecu od dodira kontakta

##### SOCKET BRITISH BS 1363-2+KS 2P+E 13A 250V~ 2M

- 2P+E British BS 1363-2
- 13A 250V~, type VM52
- in accordance with BS 1363-2
- screw contacts 1.5-4 mm<sup>2</sup>
- KS build-in child protection - shuttered live contacts




VM80

- PRENAPONSKA ZAŠTITA MPE MINI 275V/50Hz
- paralelni spoj s prvom utičnicom u nizu
  - razred zaštite III
  - $U_c = 275\text{Vac}$ ,  $U_{oc}/I_{sc} = 6\text{kV}/3\text{kA}$ ,  $Up < 800\text{V}$
  - sukladno normi IEC 61643-1
  - vodiči presjeka 1,5 mm<sup>2</sup>, IP20
  - zvučni signal u slučaju probroja

##### SURGE PROTECTOR MPE MINI 275V/50Hz

- parallel connection with the first socket in the row
- protection class III
- $U_c = 275\text{Vac}$ ,  $U_{oc}/I_{sc} = 6\text{kV}/3\text{kA}$ ,  $Up < 800\text{V}$
- in accordance with IEC 61643-1
- wires 1.5mm<sup>2</sup>, IP20
- sound signal at breakdown



## S O C K E T S V M

## POVEZIVANJE UTIČNICA I UTIKAČA

SOCKETS AND PLUGS MATCHING


UTIČNICA / SOCKET	VM10 VM11	VM20	VM30	VM33	VM31	VM32	VM40 VM41	VM21
Njemački / German	•				•	•		
Francuski / French	•				•	•	•	
Talijanski / Italian S11			•	•	•	•		
Talijanski / Italian S17			•		•			
euro	•	•	•	•	•	•	•	•

## POVEZIVANJE UTIČNICA I UTIKAČA

SOCKETS AND PLUGS MATCHING

UTIČNICA / SOCKET	VM21	VM51	VM52
Američki / American	•		
Britanski / British		•	
BS 546			•
Britanski / British			
BS 1363-2			


1M = 22,5 x 45  
 2M = 45 x 45

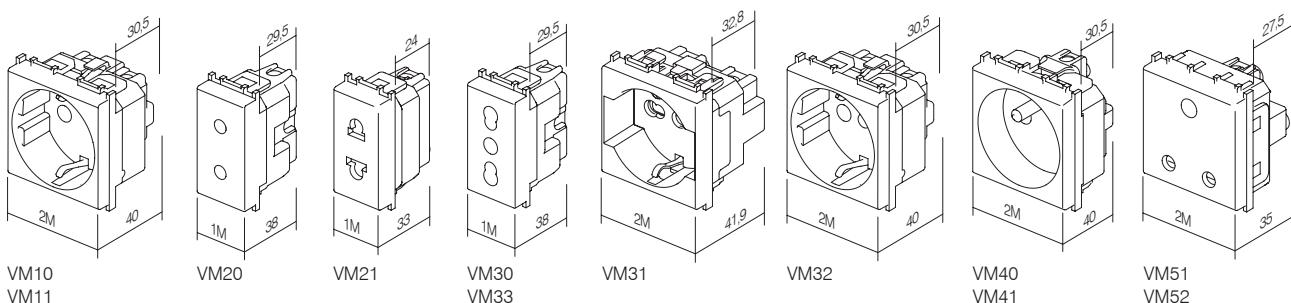



tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
KM10	UTIČNICA TV OSNOVNA SOCKET TV BASIC	0dB	1M	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
KM11	UTIČNICA TV ZAVRŠNA SOCKET TV END-LINE	1dB	1M	<input checked="" type="checkbox"/> SB crna mat <i>soft touch black</i>
KM12	UTIČNICA TV PROLAZNA SOCKET TV TROUHPASS	10dB	1M	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	.	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
.	.	.	.	


#### UTIČNICA TV OSNOVNA 0dB 1M

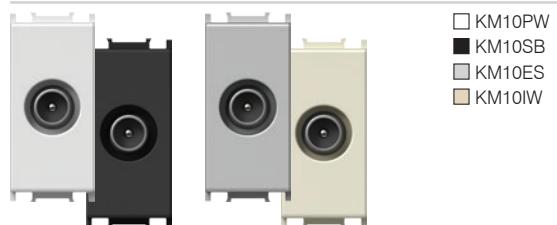

- TV osnovna
  - prigušenje 0dB
  - stražnji konektor – F standard
- SOCKET TV BASIC 0dB 1M**
- TV basic
  - reduction 0dB
  - back connector – F standard




#### UTIČNICA TV OSNOVNA 0dB 2M

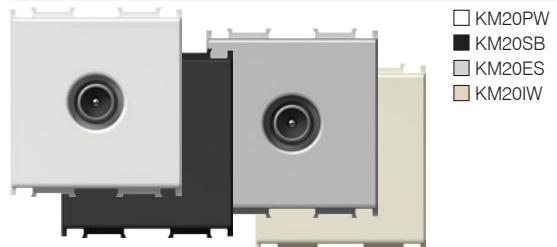

- TV osnovna
  - prigušenje 0dB
  - stražnji konektor – F standard
- SOCKET TV BASIC 0dB 2M**
- TV basic
  - reduction 0dB
  - back connector – F standard




#### UTIČNICA TV ZAVRŠNA 1dB 1M

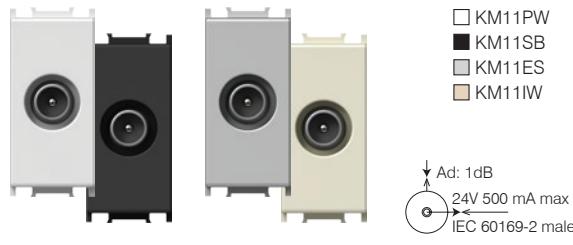

- TV završna
  - propušta frekvenciju u rasponu 5÷2400 MHz
  - prigušenje < 1 dB
  - sukladno normi EN 50083-1
  - vičano pričvršćivanje vodiča
- SOCKET TV END-LINE 1dB 1M**
- TV end-line
  - frequency range 5÷2400 MHz
  - reduction < 1 dB
  - in accordance with EN 50083-1
  - screw contacts



#### UTIČNICA TV PROLAZNA 10dB 1M

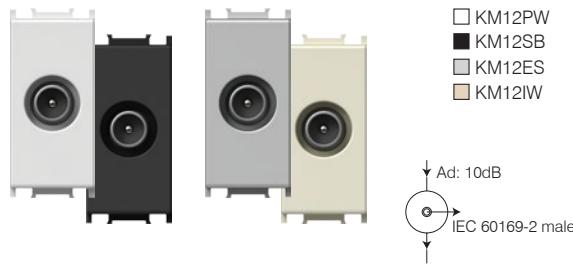

- TV prolazna
  - propušta frekvenciju u rasponu 5÷2400 MHz
  - prigušenje < 10 dB
  - sukladno normi EN 50083-1
  - vičano pričvršćivanje vodiča
- SOCKET TV TROUHPASS 10dB 1M**
- TV troughpass
  - frequency range 5÷2400 MHz
  - reduction < 10 dB
  - in accordance with EN 50083-1
  - screw contacts






- KM15PW
- KM15SB
- KM15ES
- KM15IW

#### UTIČNICA SAT OSNOVNA 0dB 1M

- SAT osnovna
- pribušenje 0dB
- stražnji konektor – F standard
- SOCKET SAT BASIC 0dB 1M**
- SAT basic
- reduction 0dB
- back connector – F standard

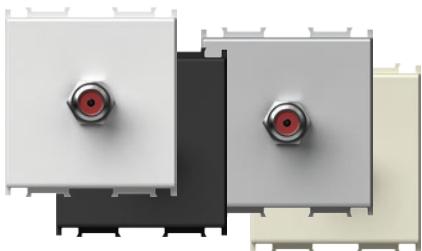

- KM24PW
- KM24SB
- KM24ES
- KM24IW

#### UTIČNICA SAT OSNOVNA 0dB 2M

- SAT osnovna
- pribušenje 0dB
- stražnji konektor – F standard
- SOCKET SAT BASIC 0dB 2M**
- SAT basic
- reduction 0dB
- back connector – F standard



- KM16PW
  - KM16SB
  - KM16ES
  - KM16IW
- Ad: 1dB  
24V 500 mA max  
IEC 60169-2 male

#### UTIČNICA SAT ZAVRŠNA 1dB 1M


- SAT završna
- propušta frekvenciju u rasponu 5÷2400 MHz
- pribušenje < 1dB
- sukladno normi EN 50083-1
- vijčano pričvršćivanje vodiča
- SOCKET SAT END-LINE 1dB 1M**
- SAT end-line
- frequency range 5÷2400 MHz
- reduction < 1dB
- in accordance with EN 50083-1
- screw contacts



- KM19PW
- KM19SB
- KM19ES
- KM19IW

#### UTIČNICA R OSNOVNA 0dB 1M


- R OSNOVNA
- pribušenje 0dB
- stražnji konektor – F standard
- SOCKET R BASIC 0dB 1M**
- R basic
- reduction 0dB
- back connector – F standard

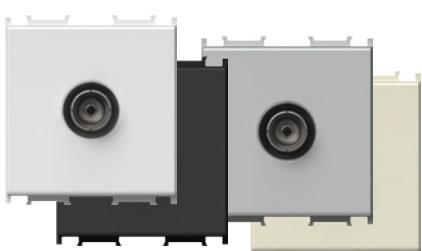

- KM29PW
- KM29SB
- KM29ES
- KM29IW

#### UTIČNICA R OSNOVNA 0dB 2M


- R osnovna
- pribušenje 0dB
- stražnji konektor – F standard
- SOCKET R BASIC 0dB 2M**
- R basic
- reduction 0dB
- back connector – F standard

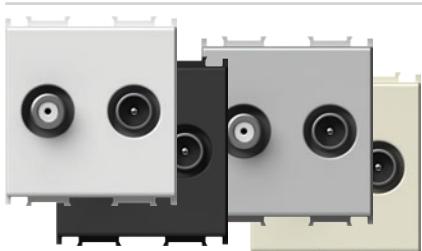

- KM25PW
- KM25SB
- KM25ES
- KM25IW

#### UTIČNICA SAT ZAVRŠNA 1db 2M


- SAT-TV završna
- propušta frekvenciju u rasponu 5÷2400 MHz
- pribušenje < 1dB
- sukladno normi EN 50083-1
- vijčano pričvršćivanje vodiča
- SOCKET SAT-TV END-LINE 1dB 2M**
- SAT-TV end-line
- frequency range 5÷2400 MHz
- reduction < 1dB
- in accordance with EN 50083-1
- screw contacts



## PRIMJERI OSNOVNOG SPOJA


## BASIC CONNECTION SAMPLES

pojedinačni spoj  
stand alone connection




KM10  
KM20  
KM11  
KM15  
KM24  
KM16  
KM19  
KM29  
KM25

zvjezdasti spoj  
star connection



KM10  
KM20  
KM11  
KM15  
KM24  
KM16  
KM19  
KM29  
KM25

prolazni spoj  
throughpass connection



KM12      KM11

## UTIČNICA AUDIO 2xRCA 1M

- KM22PW
  - KM22SB
  - KM22ES
  - KM22IW
- SOCKET AUDIO 2xRCA 1M**
- audio 2x RCA
  - lemljenje spojeva kabela na stražnjoj strani
  - audio 2x RCA
  - soldering connection of cable at the back side



## UTIČNICA AUDIO ZVUČNICI 1M

- KM23PW
  - KM23SB
  - KM23ES
  - KM23IW
- SOCKET AUDIO LOUDSPEAKERS 1M**
- audio 2x Ø4 mm
  - pričvršćivanje vodiča za zvučnike umetanjem ili banana utikačem Ø4 mm
  - lemljenje spojeva kabela na stražnjoj strani
  - audio 2x Ø4mm
  - to accommodate speaker wire, banana plug Ø4mm or spades
  - soldering connection of cable at the back side




## UTIČNICA AUDIO ZVUČNICI 2M

- KM26PW
  - KM26SB
  - KM26ES
  - KM26IW
- SOCKET AUDIO LOUDSPEAKERS 2M**
- audio 2x Ø4 mm
  - pričvršćivanje vodiča za zvučnike umetanjem ili banana utikačem Ø4 mm
  - lemljenje spojeva kabela na stražnjoj strani
  - audio 2x Ø4mm
  - to accommodate speaker wire, banana plug Ø4mm or spades
  - soldering connection of cable at the back side




1M = 22,5 x 45  
2M = 45 x 45




KM10


KM11  
KM12




KM15




KM19




KM22  
KM23



KM20  
KM24  
KM29



KM26

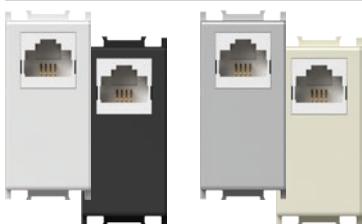
**UTIČNICA TEL LT RJ11 6/4 1M**

- KM30PW
- KM30SB
- KM30ES
- KM30IW

- TEL LT vijak  
- RJ11 6/4  
- sukladno normi IEC 60603-7  
- vijčano pričvršćivanje

**SOCKET TEL LT RJ11 6/4 1M**

- TEL LT screw
- RJ11 6/4
- in accordance with IEC 60603-7
- screw contacts

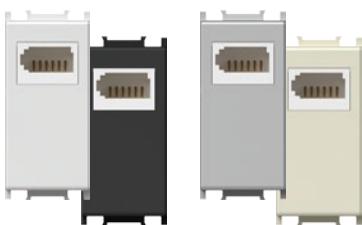
**UTIČNICA TEL BT SEC 6/6 1M**

- KM31PW
- KM31SB
- KM31ES
- KM31IW

- TEL BT britanski standard  
- SEC sekundarna 6/6  
- sukladno normi BS 6312  
- vijčano pričvršćivanje

**SOCKET TEL BT SEC 6/6 1M**

- TEL BT British standard
- SEC secondary 6/6
- in accordance with BS 6312
- screw contacts

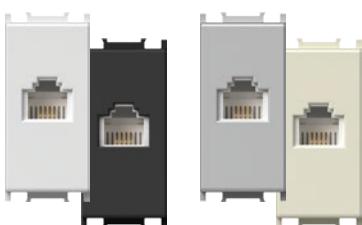
**UTIČNICA TEL KS RJ11 6/4 1M**

- KM36PW
- KM36SB
- KM36ES
- KM36IW

- KS keystone standard pričvršćivanja  
- RJ11 6/4  
- sukladno normi IEC 60603-7

**SOCKET TEL KS RJ11 6/4 1M**

- KS keystone fixing standard
- RJ11 6/4
- in accordance with IEC 60603-7

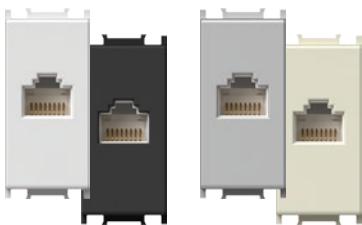
**UTIČNICA CAT5e KS RJ45 8/8 1M**

- KM37PW
- KM37SB
- KM37ES
- KM37IW

- KS keystone standard pričvršćivanja  
- CAT5e, RJ45 8/8  
- sukladno normi IEC 60603-7

**SOCKET CAT5e KS RJ45 8/8 1M**

- KS keystone fixing standard
- CAT5e, RJ45 8/8
- in accordance with IEC 60603-7

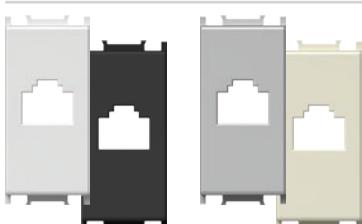
**ADAPTER KS 1M**

- KM35PW
- KM35SB
- KM35ES
- KM35IW

- KS keystone standard pričvršćivanja  
- AMP, Ávaya, Brandrex, FMT, Mfico, Tyco, ...  
- nije ugrađen komunikacijski modul

**ADAPTER KS 1M**

- KS keystone fixing standard
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- communication module not included

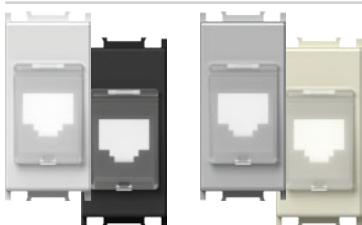**ADAPTER KS SA ZAŠTITOM OD PRAŠINE 1M**


- KM38PW
- KM38SB
- KM38ES
- KM38IW

- KS keystone standard pričvršćivanja sa zaštitom od prašine  
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...  
- nije ugrađen komunikacijski modul

**ADAPTER KS WITH DUST PROTECTION 1M**

- KS keystone fixing standard with dust protection
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- communication module not included



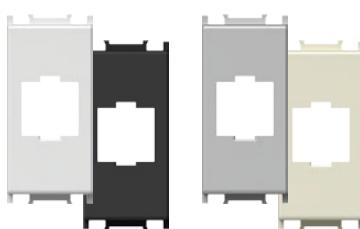


- KM50PW
- KM50SB
- KM50ES
- KM50IW

#### ADAPTER KS UNIVERZALNI 1M

- KS keystone standard pričvršćivanja
- prikladan za HDMI, USB
- nije ugrađen komunikacijski modul

#### ADAPTER KS UNIVERSAL 1M

- KS keystone fixing standard
- suitable for HDMI, USB
- communication module not included

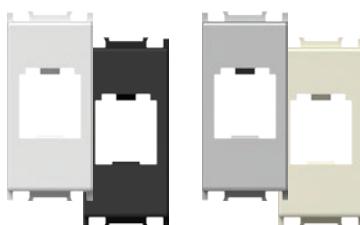


- KM40PW
- KM40SB
- KM40ES
- KM40IW

#### ADAPTER PD 1M

- PD Panduit Mini-COM standard pričvršćivanja
- nije ugrađen komunikacijski modul

#### ADAPTER PD 1M

- PD Panduit Mini-COM fixing standard
- communication module not included

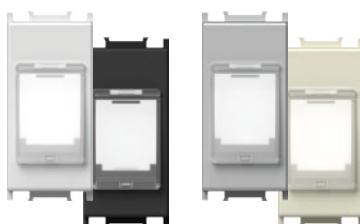


- KM43PW
- KM43SB
- KM43ES
- KM43IW

#### ADAPTER PD SA ZAŠТИТОM OD PRAŠINE 1M

- PD Panduit Mini-COM standard pričvršćivanja sa zaštitom od prašine
- nije ugrađen komunikacijski modul

#### ADAPTER PD WITH DUST PROTECTION 1M

- PD Panduit Mini-COM fixing standard with dust protection
- communication module not included

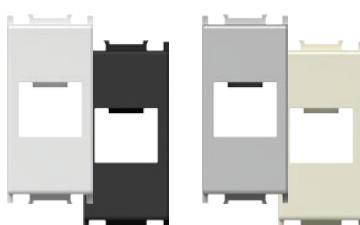

- KM46PW
- KM46SB
- KM46ES
- KM46IW

#### ADAPTER R&M 1M

- R&M standard pričvršćivanja
- nije ugrađen komunikacijski modul

#### ADAPTER R&M 1M

- R&M fixing standard
- communication module not included




- KM47PW
- KM47SB
- KM47ES
- KM47IW

#### ADAPTER R&M SA ZAŠТИТОM OD PRAŠINE 1M

- R&M standard pričvršćivanja sa zaštitom protiv prašine
- nije ugrađen komunikacijski modul

#### ADAPTER R&M WITH DUST PROTECTION 1M

- R&M fixing standard with dust protection
- communication module not included

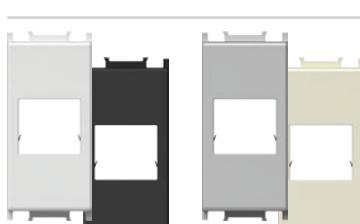

- KM45PW
- KM45SB
- KM45ES
- KM45IW

#### ADAPTER LK 1M

- LK LeoniKerpen eLine / BKS NewLine standard pričvršćivanja
- nije uključen komunikacijski modul

#### ADAPTER LK 1M

- LK LeoniKerpen eLine / BKS NewLine fixing standard
- communication module not included






KA26

**ADAPTER NEXANS/SCHRACK 2M**

- pričvršćivanje adaptora za Nexans LANmark i modul Schrack 45x45mm
- prikladno za tip Nexan N423.540N
- prikladno za tip Schrack HSEMD02W2F
- nije ugrađen komunikacijski modul

**ADAPTER NEXANS/SCHRACK 2M**

- fixing adapter for Nexans LANmark and Schrack module 45x45mm
- suitable for Nexans type N423.540N
- suitable for Schrack type HSEMD02W2F
- communication module not included

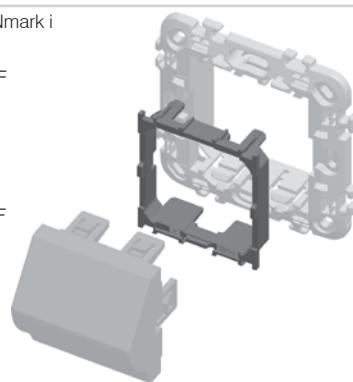

- KM48PW
- KM48SB
- KM48ES
- KM48IW

- AT&T Systimax standard pričvršćivanja sa zaštitom od prašine
- nije ugrađen komunikacijski modul

**ADAPTER AT&T SYSTIMAX WITH DUST PROTECTION 1M**

- AT&T Systimax fixing standard with dust protection
- communication module not included



- KM51PW
- KM51SB
- KM51ES
- KM51IW

**UTIČNICA USB TIP A 1M**


- USB 2.0 utičnica tip A
- vijčano pričvršćivanje, raster 5 mm, 1,5 mm<sup>2</sup>, 1x2P + 1x3P
- spajanje:
- PIN 1 – VCC (+5V, crvena žica)
- PIN 2 – Data - (bijela žica)
- PIN 3 – Data + (zeleni žica)
- PIN 4 – GND - uzemljenje (crna žica)
- S – zaštita
- sukladno direktivi 2011/95/EU (RoHS2)

**SOCKET USB TYPE A 1M**


- USB 2.0 socket type A
- screw contacts, raster 5 mm, 1,5 mm<sup>2</sup>, 1x2P + 1x3P
- wiring:
- PIN 1 – VCC (+5V, red wire)
- PIN 2 – Data - (white wire)
- PIN 3 – Data + (green wire)
- PIN 4 – GND - ground (black wire)
- S – shield
- in accordance with directive 2011/95/EU (RoHS2)







1M = 22,5 x 45  
2M = 45 x 45





KM30



KM31

KM35  
KM38  
KM48KM36  
KM37KM40  
KM43

KM45

KM46  
KM47  
KM50

KM51



KA10

tip type	naziv description	tehnički podaci technical data
KA10	KONEKTOR KS CAT3 CONNECTOR KS CAT3	RJ11 6/4
KA11	KONEKTOR KS CAT5e CONNECTOR KS CAT5e	RJ45 8/8
KA12	KONEKTOR KS CAT5eS CONNECTOR KS CAT5eS	RJ45 8/8

## KONEKTOR KS CAT3 RJ11 6/4



KA10

- KS keystone standard pričvršćivanja  
- CAT3, RJ11 6/4  
- sukladno normi IEC 60603-7  
**CONNECTOR KS CAT3 RJ11 6/4**  
- KS keystone fixing standard  
- CAT3, RJ11 6/4  
- in accordance with IEC 60603-7

## KONEKTOR KS CAT5e RJ45 8/8



KA11

- KS keystone standard pričvršćivanja  
- CAT5e, RJ45 8/8  
- sukladno normi IEC 60603-7  
**CONNECTOR KS CAT5e RJ45 8/8**  
- KS keystone fixing standard  
- CAT5e, RJ45 8/8  
- in accordance with IEC 60603-7

## KONEKTOR KS CAT5eS RJ45 8/8



KA12

- KS keystone standard pričvršćivanja  
- CAT5eS, RJ45 8/8  
- sukladno normi IEC 60603-7  
**CONNECTOR KS CAT5eS RJ45 8/8**  
- KS keystone fixing standard  
- CAT5eS, RJ45 8/8  
- in accordance with IEC 60603-7

## KONEKTOR KS CAT6 SCH RJ45 8/8



KA15

- KS keystone standard pričvršćivanja  
- CAT6, RJ45 8/8  
- sukladno normi ISO/IEC 11801  
**CONNECTOR KS CAT6 SCH RJ45 8/8**  
- KS keystone fixing standard  
- CAT6 UTP toolless, RJ45 8/8  
- in accordance with ISO/IEC 11801

## KONEKTOR KS CAT6S SCH RJ45 8/8



KA16

- KS keystone standard pričvršćivanja  
- CAT6S STP bezalatna montaža, RJ45 8/8  
- sukladno normi ISO/IEC 11801  
**CONNECTOR KS CAT6S SCH RJ45 8/8**  
- KS keystone fixing standard  
- CAT6S STP toolless, RJ45 8/8  
- in accordance with ISO/IEC 11801

## KONEKTOR KS CAT6S SCH RJ45 8/8



KA17

- KS keystone standard pričvršćivanja  
- CAT6a STP bezalatna montaža, RJ45 8/8  
- sukladno normi ISO/IEC 11801  
**CONNECTOR KS CAT6S SCH RJ45 8/8**  
- KS keystone fixing standard  
- CAT6a STP toolless, RJ45 8/8  
- in accordance with ISO/IEC 11801



KA27

## KONEKTOR KS HDMI

- KS keystone standard pričvršćivanja
- samo u kombinaciji s adapterom KM50
- HDMI/HDMI

## CONNECTOR KS HDMI

- KS keystone fixing standard
- only in combination with adapter KM50
- HDMI/HDMI



EM31




PW



tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
EM10	REGULATOR OSVJETLJENJA ROTACIJSKI <i>DIMMER ROTATIVE</i>	R 300W	1M	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
EM11	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI <i>DIMMER ROTATIVE 2WAY</i>	RL 300W	1M	<input checked="" type="checkbox"/> SB crna mat <i>soft touch black</i>
EM21	REGULATOR OSVJETLJENJA UGRADNI <i>DIMMER INBOX</i>	RLC 300W	/	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	.	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
.	.	.	.	<input type="checkbox"/> BL plava <i>blue</i>
.	.	.	.	<input type="checkbox"/> RD crvena <i>red</i>
.	.	.	.	<input type="checkbox"/> GR zelena <i>green</i>
.	.	.	.	<input type="checkbox"/> OR narančasta <i>orange</i>
.	.	.	.	<input type="checkbox"/> RG crveno-zelena <i>red/green</i>

## REGULATOR OSVJETLJENJA ROTACIJSKI R 300W 1M

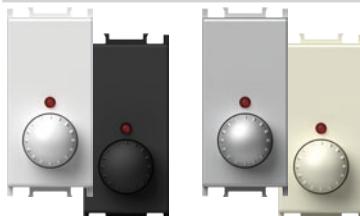

- EM10PW
- EM10SB
- EM10ES
- EM10IW

- rotacijski bez sklopke  
 - tip RTS34, 43, RVP, opterećenje R, 40W – 300W  
 - mrežni napon 230V~ 50Hz  
 - nije moguća kombinacija s izmjeničnom sklopkom  
 - povezivanje više regulatora osvjetljenja nije dopušteno  
 - sukladno normi EN 60669-1  
 - viđano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - LED indikacija



## DIMMER ROTATIVE R 300W 1M

- rotation control without switch  
 - type RTS34.43 RVP, load R, 40W - 300W  
 - supply voltage 230V~ 50Hz  
 - 2-way switch combination is not possible  
 - more dimmers combination is not allowed  
 - in accordance with EN 60669-1  
 - screw contacts 1.5-2.5mm<sup>2</sup>  
 - LED indication



- EM11PW
- EM11SB
- EM11ES
- EM11IW

- rotacijski s izmjeničnom sklopkom  
 - tip RTS34 DVP, opterećenje RL, 40W – 300W  
 - mrežni napon 230V~ 50Hz  
 - moguća je kombinacija s izmjeničnom sklopkom  
 - povezivanje više regulatora osvjetljenja nije dopušteno  
 - memoriranje jačine osvjetljenja  
 - sukladno normi EN 60669-1  
 - viđano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - LED indikacija



## DIMMER ROTATIVE 2WAY RL 300W 1M

- rotation control with 2-way switch  
 - type RTS34 DVP, load RL, 40W - 300W  
 - supply voltage 230V~ 50Hz  
 - 2-way switch combination is possible  
 - more dimmers combination is not allowed  
 - light intensity memory  
 - in accordance with EN 60669-1  
 - screw contacts 1.5-2.5mm<sup>2</sup>  
 - LED indication



EM21

## REGULATOR OSVJETLJENJA UGRADNI RLC 300W

- ugradni, kontrola preko vanjskog tipkala
- tip RHUN, opterećenje RLC, 25W - 300W ili 25VA - 250VA
- mrežni napon 230V~ 50Hz
- moguće je nekoliko kombinacija tipkala
- povezivanje više regulatora osvjetljenja nije dopušteno
- memoriranje jačine osvjetljenja
- funkcija usporeni start / stop
- sukladno normi EN 61058-1
- vodiči presjekat 1,5 mm<sup>2</sup>



## DIMMER INBOX RLC 300W

- inbox, controlled by external push button
- type RHUN, load RLC, 25W - 300W or 25VA - 250VA
- supply voltage 230V~ 50Hz
- several push-buttons combination is possible
- more dimmers combination is not allowed
- light intensity memory
- soft start / stop function
- in accordance with EN 61058-1
- wires 1.5mm<sup>2</sup>



EM22

## REGULATOR OSVJETLJENJA UGRADNI R 500W

- ugradni, kontrola preko vanjskog tipkala
- tip RTL500UN, opterećenje R, 40W - 500W
- mrežni napon 230V~ 50Hz
- moguće je nekoliko kombinacija tipkala
- povezivanje više regulatora osvjetljenja nije dopušteno
- memoriranje jačine osvjetljenja
- funkcija usporeni start / stop
- sukladno normi EN 61058-1
- vičano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>



## DIMMER INBOX R 500W


- inbox, controlled by external push button
- type RTL500UN, load R, 40W - 500W
- supply voltage 230V~ 50Hz
- several push-buttons combination is possible
- more dimmers combination is not allowed
- light intensity memory
- soft start / stop function
- in accordance with EN 61058-1
- screw contacts 1.5-2.5mm<sup>2</sup>

EM10 (40÷300W)









EM22 (40÷500W)



EM11 (40÷300W)



EM21 (25÷300W, 25÷250VA)

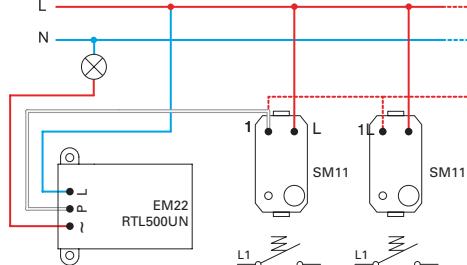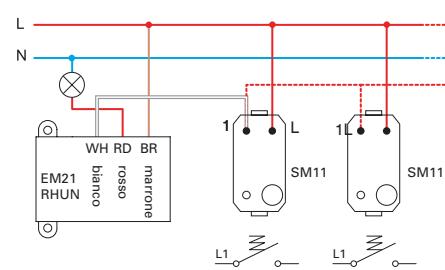
1 - žarulja sa žarnom nit /  
incandescent lamp2 - halogena žarulja /  
halogen lamp3 - klasični transformator /  
classical transformer4 - elektronički transformator /  
electronic transformer


POZOR!

Ako se više regulatora osvjetljenja priključi u jednu kutiju, za svaki se dodatni regulator smanjuje maksimalna ukupna snaga za 10%.

ATTENTION!

If more dimmers are connected in one box reduce maximum common power for 10% for each dimmer.

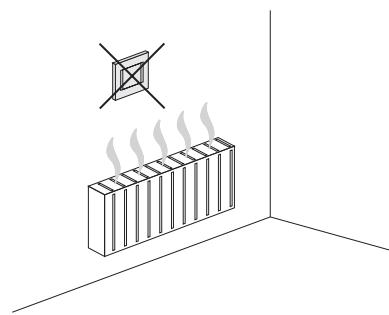

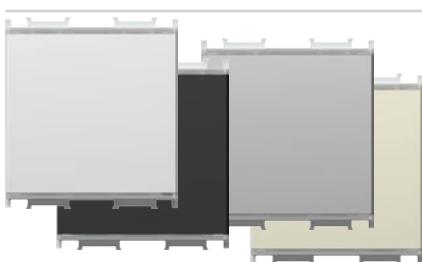

□ EM25PW  
■ EM25SB  
□ EM25ES  
■ EM25IW

### SKLOPKA / REGULATOR OSVJETLJENJA UNIVERZALNI RLC 0-300W 2M

- univerzalni elektronički regulator osvjetljenja za uključivanje i isključivanje i regulaciju osvjetljenja svih zatamnjivih žarulja (klasična, halogena, LED, CFL, ...) i nekih vrsta nezatamnjivih
- automatska detekcija tipa tinjalice i prilagodba režima rada
- smanjenje potrošnje energije
- funkcija usporenog starta produljuje vijek trajanja tinjalice
- kontrola preko ugrađene mikrosklopke
- ugrađena funkcija memorije – pri gašenju memorira stupanj svjetlosti
- može se povezati do pet (5) dodatnih kontrolnih jedinica EM26
- nije moguće kombiniranje s izmjeničnom sklopkom
- ugrađena zaštita od kratkog spoja, pregrijavanja i preopterećenja
- mrežni napon 230V~ 50Hz
- elegantno LED osvjetljenje, prilagodljiva boja i stupanj osvjetljenja
- moguća zamjena klasične sklopke u dvožičnom spoju<sup>(1)</sup>
- potpuna funkcionalnost postiže se u trožičnom spoju<sup>(2)</sup>
- sukladno normama EN 60669-1 i EN 60669-2-1
- vijčano pričvršćivanje vodiča presjeka 1,5 mm<sup>2</sup> (maks. moment zatezanja 0,4 Nm)




**TOUCH EM25** je mikroprocesorski upravljan zatamnjivač svjetla. Služi kao sklopka te zatamnjivač za zatamnjive i neke vrste nezatamnjivih žarulja. Ugrađeni mikroprocesor automatski prepozna vrstu žarulje i prilagođava način rada. Pamti razinu zatamnjivanja nakon isključivanja, zahvaljujući ugrađenoj memorijskoj funkciji. Funkcija polaganog paljenja produžava vijek trajanja žarulje. U tipku integrirana elegantna LED rasvjeta omogućava razne boje i razine intenziteta. Moguce je spojiti do 5 dodatnih upravljačkih sklopki EM26 („slave“).

**TOUCH EM25** is microprocessor controlled electronic light dimmer. It serves as switch and dimmer for dimmable and some of no-dimmable lamps. Integrated microprocessor automatically identifies the type of lamp and adjusts the operating mode. It remembers the level of dimming after switching off due to integrated memory function. Soft-start function extends the lamp service life. In button integrated elegant LED illumination enables many different colors and intensity levels. Optionally one can connect of up to 5 additional control tasters EM26 („slave“).

### SWITCH / DIMMER UNIVERSAL RLC 0-300W 2M

- universal electronic dimmer for ON/OFF switching and dimming of all dimmable lamps (classical, halogen, LED, CFL, ...) and some no-dimmable lamps
- automatic detection of lamp type and adjustment of operating mode
- reduction of energy consumption
- soft start function extends life of lamps
- controlled by built-in micro switches
- memory function included – memorizes brightness on turn-off
- up to five (5) additional control units EM26 can be connected
- connection with 2-way switch is not possible
- built-in short-circuit, overheating and overload protection
- supply voltage 230V~ 50Hz
- elegant LED illumination, adjustable colour and brightness
- replacement of classical switch is possible at two-wire connection<sup>(1)</sup>
- full functionality is achieved at three-wire connection<sup>(2)</sup>
- in accordance with EN 60669-1 and EN 60669-2-1
- screw contacts 1.5mm<sup>2</sup> (max. tightening torque 0.4Nm)


(1) dvožični spoj  
two-wire connection



- dvožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja

- two-wire connection allows dimming of dimmable lamps

(2) trožični spoj  
three-wire connection



- trožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja te nekih nezatamnjivih LED i CFL lampi

- three-wire connection allows dimming of dimmable lamps and some of no-dimmable LED and CFL lamps

	12		5	6	7
Min. Max.	40 W 300 W	40 W 300 W	40 VA 300 VA	40 VA 100 VA	40 VA 100 VA

1 - žarulja sa žarnom niti /  
incandescent lamp

2 - halogena žarulja /  
halogen lamp

4 - elektronički transformator /  
electronic transformer

5 - klasični transformator /  
classical transformer

	12		4	6	7	8	9
Min. Max.	0 W 300 W	0 W 300 W	0 VA 120 VA				

6 - štedna CFL tinjalica s regulacijom osvjetljenja /  
dimmable energy saving CFL lamp

7 - LED tinjalica s regulacijom osvjetljenja /  
dimmable LED lamp

8 - štedna CFL tinjalica bez regulacije osvjetljenja /  
no-dimmable energy saving CFL lamp

9 - LED tinjalica bez regulacije osvjetljenja /  
no-dimmable LED lamp

napomene /  
remarks

- (F) filter EM27


- preporučujemo korištenje EM27 filtra /  
it is recommended to use filter EM27

- sve spojene žarulje moraju biti jednake /  
all controlled lamps must be the same

- tablica opterećenja vrijedi za žarulje s faktorom PF>0,5 /  
table of loads is valid for lamps with power factor PF>0.5

## E L E C T R O N I C S      E M

paljenje / gašenje te zatamnjivanje žarulje /  
on / off switching and dimming of lamp



paljenje /  
gašenje  
kratki pritisak  
on / off  
short press

odabir boje i podešavanje intenziteta LED osvjetljenja /  
LED colour selection and intensity level adjustment




isključivanje osvjetljenja  
kratki pritisak  
lamp off  
short press


\* funkcija "RESET" /  
"RESET" function




isključivanje osvjetljenja  
kratki pritisak  
lamp off  
short press



osvjetljivanje  
dugi pritisak  
dimming up  
long press



istovremeni pritisak ~3s  
ugrađeno LED svjetlo trepne  
3 puta  
simultaneous press ~3s  
integrated LED blinks 3 times




istovremeni pritisak ~3s  
ugrađeno LED svjetlo trepne  
3 puta  
simultaneous press ~3s  
integrated LED blinks 3 times



zatamnjivanje  
dugi pritisak  
dimming down  
long press



odabir boje  
kratki pritisak  
colour selection  
short press



ponovni istovremeni pritisak ~5s  
ugrađeno LED svjetlo trepne  
5 puta  
re-simultaneous press ~5s  
integrated LED blinks 5 times



ugrađeno LED osvjetljivanje  
dugi pritisak  
integrated LED dimming up  
long press

- \* - preporučuje se za ugradnju zatamnjivača i pri zamjeni žarulje
  - obvezno kod korištenja nezatamnjivih žarulja
  - funkcija "RESET" nije dostupna kod korištenja dvožičanog spajanja
  - moguće samo za EM25
- it is recommended at dimmer installation and lamp replacement
- mandatory when using no-dimmable lamps
- "RESET" function is not possible when using two-wire connection
- only possible on EM25







ugrađeno LED zatamnjivanje  
dugi pritisak  
integrated LED dimming down  
long press



spremanje postavki – istovremeni kratki  
pritisak  
ugrađeno LED svjetlo trepne 3 puta  
settings saving - simultaneous short press  
integrated LED blinks 3 times

upozorenja za ugradnju /  
installation precautions



pri montaži ne pritišćite tipku /  
do not push on button during mounting



- EM26PW
- EM26SB
- EM26ES
- EM26IW

### UPRAVLJAČKA JEDINICA - TIPKALO 2M


- priključena na univerzalni regulator osvjetljenja dopušta upravljanje žaruljama s istom funkcionalnošću kao EM25
- mrežni napon 230V~ 50Hz
- sukladno normama EN 60669-1 i EN 60669-2-1
- viđano pričvršćivanje vodiča presjeka 1,5 mm<sup>2</sup> (maks. moment zatezanja 0,4 Nm)



### PUSH-BUTTON CONTROL UNIT 2M

- connected to universal dimmer EM25 allows controlling of lamps with same functionality as EM25
- supply voltage 230V~ 50Hz
- in accordance with EN 60669-1 and EN 60669-2-1
- screw contacts 1.5mm<sup>2</sup> (max. tightening torque 0.4Nm)


(1) dvožični spoj  
two-wire connection

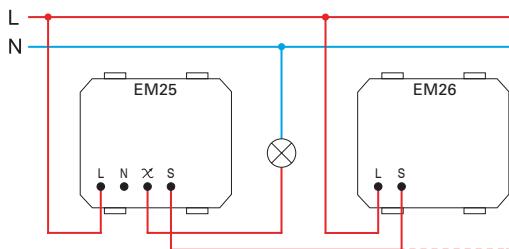

- dvožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja
- kod dvožičnog spajanja korištenje svake dodatne upravljačke jedinice povećava minimalno opterećenje za 25W

- two-wire connection allows dimming of dimmable lamps
- in a two-wire connection each additional control unit increases the minimum load by 25W

(2) trožični spoj  
three-wire connection

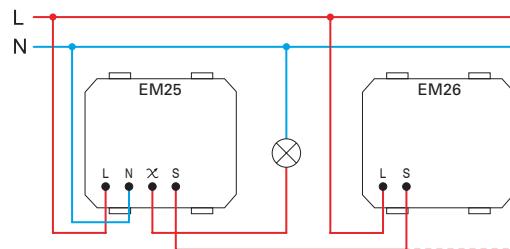

- trožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja te nekih nezatamnjivih LED i CFL lampi


- three-wire connection allows dimming of dimmable lamps and some of non-dimmable LED and CFL lamps



EM27

### FREKVENCIJSKI FILTAR

- filter frekvencijskih smetnji za EM25
- prikaz je simboličan
- FREQUENCY FILTER**
- frequency filter for EM25
- image is symbolic

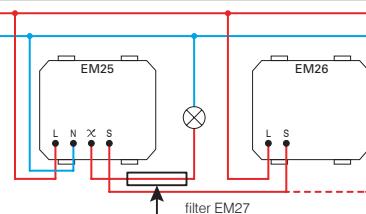

EM25PPOL20

### SET SKLOPKA / REGULATOR OSVJETLJENJA UNIVERZALNI RLC 0-300W 2M PP OL20


- set uključuje regulator osvjetljenja EM25, ugradbeni nosač 2M i okvir LINE 2M PW
- za tehničke detalje pogledajte EM25

### SET SWITCH / DIMMER UNIVERSAL RLC 0-300W 2M PP OL20

- set includes dimmer EM25, mounting frame 2M and cover plate LINE 2M PW
- for technical details see EM25



2M = 45 x 45





- EM31PW
- EM31SB
- EM32ES
- EM31IW

#### IR SKLOPKA 5A 230V~ 1M

- IR infracrvena sklopka
- napajanje: 230V~ ± 10% 50Hz
- relej: 5A / 250V~ izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništicu („zero crossing“)
- zaštitna razina: IP40
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>
- kut prepoznavanja: do 110° pri 20 °C
- raspon prepoznavanja: približno 8m pri 20 °C
- prilagodljivost trajanja: od približno 5 s do 12 min
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX
- temperatura radnog okruženja: od 0 °C do +40 °C
- nije prikladan za ugradnju u kutije duboke 45 mm te podžbukne kutije ĆUBO IP20
- samo za unutrašnju uporabu



#### IR SWITCH 5A 230V~ 1M

- IR infrared switch
- supply voltage: 230V~ ± 10 % 50Hz
- relay: 5A / 250V~ output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes and surface mount box CUBO IP20
- only for indoor usage



- EM32PW
- EM32SB
- EM32ES
- EM32IW

#### IR SKLOPKA 5A 230V~ 2M




- IR infracrvena sklopka
- napajanje: 230V~ ± 10% 50Hz
- relej: 5A / 250V~ izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništicu („zero crossing“)
- zaštitna razina: IP40
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>
- kut prepoznavanja: do 110° pri 20 °C
- raspon prepoznavanja: približno 8m pri 20 °C
- prilagodljivost trajanja: od približno 5 s do 12 min
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX
- temperatura radnog okruženja: od 0 °C do +40 °C
- nije prikladan za ugradnju u kutije duboke 45mm te podžbukne kutije ĆUBO IP20
- samo za unutrašnju uporabu




#### IR SWITCH 5A 230V~ 2M

- IR infrared switch
- supply voltage: 230V~ ± 10 % 50Hz
- relay: 5A / 250V~ output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes and surface mount box CUBO IP20
- only for indoor usage

mogućnost raspoznavanja  
detection range

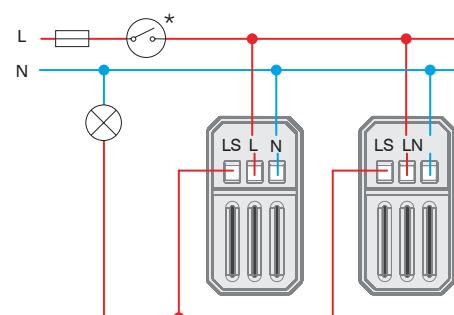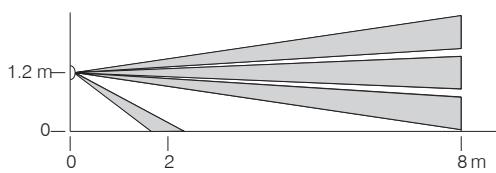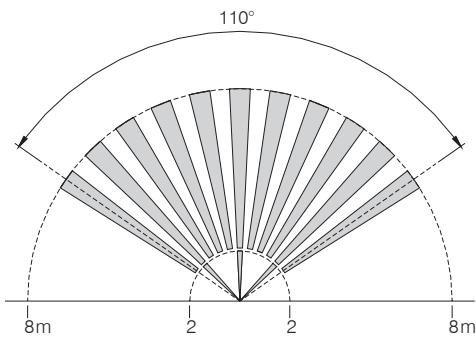

podešavanje vremena i osjetljivosti /  
time and twilight adjustment

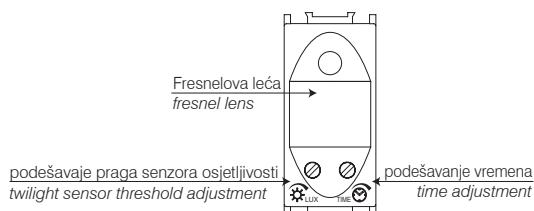

	5 LUX	200 LUX
	~5 s	~12 min

	1	2	3	4	5	6	7	8
Min.	1 W	1 W			1 W	1 W	1 VA	1 VA
Max.	800 W	800 W			6x36 W	4x36 W (20μF)	6x23 VA	6x20 VA

1 - žarulja sa žarnom niti /  
incandescent lamp

2 - halogena žarulja /  
halogen lamp

3 - otporan grijajući element /  
resistive heating element

4 - električni transformator /  
electronic transformer


5 - fluorescentna cijev (izvedba 1) /  
fluorescent tube (version 1)

6 - fluorescentna cijev (izvedba 2) /  
fluorescent tube (version 2)


7 - štedna CFL žarulja /  
energy saving CFL lamp

8 - LED žarulja /  
LED lamp

upozorenja /  
attention

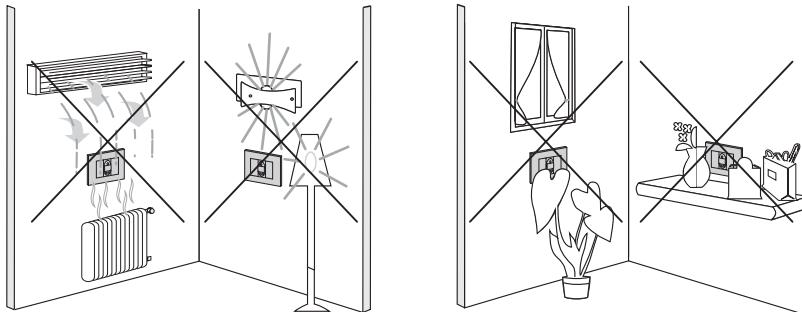

1M = 22,5 x 45

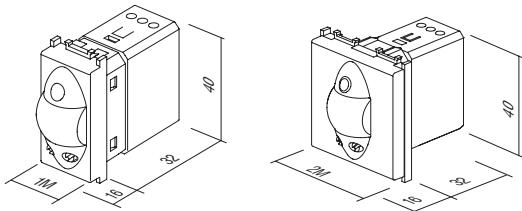





□ EM37PW  
■ EM37SB  
▢ EM37ES  
▨ EM37IW

Termostat je namijenjen reguliranju temperature u prostoru. Termostat omogućava dva načina rada – grijanje ili hlađenje. Ugrađene su i sigurnosne funkcije protiv smrzavanja (način grijanja) te protiv pregrijavanja (način hlađenja). Način rada se označava preko LED osvijetljenja. Postavke termostata unose se pomoću okruglog mehanizma za postavljanje temperature te s drugim kapacitivnim dodirnim tipkama.


The thermostat is intended for regulating temperature in a room. A thermostat enables two modes of operation – heating or cooling. It has safety functions installed for protection against freezing (heating mode) and protection against overheating (cooling mode). The operation is indicated via LED lights. Thermostat setup is performed with the help of a rotary button for setting the temperature and with other capacitive touch buttons.

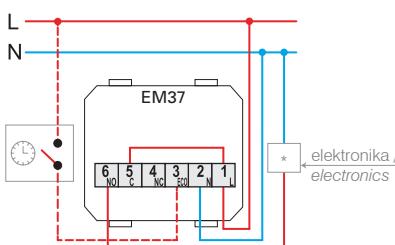

circulacijska crpka, plamenik (direktno spajanje)  
termoelektrični pogon /  
circulation pump, burner (direct connection)  
thermoelectric drive

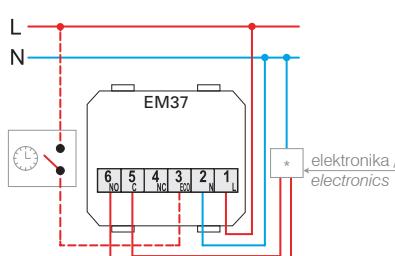


bojler, topilinska crpka, plamenik (upravljački unos T1/T2) /  
boiler, heat pump, burner (control input T1/T2)

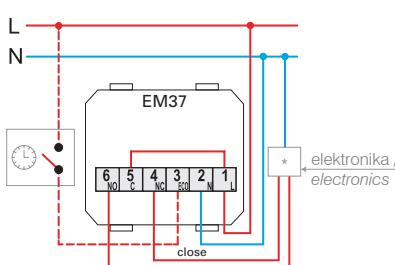


motorni pogon (ograničena uporaba s podnim grijanjem) /  
motor drive (limited use with underfloor heating)

2M = 45 x 45



### TERMOSTAT OSNOVNI 6A 230V~ 2M

- elektronički termostat, osnovni
- način rada: grijanje / hlađenje / isključeno
- napajanje: 230 VAC, 50 Hz
- izlaz: 6(2) A, 230 VAC, reljena sklopka
- raspon regulacije: +10 °C do +30 °C
- histerezis: ±0.5 °C, ED = 20min
- zaštita protiv smrzavanja (način grijanja): +6 °C
- zaštita protiv pregrijavanja (način hlađenja): +32 °C
- funkcija ECO za snižavanje temperature za 3 °C za 6 sati u načinu grijanja te povećanje temperature za 3 °C za 6 sati u načinu hlađenja
- prilagođena ECO funkcija, svaki dan automatski u isto vrijeme snižava temperaturu za 3 °C unutar 6 sati u načinu grijanja te povećava temperaturu za 3 °C unutar 6 sati u načinu hlađenja
- mogućnost uključivanja ECO funkcije vanjskim okidačem putem odvojenog unosa LED indikator načina rada
- nije prikladan za električno podno grijanje
- višljano pričvršćivanje vodiča presjeka maks. 2,5 mm<sup>2</sup>
- sukladno s LV Direktivom, EMC Direktivom, standardima EN60730-1 te EN60730-2-9
- za pravilno korištenje preporučujemo instaliranje u zasebnu kutiju, odvojenu od uređaja koji stvaraju toplinu
- temperatura korištenja: 5 °C do 35 °C
- temperatura skladištenja: -20 °C do 50 °C




### THERMOSTAT BASIC 6A 230 V ~ 2M

- electronic thermostat, basic
- operation mode: heating/cooling/turn off
- power supply: 230 VAC, 50 Hz
- output: 6(2) A, 230 VAC, relay switch
- regulation range: +10 °C to +30 °C
- hysteresis: ±0.5 °C, ED = 20min
- anti-freeze protection (heating mode): +6 °C
- overheating protection (cooling mode): +32 °C
- ECO function for lowering the temperature by 3 °C for 6 hours in the heating mode and raising temperature by 3 °C for 6 hours in the cooling mode
- adaptive ECO function, automatically every day at the same time lowers the temperature by 3 °C for 6 hours in the heating mode and raises temperature by 3 °C for 6 hours in the cooling mode
- option to turn on the ECO operating mode by external trigger via a separate input
- LED indication of operation
- not suitable for electrical floor heating
- screw contacts max. 2.5 mm<sup>2</sup>
- in accordance with the LV Directive, the EMC Directive, standards EN60730-1 and EN60730-2-9
- for correct operation, we recommend installing in an independent single box, separate from devices that generate heat
- operating temperature: 5 °C to 35 °C
- storage temperature: -20 °C to 50 °C

### postavljanje načina rada i temperature / function and temperature adjustment

tipka za izbor načina rada iLED  
indikator stanja:  
crvena: grijanje  
plava: hlađenje  
ne svijetli: isključeno

function selection button and  
LED status indicator:  
red: heating  
blue: air conditioning  
no light: switched off



### postavljanje temperature temperature setting




tipka za izbor "ECO" načina i LED indikator  
"ECO" načina  
zeleni: ECO ušteda energije UKLJUČENA  
narančasta: aktiviran prilagođeni ECO način  
ne svijetli: dnevni način

"ECO" function selection button and  
LED "ECO" status indicator  
green: ECO energy saving ON  
orange: adaptive ECO mode activated  
no light: day mode

LED indikator stanja izlaznog releja  
bijela: relej uključen  
ne svijetli: relej isključen

LED output relay state indicator  
white: relay ON  
no light: relay OFF

### upozorenja / attention



## ŠTEDNA KARTIČNA SKLOPKA 3A 250V~ 3M



- EM40PW
- EM40SB
- EM40ES
- EM40IW



- osnovna kartična sklopka, za bilo koju ISO karticu  
 - mrežni napon 230V~ 50Hz  
 - izlaz: 3A 250V~ za sklopnik\*  
 - zadrška iskljopa 15-20s  
 - sukladno normi EN 61000-6-1  
 - kartica nije priložena  
 - nije za kontrolu pristupa

## ENERGY SAVER CARD SWITCH 3A 250V~ 3M


- card switch basic, any ISO card  
 - supply voltage 230V~ 50Hz  
 - output 3A 250V~ for switching contactor \*  
 - switch off delay 15-20s  
 - in accordance with EN 61000-6-1  
 - card is not included  
 - not for access control



3M = 67,5 x 45

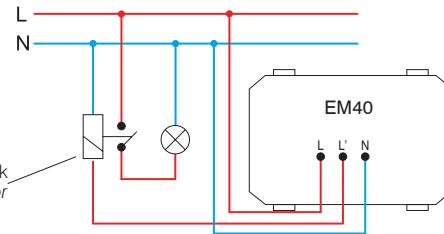

## KARTICA ISO

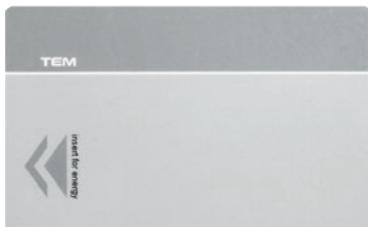

EM47


- ISO kartica  
 - za uporabu s kartičnom sklopkom EM40  
 - veličina: 85x54 mm

## CARD ISO

- ISO card  
 - for combination with card switch EM40  
 - size: 85x54 mm



■ EM44BK

**ŠTEDNA KARTIČNA SKLOPKA RF HF 13,56MHz 3M**


- kartična sklopka elektronska za RFID ISO karticu
- napajanje iz reljeve jedinice EM49 putem kablovskih konektora RJ12
- izlaz treba biti spojen na reljevi izlaz EM49
- 15-20s zadrška isklopa „glavnog napajanja“ s povlačenjem kartice
- 1 min zadrška isklopa „HVAC“ s povlačenjem kartice prilikom otvaranja balkonskih vrata ili prozora
- sukladno normi EN 61000-6-1
- kartica nije priložena
- nije za kontrolu pristupa

**ENERGY SAVER CARD SWITCH RF HF 13,56MHz 3M**

- electronic card switch for RFID ISO card
- supply from relay unit EM49 through cable connectors RJ12
- output to be connected to relay output unit EM49
- 15-20s "main power" switch off delay with card withdrawal
- 1 min "HVAC" switch off delay with card withdrawal when balcony doors or windows opened
- in accordance with EN 61000-6-1
- card is not included
- not for access control



EM49

**ŠTEDNA KONTROLNA JEDINICA 2x16A 250V~**

- reljeva jedinica za kartične sklopke EM44
- mrežni napon 230V~ 50Hz
- sukladno normi EN 61000-6-1
- montaža na DIN tračnicu 35 mm, 4MU
- ulaz i izlaz ovisno o primjeni: jednokrevetna ili dvokrevetna soba

**ENERGY SAVER CONTROL UNIT 2x16A 250V~**

- relay unit for card switches EM44
- supply voltage 230V~ 50Hz
- in accordance with EN 61000-6-1
- mounting on DIN rail 35mm, 3MU
- input and output depending on implementation: single or double room



EM45


**RAZDVAJAČ SPL-1**

- koristi se za spajanje dva periferna modula EM44 s reljefnom jedinicom EM49
- komunikacijski konektor RJ12
- veličina: 37 x 30 x 27 mm


**SPLITTER SPL-1**

- used to connect two peripheral modules EM44 to relay unit EM49
- communication connector RJ12
- size: 37 x 30 x 27 mm


dijagram spajanja za primjenu u jednokrevetnoj sobi /  
wiring diagram for single room implementation

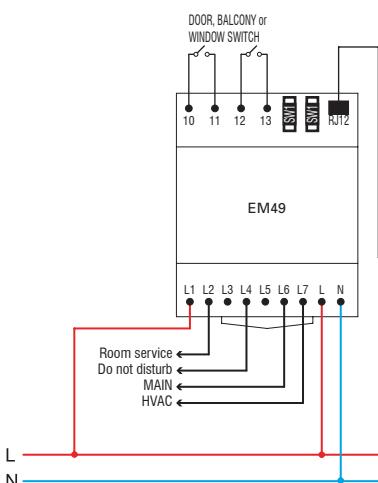


dijagram spajanja za primjenu u dvokrevetnoj sobi /  
wiring diagram for double room implementation

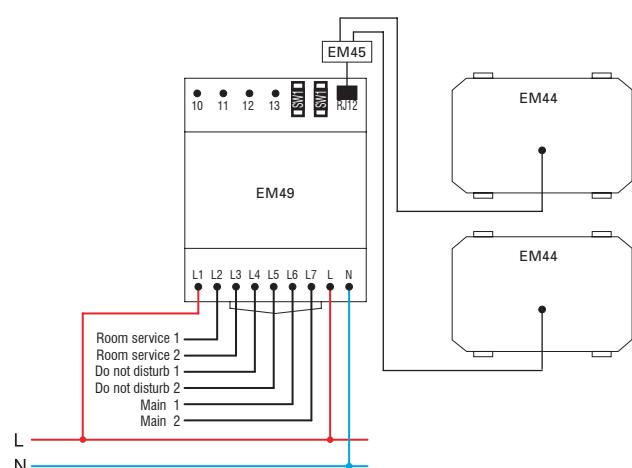


priklučni kabel RJ12 između EM44 i EM49 /  
connection cable RJ12 between EM44 and EM49

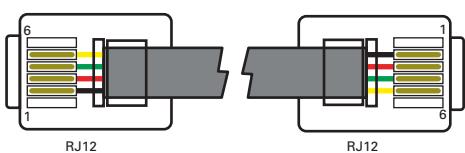

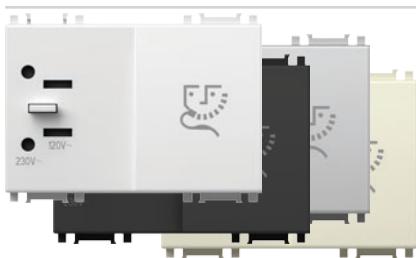


□ EM60PW  
■ EM60SB  
▢ EM60ES  
▢ EM60IW

3M = 67,5 x 45




#### UTIČNICA ZA BRIJAĆI APARAT 230V~/125V~ 3M

- utičnica za brijaći aparat s izolacijskim transformatorom 20VA
  - napajanje: 230V~ 50-60Hz
  - izlaz:
    - 230V~ za 2P 2,5A euro utikac ili 125V~ za 2P 15A američki utikac
    - razred II
    - sukladno normi EN 61558-2-5
- SOCKET SHAVER 230V~/125V~ 3M**
- shaver supply unit with isolating transformer 20VA
  - supply: 230V~ 50-60Hz
  - output:
    - 230V~ for 2P 2.5A Europlug or 125V~ for 2P 15A American plug
    - Class II
    - in accordance with EN 61558-2-5





#### JEDINICA NAPAJANJA USB 5V 1A 2M

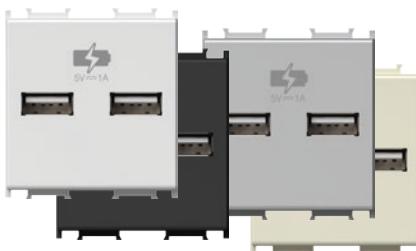

▢ EM65PW  
■ EM65SB  
▢ EM65ES  
▢ EM65IW

2M = 45 x 45



#### POWER SUPPLY UNIT USB 5V 1A 2M

- za punjenje elektroničkih uređaja putem standardnog USB priključka (sukladno i s Apple uređajima)
- omogućava istovremeno punjenje dva uređaja
- napajanje: 230V~ 50Hz
- potrošnja pri mirovanju: 50 mW pri 230V~
- nazivni izlazni napon: 5 VDC ( $\pm 5\%$ ) SELV
- njihanje (ripple) izlaznog napona: 150 mV
- nazivna izlazna snaga: 1A (1x 1.000mA ili 2 x 500mA) ( $\pm 10\%$ )
- učinkovitost: veća od 67%
- IP zaštitni razred: IP20, samo za unutrašnju uporabu
- viđano pričvršćivanje vodiča presjeka maks. 2,5 mm<sup>2</sup>
- sukladno standardu EN 60950-1 te EMC direktivi
- kao dio instalacije potrebno je uzeti u obzir odgovarajući vanjski uređaj za isključivanje




#### LED SVJETILKA ZA SLUČAJ NUŽDE 250V~ 1.5W, Ni-Mh 6h 7M




▢ EM55


7M = 151,5 x 45

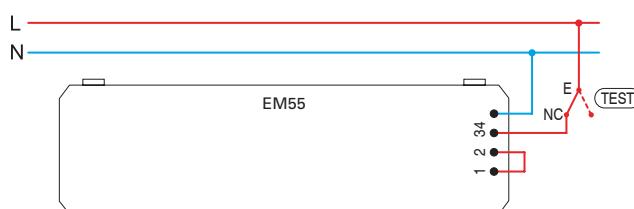

#### LED EMERGENCY LIGHT 250V~ 1.5W, Ni-Mh 6h 7M

- LED svjetiljka za slučaj nužde
  - mrežni napon 230V~ 50Hz 3x0,5W LED svjetiljke E10, zamjenjive
  - NiMh akumulator 1150 mAh, zamjenjiv
  - autonoman rad 6 h, punjenje 4 h
  - razred II
  - osvjetljenje 76lx / 0,9m<sup>2</sup>
  - sukladno normama EN 60598-1, EN 60598-2-2, EN 60598-2-22
- LED EMERGENCY LIGHT 250V~ 1.5W, Ni-Mh 6h 7M**
- emergency LED lamp
  - supply voltage 230V~ 50Hz 3x0.5W LED lamps E10, replaceable
  - NiMh accumulator 1150 mAh, replaceable
  - autonomy 6h, charging 4h
  - Class II
  - in accordance with EN 60598-1, EN 60598-2-2, EN 60598-2-22
  - illumination 76lx / 0,9m<sup>2</sup>





- EM50WH
- EM50BL
- EM50RD
- EM50GR


#### LED SVJETILJKA JEDNOBOJNA 250V~ 0,8W 2M

- LED svjetiljka za označavanje stepenica
- mrežni napon 230V~ 50Hz 0,8W
- razred II
- sukladno normi EN 60598-1
- optionalna uporaba za osvjetljavanje pravca ili signaliziranje s laserskom gravurom na difuzeru prema želji korisnika



#### LED LAMP MONOCOLOR 250V~ 0,8W 2M

- step marker LED lamp
- supply voltage 230V~ 50Hz 0,8W
- Class II
- in accordance with EN 60598-1
- optional usage for directional or signal illumination with customized laser printing on diffuser



- EM51RG


#### LED SVJETILJKA DVOBOJNA 250V~ 2x0,4W 2M

- LED svjetiljka s dvobojnom signalizacijom (crveno/zelenom)
- mrežni napon 230V~ 50Hz 2x0,4W
- razred II
- sukladno normi EN 60598-1
- difuzer obuhvaća i grafiku prema prikazu
- moguć laserski otisak na difuzeru prema želji korisnika



#### LED LAMP DUAL COLOR 250V~ 2x0,4W 2M

- signaling dual color (red/green) LED lamp
- supply voltage 230V~ 50Hz 2x0,4W
- Class II
- in accordance with EN 60598-1
- diffuser includes graphics as shown
- possible customized laser printing on diffuser



- EM52RG
- EM52RG90
- EM52RG91
- EM52RG99

#### LED SVJETILJKA 3D DVOBOJNA 250V~ 2x0,4W 2M

- LED dvobojna svjetiljka (crvena/zelena) s 3D simbolom, za označavanje
- mrežni napon 230V~ 50Hz 2x0,4W
- razred II
- sukladno normi EN 60598-1
- mogućnost otiska prilagođenih grafika po želji
- 90 muških simbola, 91 ženski simbol, 99 simbola na zahtjev





EM52RG91



EM52RG90

2M = 45 x 45

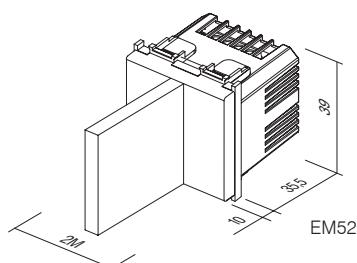



□ EM70PW  
■ EM70SB  
■ EM70ES  
■ EM70IW

### SKLOPKA NA OTISAK PRSTA ARX ONE 2M

- sklopka na otisak prsta s ugrađenom internom reljefnom jedinicom
- za otključavanje električnih brava
- kapacitet 1000 otiska prstiju
- jednostavno programiranje s dvjema tipkama
- toplinski biometrijski senzor
- napajanje 110-230V~ 50-60Hz preko interne reljefne jedinice
- izlazni reljef 2x3A 12V DC
- 256-bitna enkriptirana veza između sklopke i interne reljefne jedinice
- sukladno normi EN 61000-6-1

### FINGERPRINT SWITCH ARX ONE 2M

- fingerprint switch with included internal relay unit
- for unlocking electrical locks
- capacity 1000 fingerprints
- easy programming with two buttons
- thermal biometric sensor
- internal relay unit supply 110-230V~ 50-60Hz
- output relay 2x3A 12V DC
- 256-bit encrypted link between switch and internal relay unit
- in accordance with EN 61000-6-1



#### REGISTRACIJA OVLAŠTENE OSOBE

1. Prva tri otiska prsta pri registraciji dobivaju upravljačka prava.
2. Postupak registracije ovlaštene osobe isti je kao kod registracije korisnika bez drugog koraka.

#### ADMINISTRATOR ENROLMENT

- 1.The first three fingerprints enrolled are assigned administrative rights.
- 2.Administrator enrolment procedure is same as user enrolment without second step.

#### REGISTRACIJA KORISNIKA

1. Lijevu tipku na vanjskoj jedinici pritisnuti u trajanju od 3 sekunde. Narančasto LED svjetlo trepi sporom brzinom.
2. Ovlaštena osoba treba jedanput lupnuti prstom po senzoru. Nakon što je identificirana, narančasto LED svjetlo počet će brzo bljeskati.
3. Pritisnuti lijevu tipku. Zeleno LED svjetlo daje potvrdu.
4. Narančasto i zeleno svjetlo bljeskati će naizmjenično. U tom trenutku korisnik mora četiri puta lupnuti prstom po senzoru. Svaki uspješan ulaz potvrđuje se zvučnim signalom.
5. Nakon što je korisnik propisno registriran, bljeskati će zeleno LED svjetlo, a zvono će istovremeno proizvoditi zvuk.

#### USER ENROLMENT

- 1.The left button on the exterior unit is pressed for 3 seconds. The orange LED starts flashing slow.
- 2.An administrator swipes his finger over the sensor once. When he/she is identified, the orange LED will start flashing fast.
- 3.Press left button. The green LED confirms.
- 4.The orange and green LED will flash alternately. At this point the user swipes his/her finger over the sensor four times. Each successful entry is indicated by a buzz.
- 5.When the user is correctly enrolled, the green LED will flash and the buzzer will buzz at the same time.

#### BRISANJE KORISNIKA

1. Pritisnuti desnu tipku na vanjskoj jedinici u trajanju od 5 sekundi, nakon čega će početi sporo bljeskati narančasto LED svjetlo.
2. Ovlaštena osoba treba jedanput lupnuti prstom po senzoru. Nakon što je identificirana, bljeskati će zeleno LED svjetlo, a zvono će istovremeno proizvoditi zvuk.
3. Crveno i zeleno LED svjetlo bljeskati će naizmjenično. Zatim će korisnik jedanput lupnuti prstom po senzoru. Kad je korisnik bude identificiran, bljeskati će zeleno LED svjetlo, a će se oglasiti zvučnim signalom. Korisnik je uspješno izbrisani iz sustava.

#### DELETING A USER




- 1.The right button on the exterior unit should be pressed for 5 seconds whereupon the orange LED will start flashing slow.
- 2.An administrator swipes his finger over the sensor once. When he/she is identified, the green LED will flash and the buzzer will buzz at the same time.
- 3.The red and green LED will flash alternately. Then the user swipes his finger over the sensor once. When the user is identified, the green LED flash and the buzzer will buzz once. The user has been successfully deleted from the system.

#### BRISANJE SVIH OTISAKA PRSTIJU

- 1.Pritisnite zajedno lijevu i desnu tipku na vanjskoj jedinici u trajanju od 10 sekundi, nakon čega će naizmjenično i crveno LED svjetlo bljeskati naizmjenično.
- 2.Ovlaštena će osoba zatim lupnuti jedanput prstom. Identifikacija je potvrđena kada bljesne zeleno LED svjetlo, a zvono istovremeno proizvodi zvuk. Narančasto i crveno LED svjetlo opet će naizmjenično bljeskati. Ovlaštena osoba ponavlja drugi korak.
- 3.Crveno i narančasto LED svjetlo bljeskati će, a zvono će istovremeno pet puta proizvesti zvuk. Svi predlošci otiska prstiju bit će zatim izbrisani.



#### DELETING ALL FINGERPRINTS

- 1.Press the left and right button on the exterior unit together for a period of 10 seconds whereupon the orange and red LED will flash alternately.
- 2.The administrator then swipes his finger once. Identification is confirmed when the green LED flashes and the buzzer buzzes at the same time.
- 3.The orange and red LED will flash alternately again. The administrator repeats secod step.
- 4.The red and orange LED will flash and the buzzer will buzz five times simultaneously. All fingerprint templates will then have been deleted.

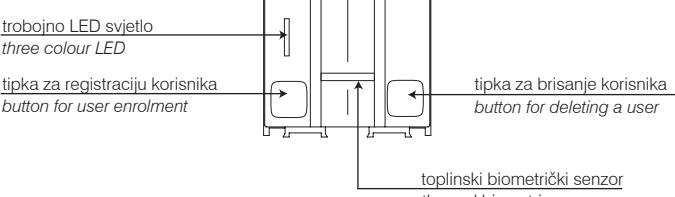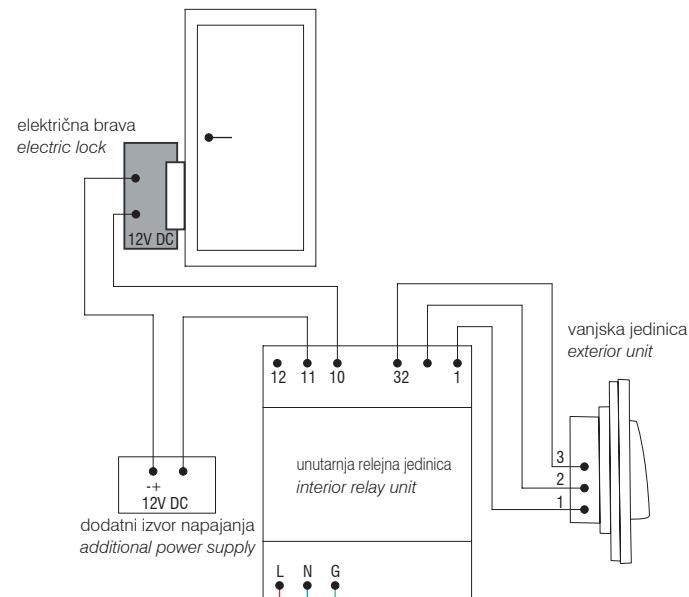

vanjska jedinica  
exterior unit

unutarnja relejna jedinica  
interior relay unit





■ EM80GW

**SKLOPKA, BESKONTAKTNA 10A 240V~**

- beskontaktna sklopka za uključivanje i isključivanje („glavna“)
- napajanje: 240 V~ 50 Hz
- izlazni reljef 10A / 250V~ (2400W pri 240V~)
- prilagodljivi raspon od 2 do 10 cm
- namijenjeno za ugradnju u standardnu okruglu kutiju Ø60 mm
- neutralan kabel (N) je potreban za spajanje
- nije moguće kombiniranje polužnog sklopka
- moguće je povezivanje s do 5 EM81 upravljačkih sklopki
- jednostavna ugradnja dekorativnih poklopaca uz pomoć magneta
- vijčano pričvršćivanje kabela do 2.5 mm<sup>2</sup> (maks. vijčani moment zatezanja 0.4 Nm)
- sukladno normama EN 60669-1 i EN 60669-2-1
- samo za unutrašnju uporabu

**SWITCH, TOUCHLESS 10A 240V~**

- touchless switch for turning on/off ("master")
- power supply: 240 V~ 50 Hz
- output relay 10A / 250V~ (2400W at 240V~)
- adjustable range from 2 to 10 cm
- intended for installation into a standard round Ø60 mm box
- a neutral lead (N) is required for connection
- connection with toggle switches is not possible
- connection with up to 5 EM81 control switches is possible
- simple installation of decorative covers with the help of magnets
- screw fastening of leads up to 2.5 mm<sup>2</sup> (max. screw tightening torque is 0.4 Nm)
- in accordance with EN 60669-1 and EN 60669-2-1
- only for indoor use







■ EM81GW


**SKLOPKA, BESKONTAKTNA, UPRAVLJAČKA JEDINICA**

- upravljačka sklopka ("slave")
- radi samo kad je spojena sa sklopkom EM80 („glavna“)
- jednostavna ugradnja dekorativnih poklopaca uz pomoć magneta
- vijčano pričvršćivanje kabela do 2.5 mm<sup>2</sup> (maks. vijčani moment zatezanja 0.4 Nm)
- sukladno normama EN 60669-1 i EN 60669-2-1
- samo za unutrašnju uporabu

**SWITCH, TOUCHLESS, CONTROL UNIT**

- control switch ("slave")
- works only when connected with the EM80 switch ("master")
- simple installation of decorative covers with the help of magnets
- screw fastening of leads up to 2.5 mm<sup>2</sup> (max. screw tightening torque is 0.4 Nm)
- in accordance with EN 60669-1 and EN 60669-2-1
- only for indoor use

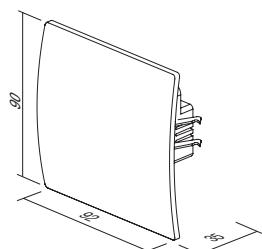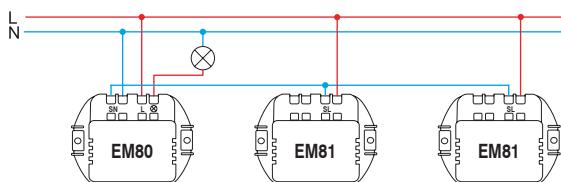


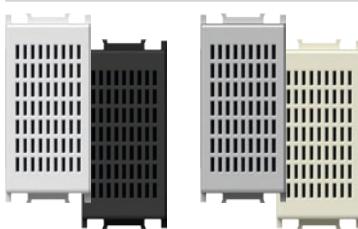

- EM90PW
- EM90SB
- EM90ES
- EM90IW

#### ZVONO 8VA 230V~ 1M



- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon 230V~ 50Hz 8VA

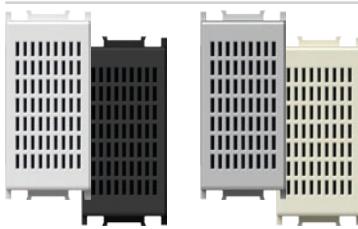

- EM91PW
- EM91SB
- EM91ES
- EM91IW

#### ZVONO 8VA 12V~ 1M



- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon 230V~ 50Hz 8VA

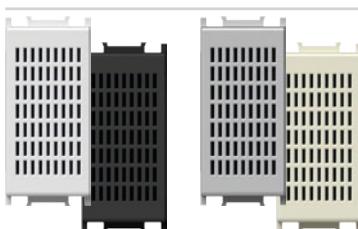

- EM92PW
- EM92SB
- EM92ES
- EM92IW

#### ZVONO 8VA 230V~ 1M




- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon 230V~ 50Hz 8VA

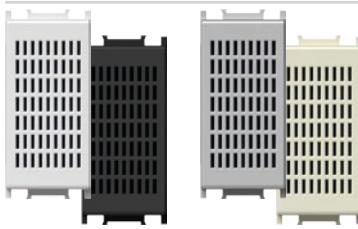

- EM93PW
- EM93SB
- EM93ES
- EM93IW

#### ZVONO 8VA 12V~ 1M

- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon 230V~ 50Hz 8VA

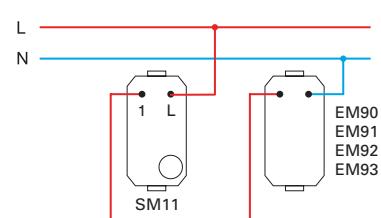




- EM95PW
- EM95SB
- EM95ES
- EM95IW

#### REGULATOR GLASNOĆE ZA 100V AUDIO LINIJU 35W 2M



- regulator glasnoće (atenuator) za 100V audio sustave
- nazivna snaga 35W (maks.45W), 6 razina glasnoće
- prikladan za ugradnju u kutije najmanje 60 mm dubine
- nije prikladan za ugradnju u kutije dubine 45 mm te podžbuknu ugradnju u kutije CUBO IP20
- samo za unutrašnju uporabu

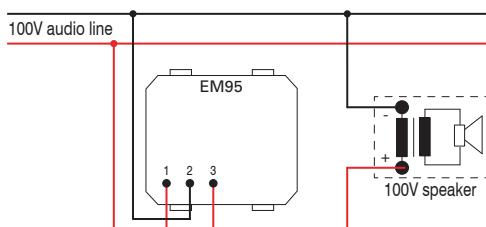

- EM96PW
- EM96SB
- EM96ES
- EM96IW

#### REGULATOR GLASNOĆE 4-8 Ω 35W 2M

- regulator glasnoće za niskonaponske izlaze 4-8 Ω, 35W
- nazivna snaga 35W, 6 razina glasnoće
- prikladan za ugradnju u kutije najmanje 60 mm dubine
- nije prikladan za ugradnju u kutije dubine 45 mm te podžbuknu ugradnju u kutije CUBO IP20
- samo za unutrašnju uporabu

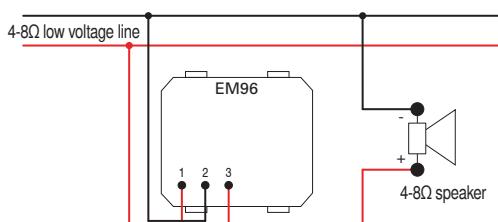




CM25

PW

OS


tip type	naziv description	tehnički podaci technical data	veličina size	boja colour	opcijeski podaci 1 optional data 1
CM10	SET UTIČNICA 2X ŠUKO SOCKET SET 2x SCHUKO	2P+E 16A 250V~	4M	<input type="checkbox"/> PW bijela sjajna polar white	<input type="checkbox"/> OL okvir LINE cover plate LINE
CM11	SET UTIČNICA 3X ŠUKO SOCKET SET 3x SCHUKO	2P+E 16A 250V~	7M	<input checked="" type="checkbox"/> SB crna mat soft touch black	<input type="checkbox"/> OS okvir SOFT cover plate SOFT
CM15	SET SPOJNIH VODOVA LINK WIRE SET	3x1.5mm <sup>2</sup>	1M	<input type="checkbox"/> ES srebrna mat elox silver	
				<input type="checkbox"/> IW bež sjajna ivory white	

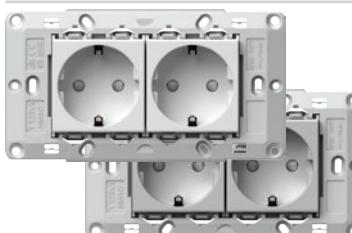

CM10PW  
 CM10ES

#### SET UTIČNICA 2x ŠUKO 2P+E 16A 250V~ 4M

- set utičnica 2x šuko VM10 2P+E 16A 250V~
- utičnice povezane spojnim vodovima CM16
- s nosačem 4M bez vijaka
- za pričvršćivanje nosača vijci CM17, CM18 ili CM19
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- sukladno normi IEC 60884-1, CEE7




**SOCKETS SET 2x SCHUKO 2P+E 16A 250V~ 4M**  
 - socket set 2x schuko VM10 2P+E 16A 250V~  
 - prewired with link wires CM16  
 - with mounting frame 4M without screws  
 - for mounting frame fixing use screws CM17, CM18 or CM19  
 - screw contacts 1.5-2.5 mm<sup>2</sup>  
 - in accordance with IEC-60884-1, CEE7



CM11PW  
 CM11ES


#### SET UTIČNICA 3x ŠUKO 2P+E 16A 250V~ 7M


- set utičnica 3x šuko VM10 2P+E 16A 250V~
- utičnice povezane spojnim vodovima CM16
- s nosačem 7M bez vijaka
- za pričvršćivanje nosača vijci CM17, CM18 ili CM19
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- sukladno normi IEC 60884-1, CEE7



**SOCKETS SET 3x SCHUKO 2P+E 16A 250V~ 7M**  
 - socket set 3x schuko VM10 2P+E 16A 250V~  
 - prewired with link wires CM16

- with mounting frame 7M without screws
- for mounting frame fixing use screws CM17, CM18 or CM19
- screw contacts 1.5-2.5 mm<sup>2</sup>
- in accordance with IEC-60884-1, CEE7

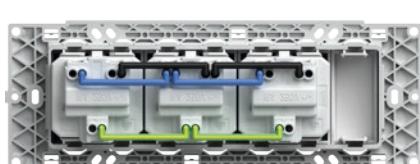





CM15

**SET SPOJNIH VODOVA 3x1,5mm<sup>2</sup> 1M**

- set spojnih vodova za povezivanje dvaju elemenata veličine 1M
- sadrži 10 crnih, 10 plavih i 10 žuto-zelenih spojnih vodova

**LINK WIRE SET 3x1.5mm<sup>2</sup> 1M**

- link wire set to connect two elements size 1M
- includes 10 black, 10 blue and 10 yellow/green wires





CM16

**SET SPOJNIH VODOVA 3x2,5mm<sup>2</sup> 1M**

- set spojnih vodova za povezivanje dvaju elemenata veličine 2M
- sadrži 10 crnih, 10 plavih i 10 žuto-zelenih spojnih vodova

**LINK WIRE SET 3x2.5mm<sup>2</sup> 1M**


- link wire set to connect two elements size 2M
- includes 10 black, 10 blue and 10 yellow/green wires

CM17  
CM18  
CM19**SET VIJAKA 3,5**

- set vijaka za pričvršćivanje nosača NM30, NM32, NM40, NM41, NM70
- CM17 - l=20 mm, 100 kom.
- CM18 - l=35 mm, 50 kom.
- CM19 - l=50mm, 50 kom.

**SCREW SET 3,5**

- screw set for fixing mounting frames NM30, NM32, NM40, NM41, NM70
- CM17 - l=20mm, 100pcs
- CM18 - l=35mm, 50pcs
- CM19 - l=50mm, 50pcs

 CM22PW**SET ZA SKLOPKE IP44 2M**

- za ugradnju u vlažne prostore
- IP44 zaštita za sve Modul sklopke
- sklopke i tipke nisu sastavni dio seta
- okvir SOFT 2M s natpisnom pločicom
- sukladno normi IEC 60669-1

**SET SWITCHES IP44 2M**


- for usage in humid areas
- IP44 protection provides for all Modul switches
- switches and buttons are not part of the set
- SOFT 2M cover plate with inscription plate
- in accordance with IEC 60669-1

 CM23PW**SET ZA UTIČNICU IP44 2M**

- za ugradnju u vlažne prostore
- pruža IP44 zaštitu u kombinaciji s pokrivenom utičnicom (VM11, VM41)
- utičnice nisu sastavni dio seta
- okvir SOFT 2M s natpisnom pločicom
- sukladno normi IEC 60884-1

**SET SOCKETS IP44 2M**

- for usage in humid areas
- IP44 protection can be achieved only in combination with covered socket (VM11, VM41)
- sockets are not part of the set
- SOFT 2M cover plate with inscription plate
- in accordance with IEC 60884-1

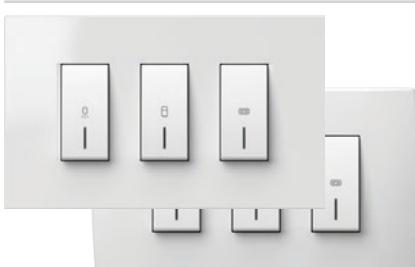

CM25PWOL  
 CM25IWOL


CM25PWOS  
 CM25IWOS


**KUPAONSKI SET 3x20AX 250V~ 4M**

- set sklopki 3xSM12 20AX 250V~ s nosačem i okvrom
- višljano pričvršćivanje vodiča presjeka 1,5-2.5mm<sup>2</sup>
- sukladno normi EN 60669-1
- univerzalno rješenje za pričvršćivanje na već ugrađene kutije s razmakom pričvršćivanja od 108 do 135 mm ili na kutije veličine 4M
- visina okvira 90 mm

**SWITCH SET FOR BATHROOM 3x20AX 250V~ 4M**

- switch set 3xSM12 20AX 250V~ with mounting frame and cover plate
- screw contacts 1.5-2.5mm<sup>2</sup>
- in accordance with EN 60669-1
- universal solution for renovation on boxes with fixing dimensions 108-135mm or boxes 4M size
- cover plate height 90mm






NM41

**NOSAČI ZA KUPAONSKI SET 4M**

- univerzalni nosač za kupaonski set s vijcima
- univerzalno rješenje za pričvršćivanje na pravokutne kutije s razmakom pričvršćivanja od 108 do 135 mm ili na kutije veličine 4M
- sukladno normi EN 60669-1

**MOUNTING FRAME BATHROOM SET 4M**

- universal mounting frame for bathroom set with screws
- universal solution for mounting on rectangular boxes with fixing dimensions 108-135mm or boxes 4M size
- in accordance with EN 60669-1





- |        |
|--------|
| OL41PW |
| OL41NB |
| OL41IW |
| OL41ES |
| OL41SG |
| OL41IB |
| OL41MG |

**OKVIRI LINE ZA KUPAONSKI SET**

- dekorativni okvir LINE za kupaonski set
- visina 90 mm
- sukladno normi EN 60669-1

**COVER PLATE LINE BATHROOM SET**

- decorative cover plate bathroom set LINE
- height 90mm
- in accordance with EN 60669-1




- |        |
|--------|
| OS41PW |
| OS41NB |
| OS41IW |
| OS41ES |
| OS41SG |
| OS41SB |
| OS41WE |

**OKVIRI SOFT ZA KUPAONSKI SET**

- dekorativni okvir SOFT za kupaonski set
- visina 90 mm
- sukladno normi EN 60669-1


**COVER PLATE SOFT BATHROOM SET**

- decorative cover plate bathroom set SOFT
- height 90mm
- in accordance with EN 60669-1



S E T S C M

E O D U L

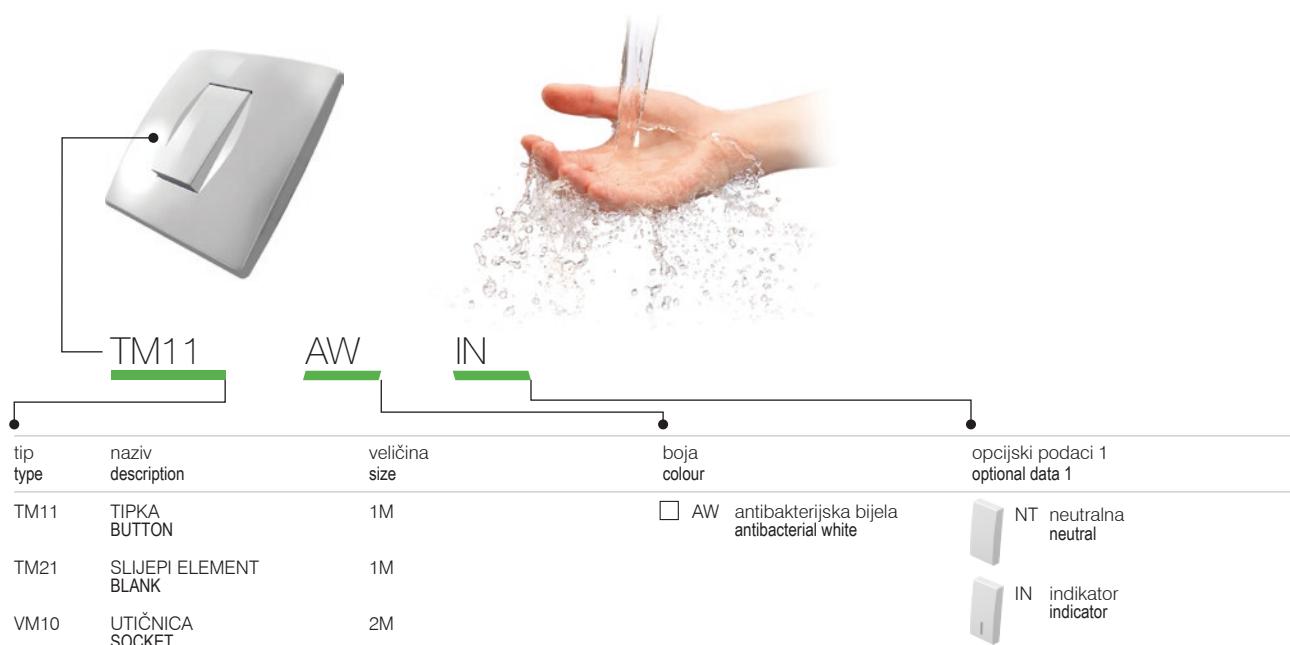**ANTIBAKTERIJSKI PROGRAM MODUL**

- brojne osobe svakodnevno dotiču sklopke i utičnice koje su stoga mesta razvoja i širenja bakterija
- zahvaljujući prirodnim antibakterijskim svojstvima, srebro se tri tisuće godina korišta kao sigurno dezinfekcijsko sredstvo, jer je potpuno prirodan i neškodljiv materijal te ne zagađuje okoliš
- posebni antibakterijski ioni srebra pružaju dugotrajanu, pouzdanu i učinkovitu zaštitu od razvoja i širenja bakterija, virusa, mikroba i gljivica
- antibakterijska zaštita osigurava kvalitetnu higijenu, čistotu i zdravlje ljudima
- savršeno prikladan za korištenje u okruženjima koja zahtijevaju stroge higijenske uvjete (bolnice, zdravstveni centri, farmaceutska postrojenja, domovi za starije i nemoćne, domovi umirovljenika, laboratorijski, restoran, hoteli, zračne luke, autobusne i željezničke postaje, poslovni i trgovacki prostori, javne institucije...)
- neovisni laboratorijski obavili su testiranja sukladno najvišim japanskim standardima JIS Z 2801
- niski troškovi osiguravanja ljudskog zdravlja
- dizajn i funkcionalnost antibakterijskog programa MODUL omogućava jednostavno čišćenje i održavanje
- antibakterijske tipke, okvir i utičnice kombinirani su sa standardnim ugradbenim okvirima i sklopkama
- proizvodi su označeni sa stražnje strane kao AB (antibakterijska bijela)

**ANTIBACTERIAL PROGRAM MODUL**

- switches and sockets are daily touched by many people, so this is a common place for development and spread of bacteria
- thanks to its natural antibacterial characteristics silver has been used for three millennia as a safe and effective disinfectant, since it is completely natural, healthy and environmentally friendly
- special antibacterial silver ions additive provides long-term, reliable and effective protection against the development and spread of bacteria, viruses, microbes and fungi
- antibacterial protection ensures hygiene, cleanliness and health for people
- perfectly suitable for use in environments with strict hygiene conditions (hospitals, health centers, pharmaceutical facilities, homes for elderly, nursing homes, laboratories, restaurants, hotels, airports, bus and railway stations, business and shopping areas, public institutions ...)
- independent laboratory testings have been carried out in accordance with highest Japanese standards JIS Z 2801
- low cost for providing human health
- design and functionality of antibacterial program MODUL allow easy cleaning and maintenance
- antibacterial buttons, cover plates and sockets are combined with classic mounting frames and switches
- products are labelled on the back with AW (antibacterial white)

**TIPKA 1M** TM11AW

- zamjenjiva tipka 1M  
- sukladno normi EN 60669-1  
- antibakterijska zaštita usklađena s JIS Z 2801

**BUTTON 1M**

- replaceable button 1M  
- in accordance with EN 60669-1  
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 1M INDIKATOR** TM11AWIN

- zamjenjiva tipka 1M  
- sukladno normi EN 60669-1  
- antibakterijska zaštita usklađena s JIS Z 2801

**BUTTON 1M INDICATOR**

- replaceable button 1M  
- in accordance with EN 60669-1  
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 2M** TM12AW

- zamjenjiva tipka 2M s nosačem tipke  
- upotrebljava se pri nadogradnji sklopke ili tipkala od veličine 1M na veličinu 2M  
- sukladno normi EN 60669-1  
- antibakterijska zaštita usklađena s JIS Z 2801

**BUTTON 2M**

- replaceable button 2M with button carrier  
- to upgrade switch or push button  
from size 1M to size 2M  
- in accordance with EN 60669-1  
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 2M INDIKATOR** TM12AWIN

- zamjenjiva tipka 2M s nosačem tipke  
- upotrebljava se pri nadogradnji sklopke ili tipkala od veličine 1M na veličinu 2M  
- sukladno normi EN 60669-1  
- antibakterijska zaštita usklađena s JIS Z 2801

**BUTTON 2M INDICATOR**

- replaceable button 2M with button carrier  
- to upgrade switch or push button  
from size 1M to size 2M  
- in accordance with EN 60669-1  
- antibacterial protection in accordance with JIS Z 2801

**SLIJEPI ELEMENT 1M** TM21AW

- slijepi element za popunjavanje praznog mesta  
- sukladno normi EN 60669-1  
- antibakterijska zaštita usklađena s JIS Z 2801

**BLANK 1M**

- blank modul to fill up empty spaces  
- in accordance with EN 60669-1  
- antibacterial protection in accordance with JIS Z 2801

**SLIJEPI ELEMENT 2M** TM22AW

- slijepi element za popunjavanje praznog mesta  
- sukladno normi EN 60669-1  
- antibakterijska zaštita usklađena s JIS Z 2801

**BLANK 2M**

- blank modul to fill up empty spaces  
- in accordance with EN 60669-1  
- antibacterial protection in accordance with JIS Z 2801





VM10AW

UTIČNICA ŠUKO+KS 2P+E 16A 250V~ 2M

- 2P+E šuko
  - 16A 250V~, tip VM10
  - sukladno normama IEC 60884-1, CEE7
  - višjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - KS zaštita za djecu od dodira kontakta
  - antibakterijska zaštita uskladena s JIS Z 2801
- SOCKET SCHUKO+KS 2P+E 16A 250V~ 2M**
- 2P+E schuko
  - 16A 250V~, type VM10
  - in accordance with IEC 60884-1, CEE7
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts
  - antibacterial protection in accordance with JIS Z 2801



VM11AW

UTIČNICA ŠUKO+KS +POKLOPAC 2P+E 16A 250V~ 2M

- 2P+E šuko+poklopac
  - 16A 250V~, tip VM11
  - sukladno normama IEC 60884-1, CEE7
  - višjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - KS zaštita za djecu od dodira kontakta
  - antibakterijska zaštita uskladena s JIS Z 2801
- SOCKET SCHUKO+KS+COVER 2P+E 16A 250V~ 2M**
- 2P+E schuko+cover
  - 16A 250V~, type VM11
  - in accordance with IEC 60884-1, CEE7
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts
  - antibacterial protection in accordance with JIS Z 2801



VM20AW

UTIČNICA EURO+KS 2P 10A 250V~ 1M

- 2P Euro
  - 10A 250V~, tip VM20
  - sukladno normama IEC 60884-1, CEE7
  - višjano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - KS zaštita za djecu od dodira kontakta
  - antibakterijska zaštita uskladena s JIS Z 2801
- SOCKET EURO+KS 2P 10A 250V~ 1M**
- 2P Euro
  - 10A 250V~, type VM20
  - in accordance with IEC 60884-1, CEE7
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - KS build-in child protection - shuttered live contacts
  - antibacterial protection in accordance with JIS Z 2801



KM11AW



UTIČNICA TV ZAVRŠNA 1dB 1M

- TV završna
- propušta frekvenciju u rasponu 5÷2400 MHz
- prigušenje < 1 dB
- sukladno normi EN 50083-1
- višjano pričvršćivanje
- antibakterijska zaštita uskladena s JIS Z 2801



SOCKET TV END-LINE 1dB 1M

- TV end-line
- frequency range 5÷2400 MHz
- reduction < 1 dB
- in accordance with EN 50083-1
- screw contacts
- antibacterial protection in accordance with JIS Z 2801



KM35AW

ADAPTER KS 1M

- KS keystone standard pričvršćivanja
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- nije ugrađen komunikacijski modul
- antibakterijska zaštita uskladena s JIS Z 2801



ADAPTER KS 1M

- KS keystone fixing standard
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- communication module not included
- antibacterial protection in accordance with JIS Z 2801



OS20AW

**OKVIR SOFT 2M**

- dekorativni okvir SOFT 2M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**COVER PLATE SOFT 2M**

- decorative cover plate SOFT 2M*
- in accordance with EN 60669-1*
- antibacterial protection in accordance with JIS Z 2801*



OS24AW

**OKVIR SOFT 2x2M**

- dekorativni okvir SOFT 2x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**COVER PLATE SOFT 2x2M**

- decorative cover plate SOFT 2x2M*
- horizontal or vertical mounting*
- in accordance with EN 60669-1*
- antibacterial protection in accordance with JIS Z 2801*



OS26AW

**OKVIR SOFT 3x2M**

- dekorativni okvir SOFT 3x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**COVER PLATE SOFT 3x2M**

- decorative cover plate SOFT 3x2M*
- horizontal or vertical mounting*
- in accordance with EN 60669-1*
- antibacterial protection in accordance with JIS Z 2801*



OS30AW

**OKVIR SOFT 3M**

- dekorativni okvir SOFT 3M
- antibakterijska zaštita uskladena s JIS Z 2801
- sukladno normi EN 60669-1

**COVER PLATE SOFT 3M**

- decorative cover plate SOFT 3M*
- antibacterial protection in accordance with JIS Z 2801*
- in accordance with EN 60669-1*




OS40AW

**OKVIR SOFT 4M**

- dekorativni okvir SOFT 4M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**COVER PLATE SOFT 4M**

- decorative cover plate SOFT 4M*
- in accordance with EN 60669-1*
- antibacterial protection in accordance with JIS Z 2801*

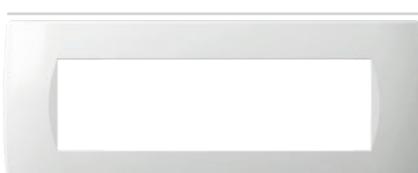




OS70AW

**OKVIR SOFT 7M**

- dekorativni okvir SOFT 7M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**COVER PLATE SOFT 7M**

- decorative cover plate SOFT 7M*
- in accordance with EN 60669-1*
- antibacterial protection in accordance with JIS Z 2801*

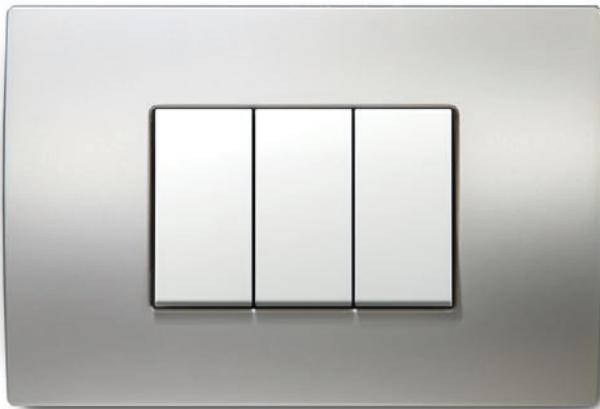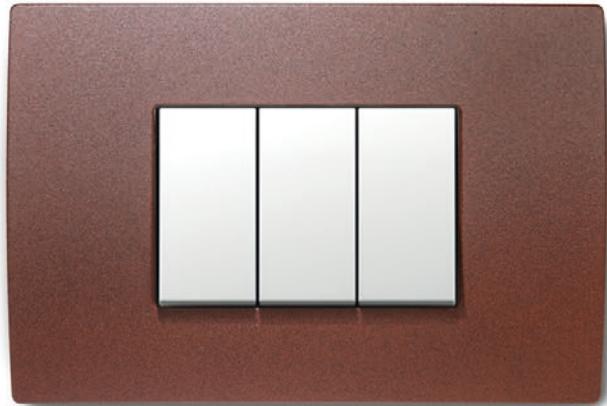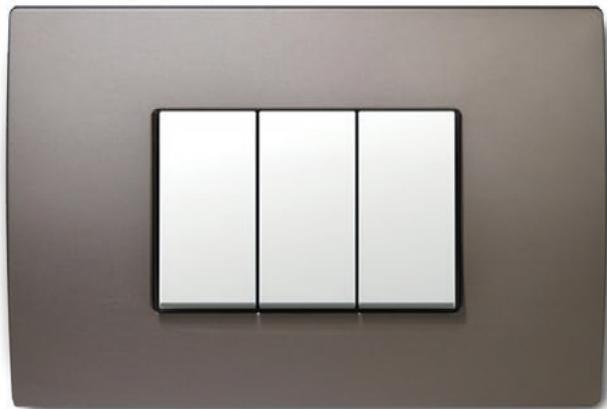**metal  
metal**MH kovani čelik  
hammered steelMS satenski srebrna  
satin silverME lijevano željezo  
etched ironMN satenski poniklani  
satin nickel

## C O V E R P L A T E S P U R E O P

drvo  
wood

WB bambus  
bamboo




WM javor  
maple




staklo  
glass

GW ledeno bijela  
ice white

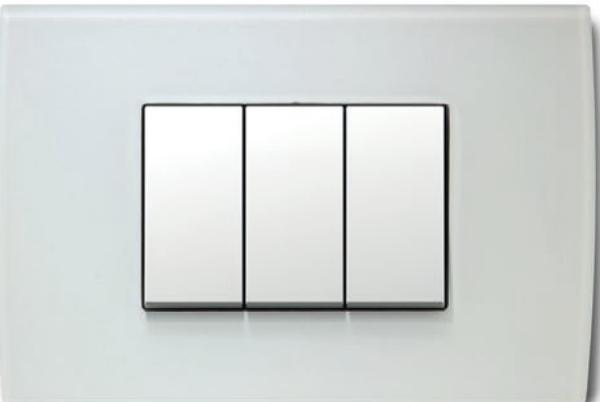

GY ledeno siva  
ice grey

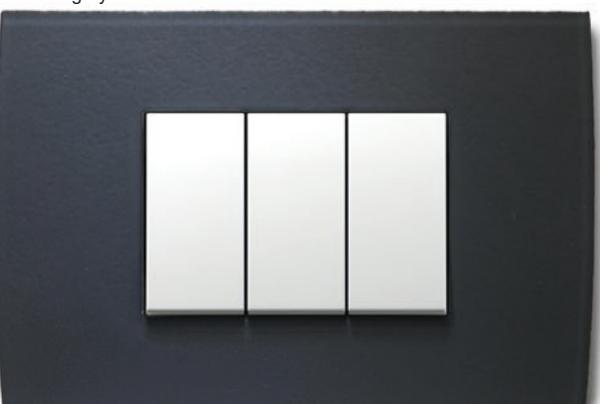


WW orah  
walnut




WE wenge  
wenge



GG ledeno zelena  
ice green

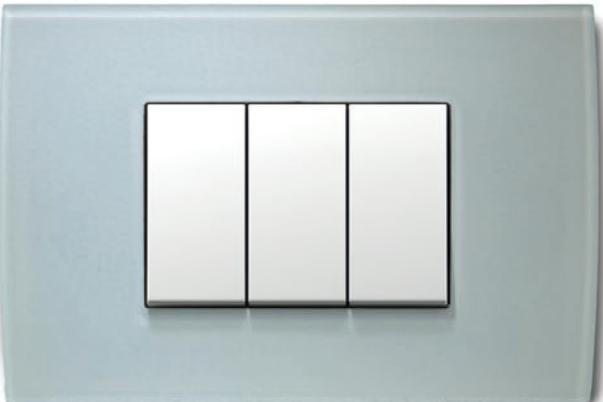

GB ledeno plava  
ice blue

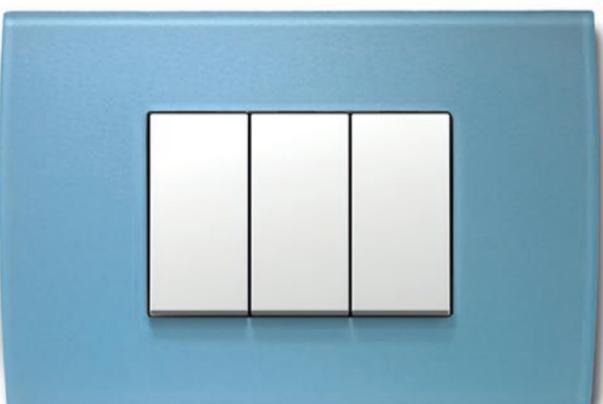



tip type	naziv description	veličina size	boja colour
OP13	OKVIR PURE COVER PLATE PURE	1/3M	MH kovani čelik hammered steel
OP20	OKVIR PURE COVER PLATE PURE	2M	ME lijevano željezo etched iron
OP23	OKVIR PURE COVER PLATE PURE	2/3M	MS satenski srebrna satin silver
.	.	.	WM javor maple
.	.	.	GY ledeno siva ice grey
.	.	.	WE wenge wenge
			GB ledno plava ice blue



OP20MH  
OP20ME  
OP20MS  
OP20MN


OP20WB  
OP20WW  
OP20WM  
OP20WE  
OP20GW  
OP20GG  
OP20GY  
OP20GB

#### OKVIR PURE 2M

- dekorativni okvir PURE 2M
- sukladno normi EN 60669-1
- samo u kombinaciji s nosačem NM24 ili NM25

#### COVER PLATE PURE 2M

- decorative cover plate PURE 2M
- in accordance with EN 60669-1
- only in combination with mounting frame NM24 or NM25



OP24MH  
OP24ME  
OP24MS  
OP24MN

OP24WB  
OP24WW  
OP24WM  
OP24WE  
OP24GW  
OP24GG  
OP24GY  
OP24GB

#### OKVIR PURE 2x2M

- dekorativni okvir PURE 2x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- samo u kombinaciji s nosačem NM24 ili NM25

#### COVER PLATE PURE 2x2M

- decorative cover plate PURE 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- only in combination with mounting frames NM24 or NM25



OP26MH  
OP26ME  
OP26MS  
OP26MN

OP26WB  
OP26WW  
OP26WM  
OP26WE  
OP26GW  
OP26GG  
OP26GY  
OP26GB

#### OKVIR PURE 3x2M

- dekorativni okvir PURE 3x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- samo u kombinaciji s nosačem NM24 ili NM25

#### COVER PLATE PURE 3x2M

- decorative cover plate PURE 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- only in combination with mounting frames NM24 or NM25

## COVER PLATES PURE OP



OP30MH  
OP30ME  
OP30MS  
OP30MN


OP30WB  
OP30WW  
OP30WM  
OP30WE  
OP30GW  
OP30GG  
OP30GY  
OP30GB

## OKVIR PURE 3M

- dekorativni okvir PURE 3M  
- sukladno normi EN 60669-1

## COVER PLATE PURE 3M

- decorative cover plate PURE 3M  
- in accordance with EN 60669-1

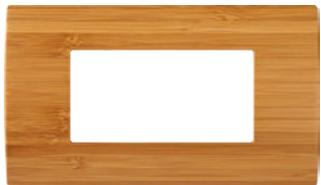

OP40MH  
OP40ME  
OP40MS  
OP40MN

OP40WB  
OP40WW  
OP40WM  
OP40WE  
OP40GW  
OP40GG  
OP40GY  
OP40GB

## OKVIR PURE 4M

- dekorativni okvir PURE 4M  
- sukladno normi EN 60669-1

## COVER PLATE PURE 4M

- decorative cover plate PURE 4M  
- in accordance with EN 60669-1



OP70MH  
OP70ME  
OP70MS  
OP70MN

OP70WB  
OP70WW  
OP70WM  
OP70WE  
OP70GW  
OP70GG  
OP70GY  
OP70GB

## OKVIR PURE 7M

- dekorativni okvir PURE 7M  
- sukladno normi EN 60669-1

## COVER PLATE PURE 7M

- decorative cover plate PURE 7M  
- in accordance with EN 60669-1



OP13MH  
OP13ME  
OP13MS  
OP13MN

OP13WB  
OP13WW  
OP13WM  
OP13WE  
OP13GW  
OP13GG  
OP13GY  
OP13GB

## OKVIR PURE 1/3M

- dekorativni okvir PURE 1/3M  
- sukladno normi EN 60669-1

## COVER PLATE PURE 1/3M

- decorative cover plate PURE 1/3M  
- in accordance with EN 60669-1



OP23MH  
OP23ME  
OP23MS  
OP23MN




OP23WB  
OP23WW  
OP23WM  
OP23WE  
OP23GW  
OP23GG  
OP23GY  
OP23GB

## OKVIR PURE 2/3M

- dekorativni okvir PURE 2/3M  
- sukladno normi EN 60669-1

## COVER PLATE PURE 2/3M

- decorative cover plate PURE 2/3M  
- in accordance with EN 60669-1

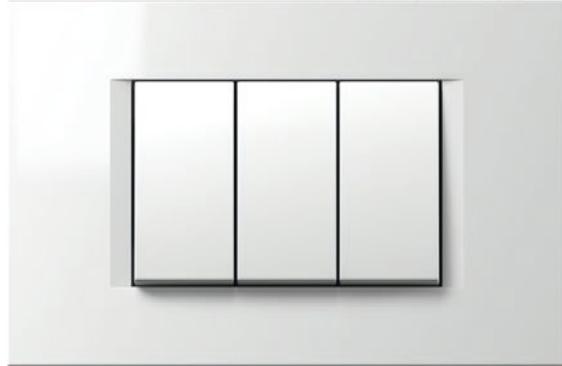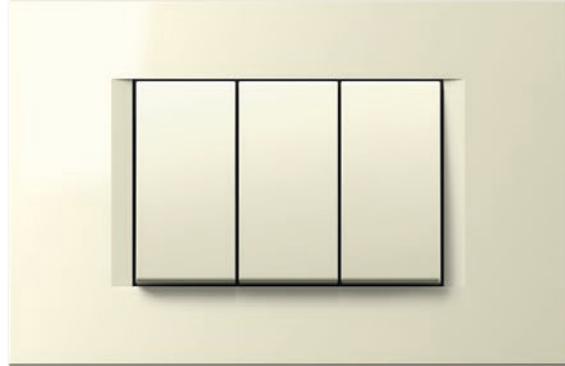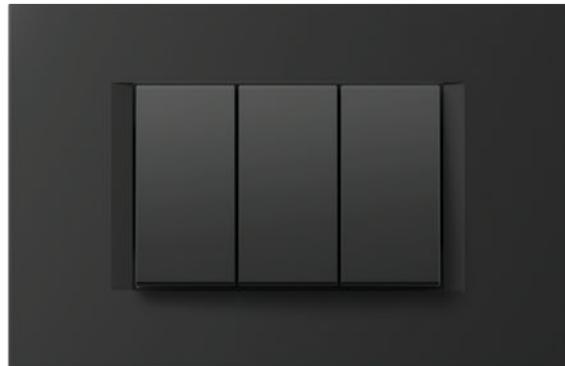osnovni  
basicPW bijela sjajna  
polar whiteES srebrna mat  
elox silverIW bež sjajna  
ivory whiteSB crna mat  
soft touch black


## COVER PLATES LINE OL

dekor  
decor

SG zlatna mat  
sand gold




IB plava mat  
impulse blue

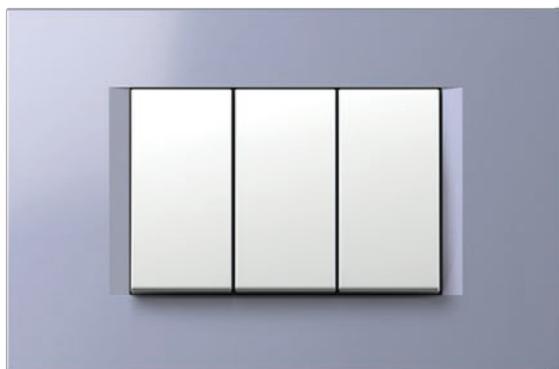

SE kamen smaragd  
stone emerald



NG crna sjajna  
night black

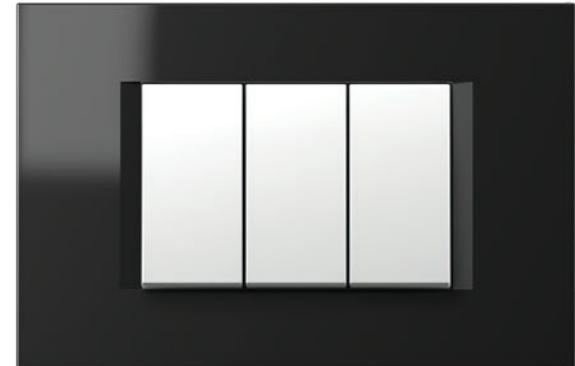


MG zelena mat  
mint green



SW kamen bijeli  
stone white



MODUL

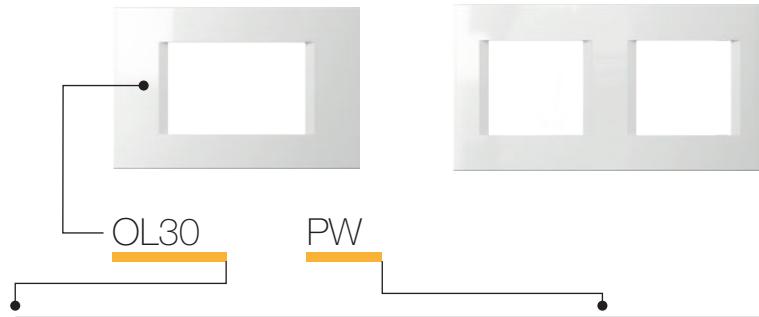

tip type	naziv description	veličina size	boja colour			
OL10	OKVIR LINE COVER PLATE LINE	1/2M	PW PW	bijela sjajna polar white	SG SG	zlatna mat sand gold
OL13	OKVIR LINE COVER PLATE LINE	1/3M	IW IW	bež sjajna ivory white	NB NB	crna sjajna night black
OL20	OKVIR LINE COVER PLATE LINE	2M	ES ES	srebrna mat elox silver	IB IB	plava mat impulse blue
.	.	.	SB SB	crna mat soft touch black	MG MG	zelena mat mint green
.	.	.				



OL20PW	OL20SG
OL20IW	OL20NB
OL20ES	OL20IB
OL20SB	OL20MG
	OL20SE
	OL20SW

## OKVIR LINE 2M

- dekorativni okvir LINE 2M
- sukladno normi EN 60669-1

## COVER PLATE LINE 2M

- decorative cover plate LINE 2M
- in accordance with EN 60669-1




OL24PW	OL24SG
OL24IW	OL24NB
OL24ES	OL24IB
OL24SB	OL24MG
	OL24SE
	OL24SW

## OKVIR LINE 2x2M

- dekorativni okvir LINE 2x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1

## COVER PLATE LINE 2x2M

- decorative cover plate LINE 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1

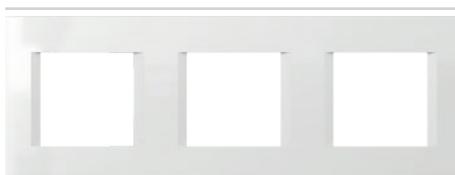

OL26PW	OL26SG
OL26IW	OL26NB
OL26ES	OL26IB
OL26SB	OL26MG
	OL26SE
	OL26SW

## OKVIR LINE 3x2M

- dekorativni okvir LINE 3x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1

## COVER PLATE LINE 3x2M

- decorative cover plate LINE 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1



OL28PW	OL28SG
OL28IW	OL28NB
OL28ES	OL28IB
OL28SB	OL28MG
	OL28SE
	OL28SW

## OKVIR LINE 4x2M

- dekorativni okvir LINE 4x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1

## COVER PLATE LINE 4x2M

- decorative cover plate LINE 4x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1

## COVER PLATES LINE OL



OL30PW  
OL30IW  
OL30ES  
OL30SB

OL30SG  
OL30NB  
OL30IB  
OL30MG  
OL30SE  
OL30SW

## OKVIR LINE 3M

- dekorativni okvir LINE 3M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 3M**  
- decorative cover plate LINE 3M  
- in accordance with EN 60669-1




OL40PW  
OL40IW  
OL40ES  
OL40SB

OL40SG  
OL40NB  
OL40IB  
OL40MG  
OL40SE  
OL40SW

## OKVIR LINE 4M

- dekorativni okvir LINE 4M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 4M**  
- decorative cover plate LINE 4M  
- in accordance with EN 60669-1

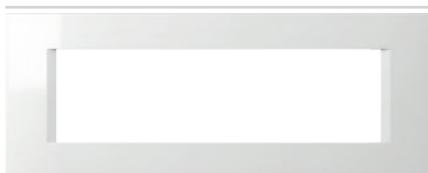

OL70PW  
OL70IW  
OL70ES  
OL70SB

OL70SG  
OL70NB  
OL70IB  
OL70MG  
OL70SE  
OL70SW

## OKVIR LINE 7M

- dekorativni okvir LINE 7M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 7M**  
- decorative cover plate LINE 7M  
- in accordance with EN 60669-1



OL10PW  
OL10IW  
OL10ES  
OL10SB

OL10SG  
OL10NB  
OL10IB  
OL10MG  
OL10SE  
OL10SW

## OKVIR LINE 1/2M

- dekorativni okvir LINE 1/2M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 1/2M**  
- decorative cover plate LINE 1/2M  
- in accordance with EN 60669-1



OL13PW  
OL13IW  
OL13ES  
OL13SB

OL13SG  
OL13NB  
OL13IB  
OL13MG  
OL13SE  
OL13SW

## OKVIR LINE 1/3M

- dekorativni okvir LINE 1/3M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 1/3M**  
- decorative cover plate LINE 1/3M  
- in accordance with EN 60669-1



OL23PW  
OL23IW  
OL23ES  
OL23SB


OL23SG  
OL23NB  
OL23IB  
OL23MG  
OL23SE  
OL23SW

## OKVIR LINE 2/3M

- dekorativni okvir LINE 2/3M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 2/3M**  
- decorative cover plate LINE 2/3M  
- in accordance with EN 60669-1

osnovni  
basic


PW bijela sjajna  
polar white

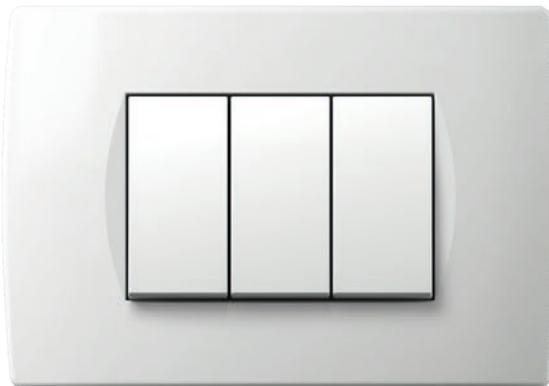


ES srebrna mat  
elox silver



IW bež sjajna  
ivory white

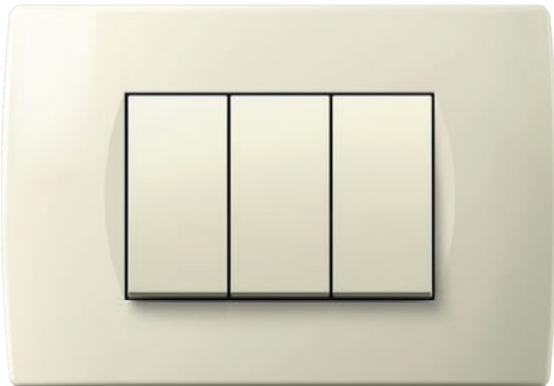


SB crna mat  
soft touch black

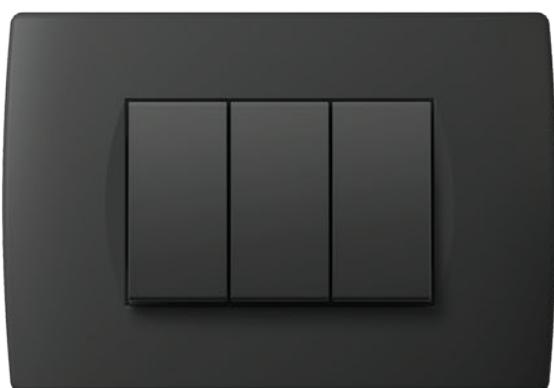

## C O V E R   P L A T E S   S O F T   O S

dekor  
decor

SG zlatna mat  
sand gold

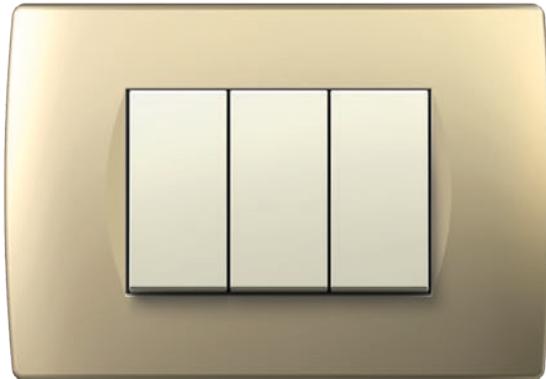


WP smreka  
spruce



WE wenge  
wenge




NG crna sjajna  
night black

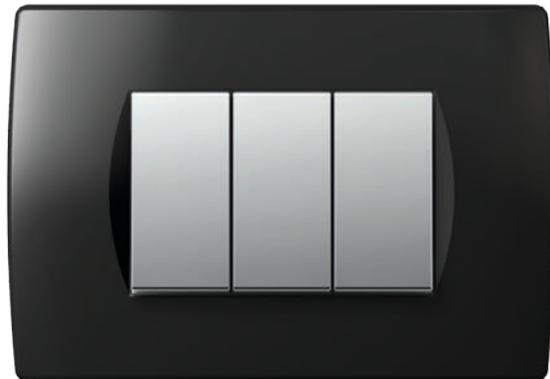

WW orah  
walnut



MODUL

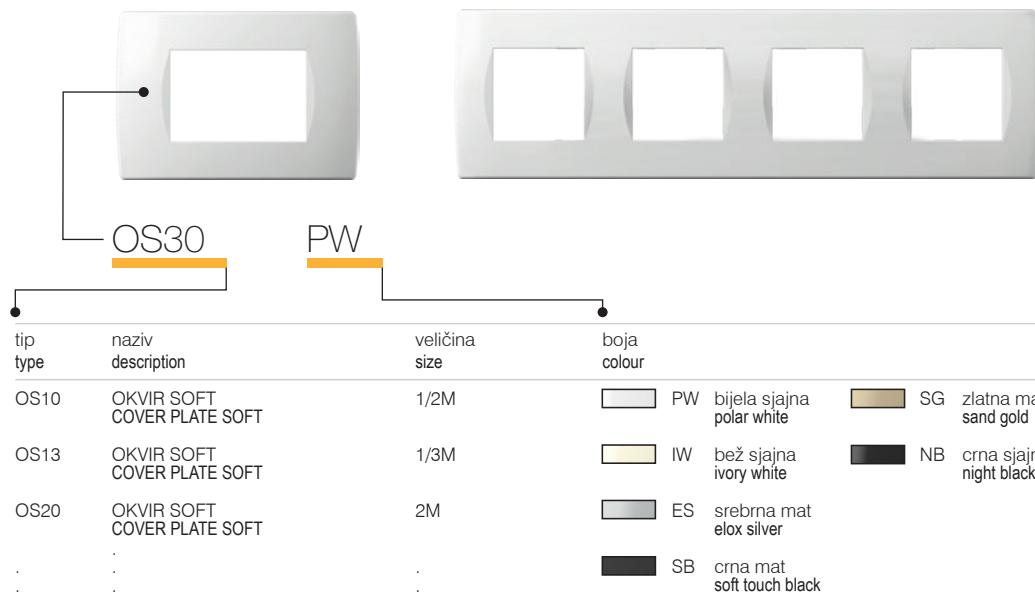

OS20PW  
OS20IW  
OS20ES  
OS20SB

OS20SG  
OS20NB  
OS20WP  
OS20WW  
OS20WE

#### OKVIR SOFT 2M

- dekorativni okvir SOFT 2M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 2M**
- decorative cover plate SOFT 2M
  - in accordance with EN 60669-1



OS24PW  
OS24IW  
OS24ES  
OS24SB

OS24SG  
OS24NB  
OS24WP  
OS24WW  
OS24WE

#### OKVIR SOFT 2x2M

- dekorativni okvir SOFT 2x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 2x2M**
- decorative cover plate SOFT 2x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1



OS26PW  
OS26IW  
OS26ES  
OS26SB

OS26SG  
OS26NB  
OS26WP  
OS26WW  
OS26WE

#### OKVIR SOFT 3x2M

- dekorativni okvir SOFT 3x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 3x2M**
- decorative cover plate SOFT 3x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1



OS28PW  
OS28IW  
OS28ES  
OS28SB

OS28SG  
OS28NB  
OS28WP  
OS28WW  
OS28WE

#### OKVIR SOFT 4x2M

- dekorativni okvir SOFT 4x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 4x2M**
- decorative cover plate SOFT 4x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1

## COVER PLATES SOFT OS



[color swatch]	OS30PW
[color swatch]	OS30IW
[color swatch]	OS30ES
[color swatch]	OS30SB

[color swatch]	OS30SG
[color swatch]	OS30NB
[color swatch]	OS30WP
[color swatch]	OS30WW
[color swatch]	OS30WE

## OKVIR SOFT 3M

- dekorativni okvir SOFT 3M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 3M**
- decorative cover plate SOFT 3M
  - in accordance with EN 60669-1




[color swatch]	OS40PW
[color swatch]	OS40IW
[color swatch]	OS40ES
[color swatch]	OS40SB

[color swatch]	OS40SG
[color swatch]	OS40NB
[color swatch]	OS40WP
[color swatch]	OS40WW
[color swatch]	OS40WE

## OKVIR SOFT 4M

- dekorativni okvir SOFT 4M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 4M**
- decorative cover plate SOFT 4M
  - in accordance with EN 60669-1

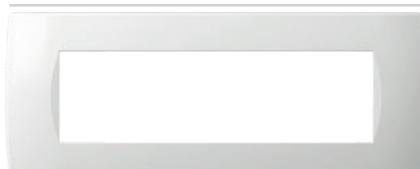

[color swatch]	OS70PW
[color swatch]	OS70IW
[color swatch]	OS70ES
[color swatch]	OS70SB

[color swatch]	OS70SG
[color swatch]	OS70NB
[color swatch]	OS70WP
[color swatch]	OS70WW
[color swatch]	OS70WE

## OKVIR SOFT 7M

- dekorativni okvir SOFT 7M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 7M**
- decorative cover plate SOFT 7M
  - in accordance with EN 60669-1



[color swatch]	OS72PW
[color swatch]	OS72IW
[color swatch]	OS72ES
[color swatch]	OS72SB

[color swatch]	OS70SG
[color swatch]	OS70NB
[color swatch]	OS70WP
[color swatch]	OS70WW
[color swatch]	OS70WE

## OKVIR SOFT 2x7M

- dekorativni okvir SOFT 2x7M s natpisnom pločicom
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 2x7M**
- decorative cover plate SOFT 2x7M with inscription plate
  - in accordance with EN 60669-1



[color swatch]	OS10PW
[color swatch]	OS10IW
[color swatch]	OS10ES
[color swatch]	OS10SB

[color swatch]	OS10SG
[color swatch]	OS10NB
[color swatch]	OS10WP
[color swatch]	OS10WW
[color swatch]	OS10WE

## OKVIR SOFT 1/2M

- dekorativni okvir SOFT 1/2M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 1/2M**
- decorative cover plate SOFT 1/2M
  - in accordance with EN 60669-1



[color swatch]	OS13PW
[color swatch]	OS13IW
[color swatch]	OS13ES
[color swatch]	OS13SB

[color swatch]	OS13SG
[color swatch]	OS13NB
[color swatch]	OS13WP
[color swatch]	OS13WW
[color swatch]	OS13WE

## OKVIR SOFT 1/3M

- dekorativni okvir SOFT 1/3M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 1/3M**
- decorative cover plate SOFT 1/3M
  - in accordance with EN 60669-1



[color swatch]	OS23PW
[color swatch]	OS23IW
[color swatch]	OS23ES
[color swatch]	OS23SB

[color swatch]	OS23SG
[color swatch]	OS23NB
[color swatch]	OS23WP
[color swatch]	OS23WW
[color swatch]	OS23WE

## OKVIR SOFT 2/3M

- dekorativni okvir SOFT 2/3M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 2/3M**
- decorative cover plate SOFT 2/3M
  - in accordance with EN 60669-1

**LASERSKO GRAVIRANJE NA OKVIRIMA**

- lasersko graviranje proizvoljne grafike
- izrada po narudžbi
- prikladno za okvire OL, OS

**LASER PRINT ON COVER PLATES**


- *laser print of any graphics*
- *made on request*
- *suitable for cover plates OL, OS*

**UKRAŠAVANJE OKVIRA**

- tekstura i boje po želji kupca
- izrada po narudžbi
- prikladno za okvire OL, OS

**COVER PLATES DECORATIONS**

- *customised textures and colours*
- *made on request*
- *suitable for cover plates OL, OS*

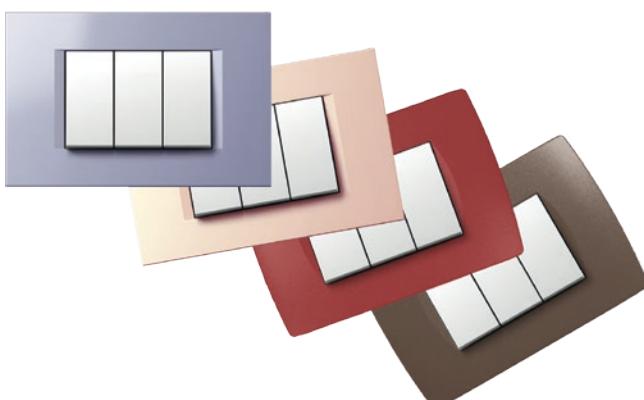

## F R A M E S




**line**  
A x B



**soft**  
A x B




**PURE**  
A x B

**2M**

80 x 80 mm

84 x 84 mm


93 x 90 mm

**2x2M**

151 x 80 mm

155 x 84 mm


164 x 90 mm

**3x2M**

222 x 80 mm


226 x 84 mm

235 x 90 mm

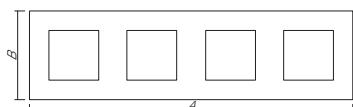**4x2M**

293 x 80 mm


297 x 84 mm

**3M**

122 x 80 mm

122 x 84 mm


134 x 90 mm

**4M**

149 x 80 mm

144 x 84 mm


157 x 90 mm

**7M**


207 x 80 mm

212 x 84 mm

224 x 90 mm

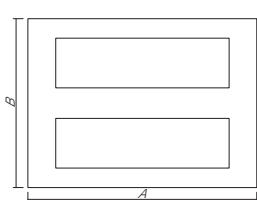
**2x7M**

212 x 158 mm

**1/2M**

80 x 80 mm


84 x 84 mm

**1/3M**

122 x 80 mm

122 x 84 mm

134 x 90 mm


**2/3M**

122 x 80 mm


122 x 84 mm

134 x 90 mm

# K O M B I N A C I J E

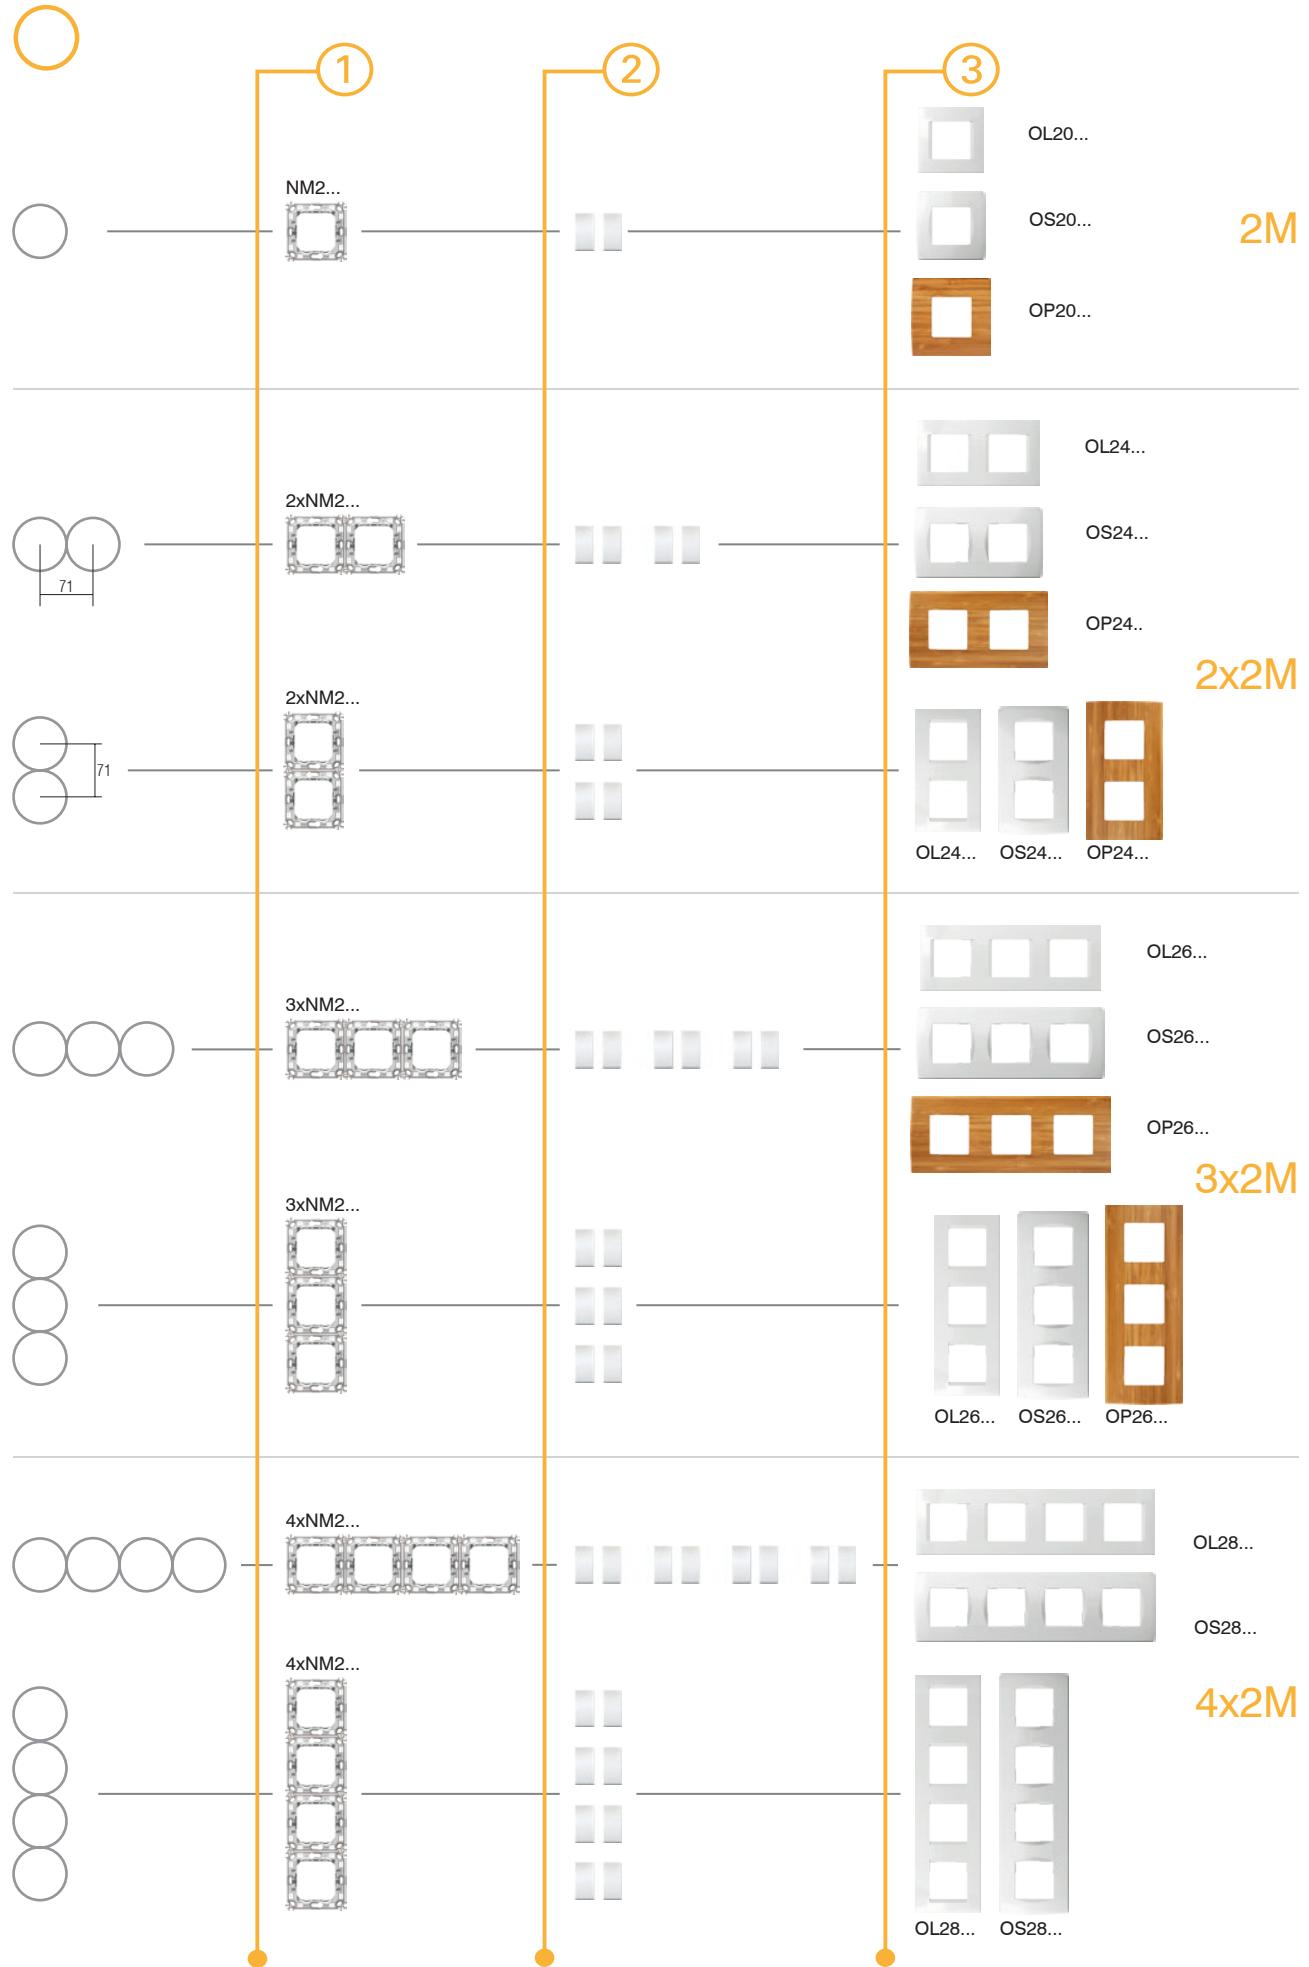

## C O M B I N A T I O N S

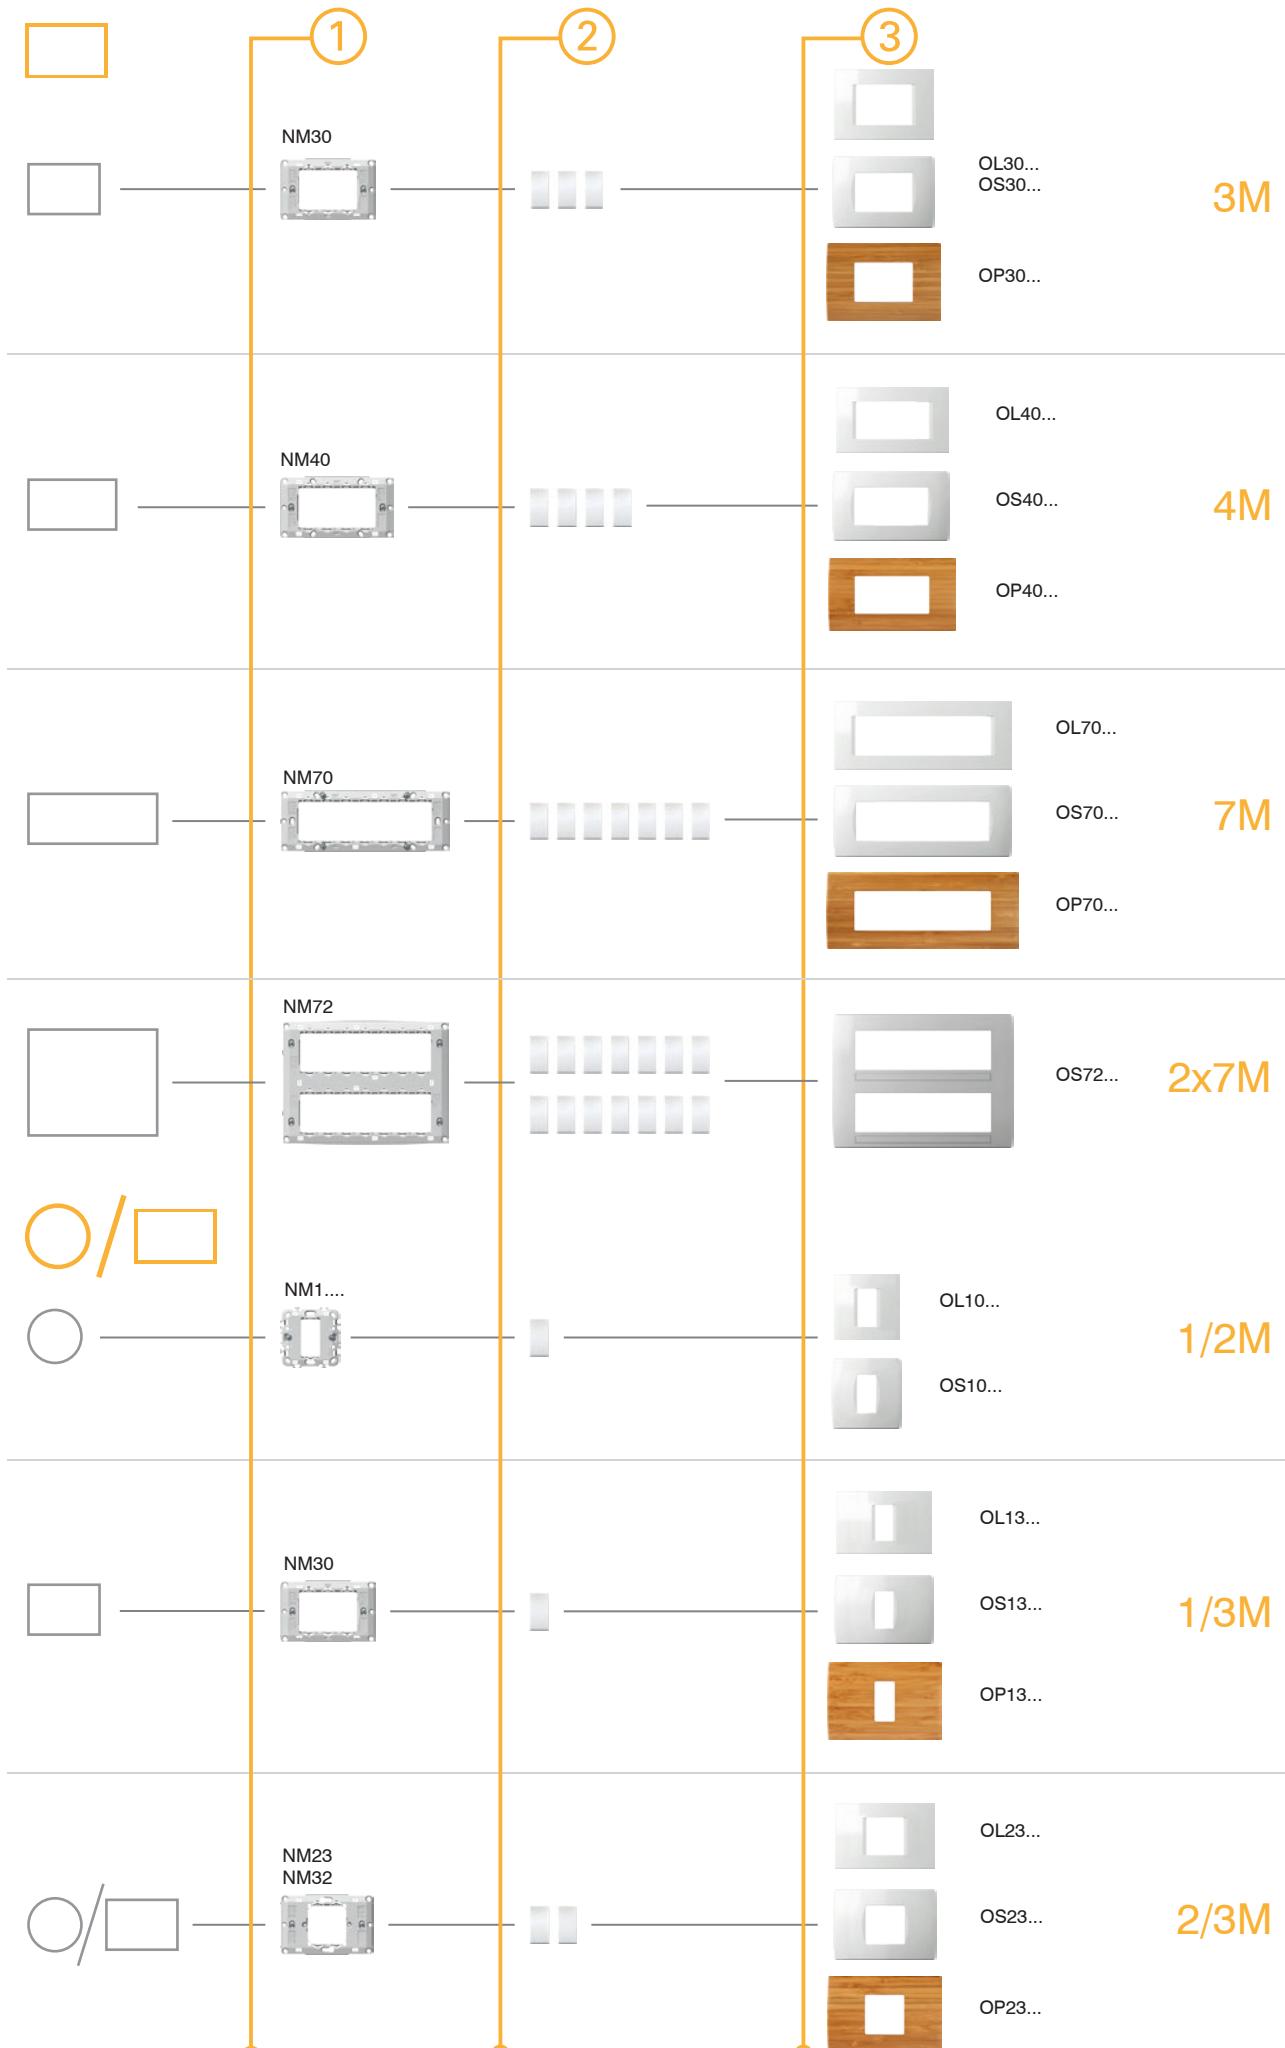




NM30

tip type	naziv description	veličina size
NM10	NOSAČ S NOŽICAMA MOUNTING FRAME WITH CLAWS	1/2M
NM11	NOSAČ BEZ VIJAKA MOUNTING FRAME WITHOUT SCREWS	1/2M
NM20	NOSAČ S NOŽICAMA MOUNTING FRAME WITH CLAWS	2M

**NOSAČ S NOŽICAMA 2M**

NM20

- nosač s nožicama 2M
- za ugradnju u kutije Ø60 (DE..) s nožicama
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1


**MOUNTING FRAME WITH CLAWS 2M**

- mounting frame 2M with claws
- for mounting on boxes Ø60 (DE..) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1



NM21

- nosač 2M bez vijaka i bez nožica
- za ugradnju u kutije Ø60 (HE.., BE..) s vijcima
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITHOUT SCREWS 2M**


- mounting frame 2M without screws and without claws
- for mounting on boxes Ø60 (HE.., BE..) with screws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1



NM24

**NOSAČ METALNI S NOŽICAMA 2M**

- metalni nosač 2M s nožicama - kruta inačica
- za ugradnju u kutije Ø60 (DE..) s nožicama
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME METAL WITH CLAWS 2M**


- metal mounting frame 2M with claws - stiff version
- for mounting on boxes Ø60 (DE..) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1



NM25

**NOSAČ METALNI BEZ VIJAKA 2M**

- metalni nosač 2M bez vijaka i bez nožica – kruta inačica
- za ugradnju u kutije Ø60 (HE.., BE..) s nožicama
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME METAL WITHOUT SCREWS 2M**

- metal mounting frame 2M without screws and without claws - stiff version
- for mounting on boxes Ø60 (HE.., BE..) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM30

**NOSAČ S VIJCIMA 3M**

- nosač 3M s vijcima
- za ugradnju u pravokutne kutije 3M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 3M**

- mounting frame 3M with screws
- for mounting on rectangular boxes 3M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM40

**NOSAČ S VIJCIMA 4M**

- nosač 4M s vijcima
- za ugradnju u pravokutne kutije 4M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 4M**

- mounting frame 4M with screws
- for mounting on rectangular boxes 4M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1





NM70

**NOSAČ S VIJCIMA 7M**

- nosač 7M s vijcima
- za ugradnju u pravokutne kutije 7M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 7M**

- mounting frame 7M with screws
- for mounting on rectangular boxes 7M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1

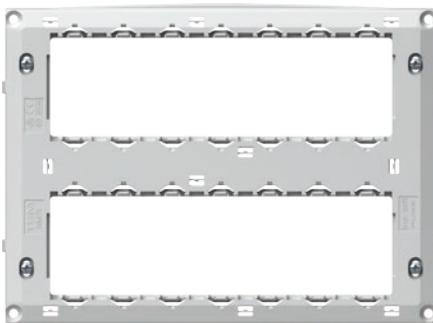


NM72

**NOSAČ S VIJCIMA 2x7M**

- nosač 2x7M s vijcima
- za ugradnju u pravokutne kutije 2x7M
- prikladan za sastavljanje s okvirom SOFT OS72
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 2x7M**

- mounting frame 2x7M with screws
- for mounting on rectangular boxes 2x7M
- suitable for assembling with cover plate SOFT OS72
- in accordance with EN 60669-1

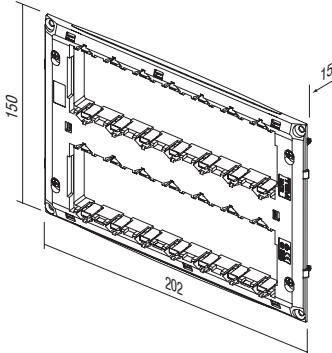




NM10

**NOSAČ S NOŽICAMA 1/2M**

- nosač 1/2M s nožicama
- za ugradnju u kutije Ø60 (DE..) s nožicama
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH CLAWS 1/2M**

- mounting frame 1/2M with claws
- for mounting on boxes Ø60 (DE..) with claws
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1





NM11

**NOSAČ BEZ VIJAKA 1/2M**

- nosač 1/2M bez vijaka i bez nožica
- za ugradnju u kutije Ø60 (HE.., BE..) s vijcima
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITHOUT SCREWS 1/2M**

- mounting frame 1/2M without screws and without claws
- for mounting on boxes Ø60 (HE.., BE..) with screws
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1





NM23

**NOSAČ S NOŽICAMA 2/3M**

- nosač 2/3M s nožicama
- za ugradnju u kutije Ø60 (DE..) s nožicama
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH CLAWS 2/3M**

- mounting frame 2/3M with claws
- for mounting on boxes Ø60 (DE..) with claws
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM32

**NOSAČ S VIJCIMA 2/3M**

- nosač 2/3M s vijcima
- za ugradnju u pravokutne kutije 3M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 2/3M**


- mounting frame 2/3M with screws
- for mounting on rectangular boxes 3M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1



M O U N T I N G   F R A M E S   N M

E O D U L

**TEM**

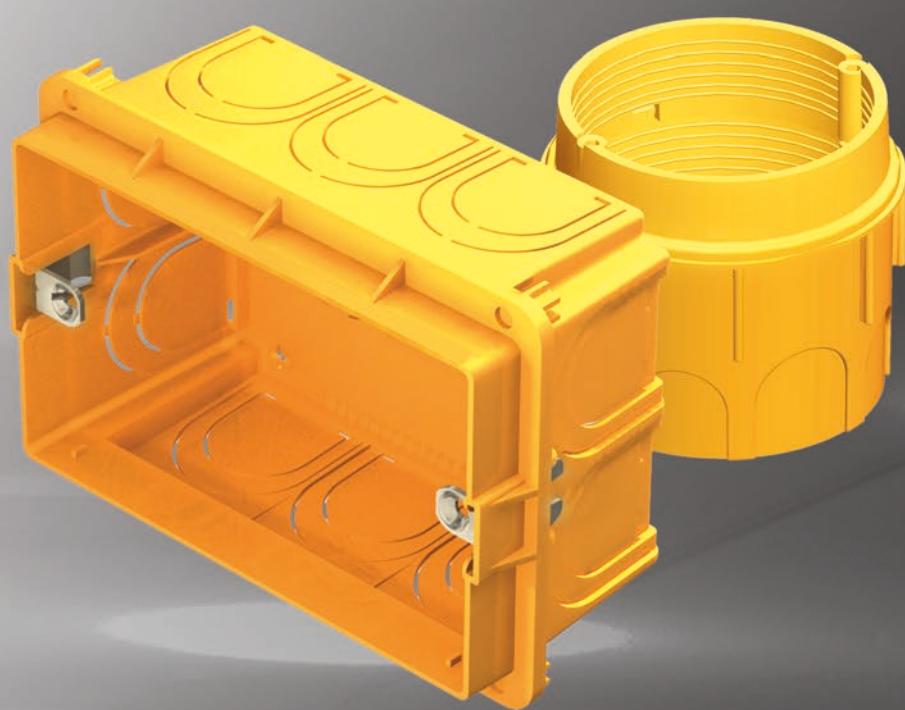

KATALOG /  
CATALOGUE

# KUTIJE



**KUTIJE OKRUGLE**  
*ROUND BOXES*



126

**KUTIJE PRAVOKUTNE**  
*RECTANGULAR BOXES*



134

**KUTIJE PRIKLJUČNE**  
*JUNCTION BOXES*




142

**PRIBOR ZA OŽIČENJE**  
*WIRING ACCESSORIES*




144



DE12



HE11



BE10

tip type	naziv description	veličina size
DE10	KUTIJA OKRUGLA ZA ZID OD OPEKE <i>ROUND BOX BRICK</i>	SM60-01
HE10	KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE <i>ROUND BOX HOLLOW WALL</i>	SM68X40
BE10	KUTIJA OKRUGLA ZA BETON <i>ROUND BOX CONCRETE</i>	
.	.	.
.	.	.
.	.	.


## KUTIJA OKRUGLA ZA ZID OD OPEKE SM60-01



DE10

- Ø60, dubina 40mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1
- bez halogena

*ROUND BOX BRICK SM60-01*  
 - Ø60, depth 40mm  
 - 650°C, 500V~  
 - in accordance with IEC 60670-1  
 - halogen free




## KUTIJA OKRUGLA ZA ZID OD OPEKE DUBOKA SM60-06



DE11

- Ø60, dubina 60mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1
- bez halogena

*ROUND BOX BRICK DEEP SM60-06*  
 - Ø60, depth 60mm  
 - 650°C, 500V~  
 - in accordance with IEC 60670-1  
 - halogen free



## VEZNI ŠLAN SM60-03



DE30

- za okomito povezivanje kutija SM60-06 ili SM60-01 na razmaku od 91 mm
- sukladno normi IEC 60670-1
- bez halogena

*COMBI-CLIP SM60-03*  
 - for vertical fitting of boxes SM60-06 or SM60-01 on distance 91 mm  
 - in accordance with IEC 60670-1  
 - halogen free




## VEZNI ŠLAN SM60-04



DE31

- za vodoravno povezivanje kutija SM60-06 ili SM60-01 na razmaku od 71 mm
- sukladno normi IEC 60670-1
- bez halogena

*COMBI-CLIP SM60-04*  
 - for horizontal fitting of boxes SM60-06 or SM60-01 on distance 71mm  
 - in accordance with IEC 60670-1  
 - halogen free



## R O U N D

## B O X E S

## K U T I J E




DE12

## KUTIJA OKRUGLA ZA ZID OD OPEKE MD65-46

- Ø65, dubina 46mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1

## ROUND BOX BRICK MD65-46

- Ø65, depth 46mm
- 650°C, 500V~
- in accordance with IEC 60670-1




DE13

## KUTIJA OKRUGLA ZA ZID OD OPEKE DUBOKA MD65-60

- Ø65/60, dubina 62mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1

## ROUND BOX BRICK DEEP MD65-60

- Ø65/60, depth 62mm
- 650°C, 500V~
- in accordance with IEC 60670-1




DE14

## PRODŽETAK ZA MD65-46

- Ø65/60, dubina 17mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1

## ADDITIONAL PIECE FOR MD65-46

- Ø65/60, depth 17mm
- 650°C, 500V~
- in accordance with IEC 60670-1




DE32

- za povezivanje kutija MD65 na razmaku od 71mm
- sukladno normi IEC 60670-1

## COMBI-CLIP MD65-71

- for fitting of boxes MD65 on distance 71mm
- in accordance with IEC 60670-1




DE33

## VEZNI ŠLAN MD65-91

- za povezivanje kutija MD65 na razmaku od 91mm
- sukladno normi IEC 60670-1

## COMBI-CLIP MD65-91

- for fitting of boxes MD65 on distance 91mm
- in accordance with IEC 60670-1




DE20

## POKLOPAC KUTIJE ZAŠTITNI 60

- zaštitni poklopac za kutiju Ø60 za DE13, DE14
- sukladno normi IEC 60670-1
- zaštita kutije tijekom žbuknja

## BOX COVER PROTECTIVE 60

- protective cover for box Ø60 for DE13, DE14
- in accordance with IEC 60670-1
- box protection during plastering




DE21

## POKLOPAC KUTIJE ZAŠTITNI 65

- zaštitni poklopac za kutiju Ø65 za DE12
- sukladno normi IEC 60670-1
- zaštita kutije tijekom žbuknja

## BOX COVER PROTECTIVE 65

- protective cover for box Ø65 for DE12
- in accordance with IEC 60670-1
- box protection during plastering




DE22

## POKLOPAC KUTIJE DEKORATIVNI SM60

- dekorativni poklopac za kutije Ø60
- sukladno normi IEC 60670-1
- bez halogena

## BOX COVER DECORATIVE SM60

- decorative cover for boxes Ø60
- in accordance with IEC 60670-1
- halogen free

















cigla / brick

upute za ugradnju /  
assembly instructions


DE10,11

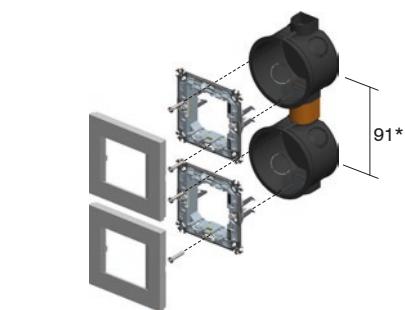razmak između kutija /  
distance between boxes: 71mmrazmak između kutija /  
distance between boxes: 91mm

DE12,13

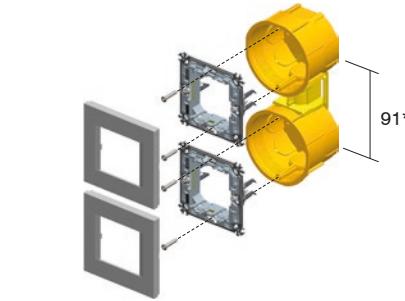\* za okvire PURE, min. razmak između  
kutija je 100 mm\* for PURE cover plates the minimum distance between  
boxes is 100mm

R O U N D      B O X E S

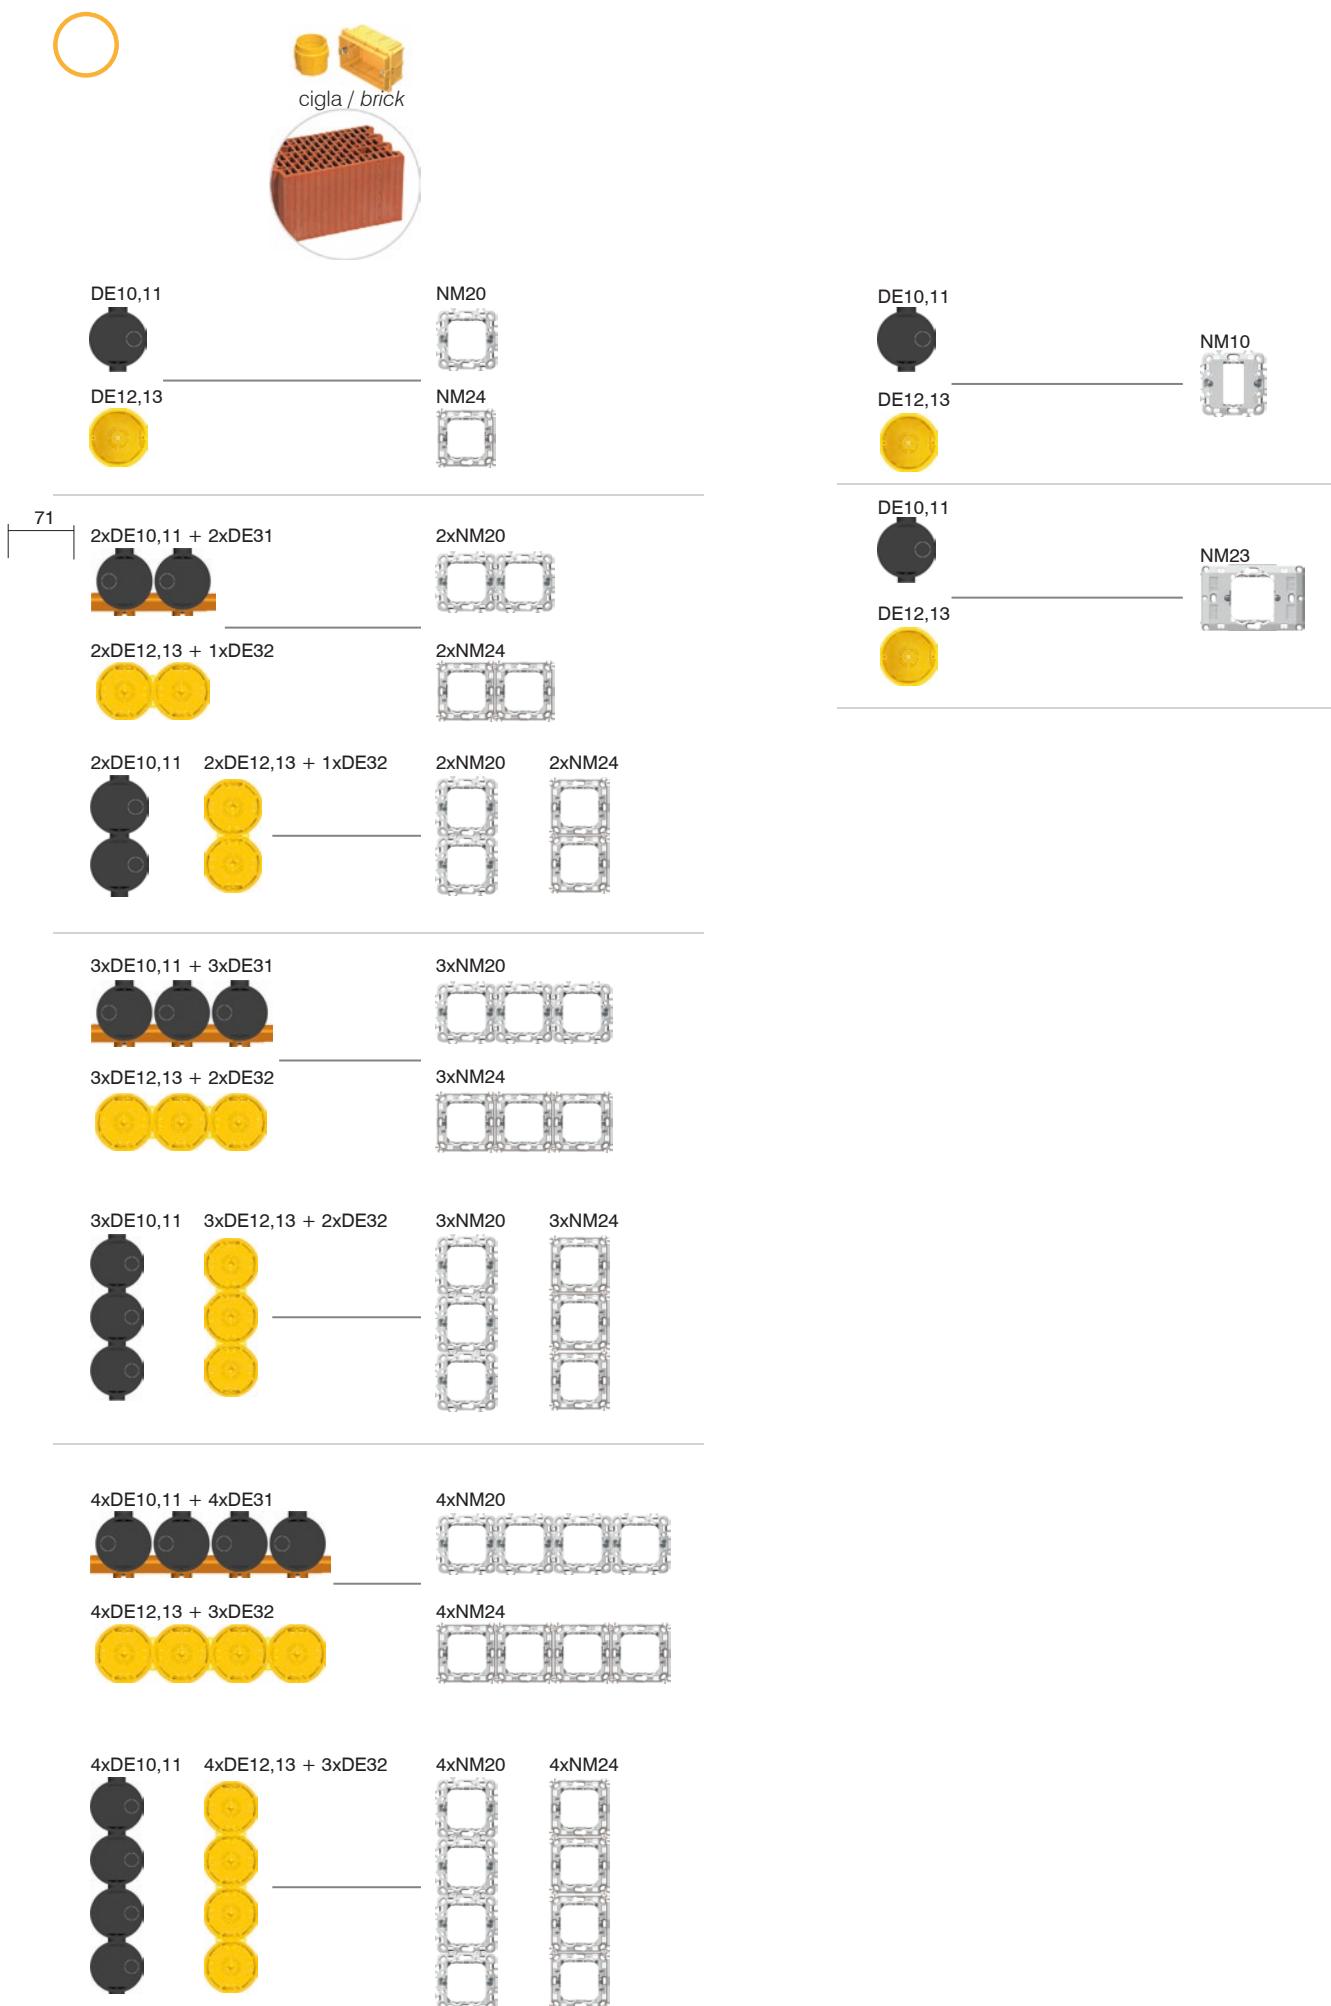

## KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE SM68x40




HE10

- Ø60, dubina 40mm
- ugradni promjer Ø68
- 850°C, 400V ~
- sukladno normi IEC 60670-1
- ugradnja s nožicama
- bez halogena

## ROUND BOX HOLLOW WALL SM68x40

- Ø60, depth 40mm
- cutting hole Ø68
- 850°C, 400V~
- in accordance with IEC 60670-1
- mounting with claws
- halogen free



## KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE SM68x55




HE11


- Ø60, dubina 55mm
- ugradni promjer Ø68
- 850°C, 400V ~
- sukladno normi IEC 60670-1
- ugradnja s nožicama
- bez halogena

## ROUND BOX HOLLOW WALL SM68x55

- Ø60, depth 55mm
- cutting hole Ø68
- 850°C, 400V~
- in accordance with IEC 60670-1
- mounting with claws
- halogen free



## KUTIJA OKRUGLA ZA BETON




BE10

- Ø60 mm, dubina 49 mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1

## ROUND BOX CONCRETE

- Ø60mm, depth 49mm
- 650°C, 500V~
- in accordance with IEC 60670-1



## KUTIJA OKRUGLA ZA BETON DUBOKA




BE11

- Ø60 mm, dubina 58mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1

## ROUND BOX CONCRETE DEEP

- Ø60mm, depth 58mm
- 650°C, 500V~
- in accordance with IEC 60670-1



## NOSAČ KUTIJE ZA BETON




BE20

- za učvršćivanje doze dilatacijskim profilom BM82 u suprotni zid
- sukladno normi IEC 60670-1

## COUNTER BOX SUPPORT CONCRETE

- to support concrete boxes with discance profile BM82 for extreme loads
- in accordance with IEC 60670-1



## UVODNICA ZA KUTIJU ZA BETON 16




BE21

- za učvršćivanje instalacijske cijevi
- sukladno normi IEC 60670-1

## PIPE STOPPER CONCRETE BOX 16

- for firming installation pipe to box
- in accordance with IEC 60670-1




## R O U N D

## B O X E S

šuplji zidovi / hollow walls





beton / concrete




upute za ugradnju /  
assembly instructions


HE10,11









razmak između kutija /  
distance between boxes: 71mm

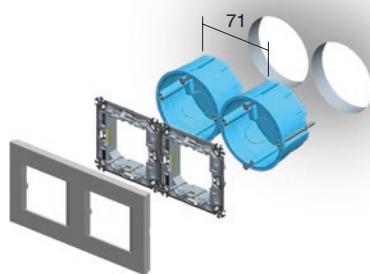

razmak između kutija /  
distance between boxes: 91mm

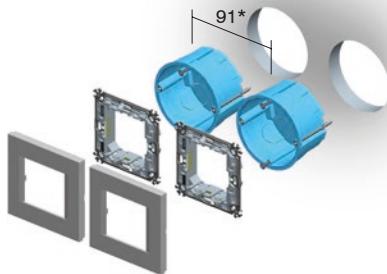

BE10

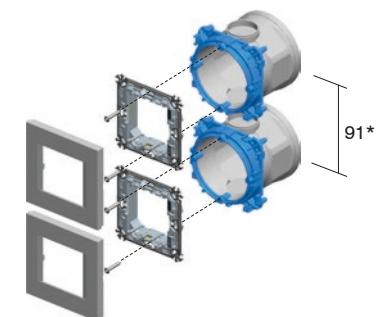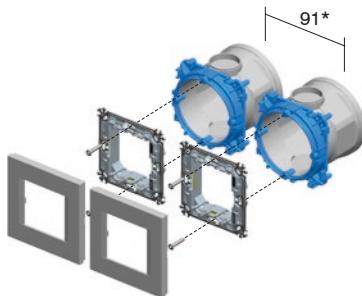

\* za okvire PURE, min. razmak između kutija je 100 mm


\* for PURE cover plates the minimum distance between boxes is 100mm

K U T I J E

šupljivi zidovi / hollow walls



beton / concrete



HE10,11



BE10,11



NM21



NM25



2M

HE10,11



BE10,11



1/2M

HE10,11



BE10,11



2/3M

2x2M

2xHE10,11



2xBE10,11



2xNM21




2xNM25



2xHE10,11 2xBE10,11



2xHE10,11



2xNM21 2xNM25

3xHE10,11



3xBE10,11



3xNM21



3xNM25




3x2M

3xHE10,11 3xBE10,11



3xNM21 3xNM25



4xHE10,11



4xBE10,11



4xNM21



4xNM25




4x2M


4xHE10,11 4xBE10,11



4xNM21 4xNM25




## R O U N D      B O X E S

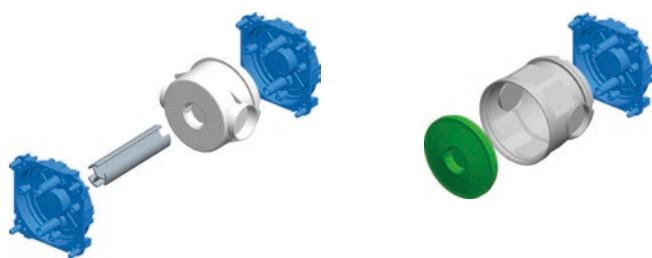


upute za ugradnju /  
assembly instructions


1

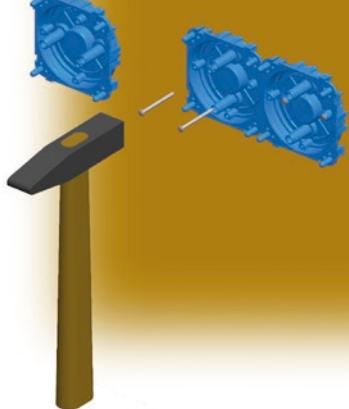

2

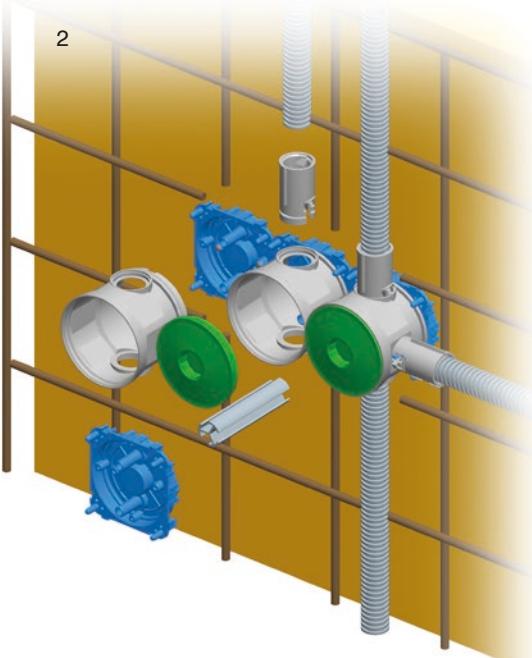


3

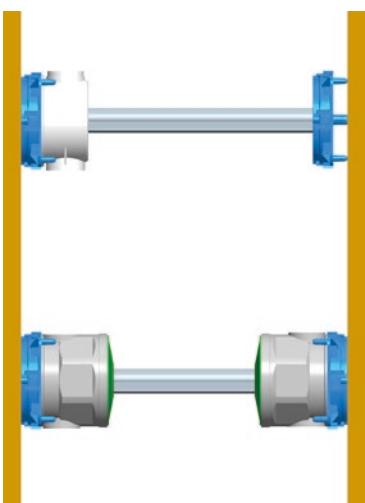

4




K U T - J E



DM30



HM30



BM30

tip type	naziv description	veličina size
DM30	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE <i>RECTANGULAR BOX BRICK</i>	PM3
HM30	KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM3 <i>RECTANGULAR BOX HOLLOW WALL</i>	
BM30	KUTIJA PRAVOKUTNA ZA BETON <i>RECTANGULAR BOX CONCRETE</i>	BM3
.	.	.
.	.	.
.	.	.


## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM3



DM30

- veličina 3M, dubina 49 mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

*RECTANGULAR BOX BRICK PM3*  
 - size 3M, depth 49mm  
 - 650°C, 400V~  
 - in accordance with IEC 60670-1  
 - halogen free




## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM3-65



DM31

- veličina 3M, dubina 65mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

*RECTANGULAR BOX BRICK PM3-65*  
 - size 3M, depth 65mm  
 - 650°C, 400V~  
 - in accordance with IEC 60670-1  
 - halogen free




## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM4



DM40

- veličina 4M, dubina 49 mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

*RECTANGULAR BOX BRICK PM4*  
 - size 4M, depth 49mm  
 - 650°C, 400V~  
 - in accordance with IEC 60670-1  
 - halogen free




## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM4-65



DM41


- veličina 4M, dubina 65mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

*RECTANGULAR BOX BRICK PM4-65*  
 - size 4M, depth 65mm  
 - 650°C, 400V~  
 - in accordance with IEC 60670-1  
 - halogen free



## RECTANGULAR BOXES

KUTIJE





DM70

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM7

- veličina 7M, dubina 49 mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX BRICK PM7

- size 7M, depth 49mm
- 650°C, 400V~
- in accordance with IEC 60670-1
- halogen free




DM71

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM7-65

- veličina 7M, dubina 65mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX BRICK PM7-65

- size 7M, depth 65mm
- 650°C, 400V~
- in accordance with IEC 60670-1
- halogen free





DM72

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM72-65

- veličina 2x7M, dubina 64mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1

## RECTANGULAR BOX BRICK PM72-65

- size 2x7M, depth 64mm
- 650°C, 400V~
- in accordance with IEC 60670-1

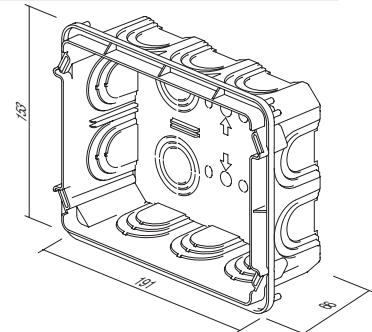




DM80

## VEZNI ČLAN KUTIJE PM

- za okomito (B) i vodoravno (A) povezivanje kutija PM3, PM4 i PM7

## DISTANCE PIECE FOR BOX PM

- for vertical (B) and horizontal (A) fitting of boxes PM3, PM4 and PM7

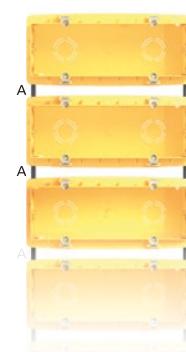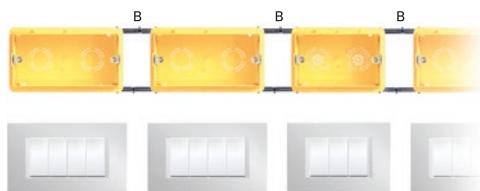

## POKLOPAC KUTIJE ZAŠTITNI PM3




DM33

- zaštitni poklopac za kutiju PM3
- sukladno normi IEC 60670-1
- bez halogena
- zaštita kutije tijekom žbukanja

## BOX COVER PROTECTIVE PM3

- protective cover for box PM3
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



## POKLOPAC KUTIJE DEKORATIVNI PM3




DM34

- dekorativni poklopac za kutije 3M
- vijci priloženi
- sukladno normi IEC 60670-1
- bez halogena

## BOX COVER DECORATIVE PM3

- decorative cover for boxes 3M
- screws are included
- in accordance with IEC 60670-1
- halogen free



## POKLOPAC KUTIJE ZAŠTITNI PM4




DM43

- zaštitni poklopac za kutiju PM4
- sukladno normi IEC 60670-1
- bez halogena
- zaštita kutije tijekom žbukanja

## BOX COVER PROTECTIVE PM4

- protective cover for box PM4
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



## POKLOPAC KUTIJE DEKORATIVNI PM4




DM44


- dekorativni poklopac za kutije 4M
- vijci priloženi
- sukladno normi IEC 60670-1
- bez halogena

## BOX COVER DECORATIVE PM4

- decorative cover for boxes 4M
- screws are included
- in accordance with IEC 60670-1
- halogen free



## POKLOPAC KUTIJE ZAŠTITNI PM7




DM73

- zaštitni poklopac za kutiju PM7
- sukladno normi IEC 60670-1
- bez halogena
- zaštita kutije tijekom žbukanja

## BOX COVER PROTECTIVE PM7

- protective cover for box PM7
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



## POKLOPAC KUTIJE DEKORATIVNI PM7




DM74

- dekorativni poklopac za kutije 7M
- vijci priloženi
- sukladno normi IEC 60670-1
- bez halogena

## BOX COVER DECORATIVE PM7

- decorative cover for boxes 7M
- screws are included
- in accordance with IEC 60670-1
- halogen free




## RECTANGULAR BOXES

## POKLOPAC KUTIJE DEKORATIVNI PM72

DM75

- dekorativni poklopac za kutije 2x7M
- vijci priloženi
- sukladno normi IEC 60670-1

**BOX COVER DECORATIVE PM72**  
- decorative cover for boxes 2x7M  
- screws are included  
- in accordance with IEC 60670-1

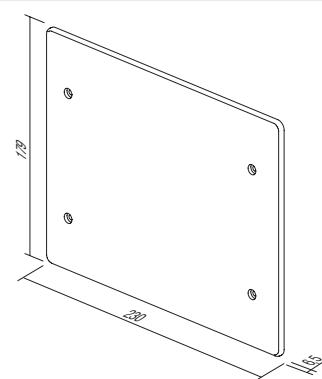

K U T I J E




HM30

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM3

- veličina 3M, dubina 49 mm
- ugradni promjer 2xØ68/45mm
- 850°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX HOLLOW WALL VM3

- size 3M, depth 49mm
- cutting hole 2xØ68/45mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM40

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM4

- veličina 4M, dubina 49 mm
- ugradni promjer 2xØ68/70mm
- 850°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX HOLLOW WALL VM4

- size 4M, depth 49mm
- cutting hole 2xØ68/70mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM70

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM7

- veličina 7M, dubina 49 mm
- ugradni promjer 2xØ68/120mm
- 850°C, 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX HOLLOW WALL VM7

- size 7M, depth 49mm
- cutting hole 2xØ68/120mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM72

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM72

- veličina 2x7M, dubina 63mm
- 850°C, 400V ~
- sukladno normi IEC 60670-1

## RECTANGULAR BOX HOLLOW WALL VM72

- size 2x7M, depth 63mm
- 850°C, 400V~
- in accordance with IEC 60670-1

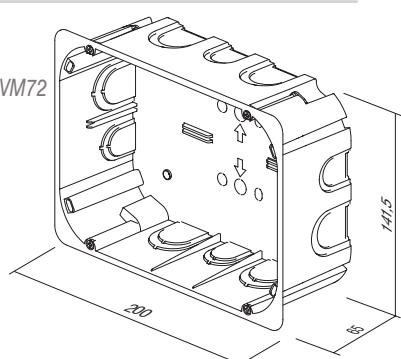

## RECTANGULAR BOXES

KUTIJE




BM30

## PRAVOKUTNA KUTIJA ZA BETON BM3

- veličina 3M, dubina 60mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1

## RECTANGULAR BOX CONCRETE BM3

- size 3M, depth 60mm
- 650°C, 400V~
- in accordance with IEC 60670-1





BM40

## PRAVOKUTNA KUTIJA ZA BETON BM4

- veličina 4M, dubina 60mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1

## RECTANGULAR BOX CONCRETE BM4

- size 4M, depth 60mm
- 650°C, 400V~
- in accordance with IEC 60670-1




BM70

## PRAVOKUTNA KUTIJA ZA BETON BM7

- veličina 7M, dubina 60mm
- 650°C, 400V ~
- sukladno normi IEC 60670-1

## RECTANGULAR BOX CONCRETE BM7

- size 7m, depth 60mm
- 650°C, 400V~
- in accordance with IEC 60670-1





BM80

## PRIČVRŠNI KOMBI-DRŽAČ BM

- za brzo pričvršćivanje pravokutnih kutija BM na armiranu betonsku šipku
- prikladno za šipku promjera do Ø8 mm

## FIXING COMBI-CLIP BM

- for fast fixation of BM rectangular boxes on reinforcing bar
- suitable for bar diameter up to Ø8mm




BM82


## VEZNI PROFIL ZA KUTIJE BM

- za podupiranje kutija BM s odgovarajućom kutijom na nasuprotnom zidu
- duljina l = 1 m, promjer Ø20 mm

## DISTANCE PROFILE FOR BOXES BM

- to support boxes BM with counter box support on opposite wall
- length l=1m, diameter Ø20mm




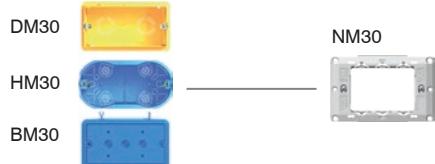


3M




4M

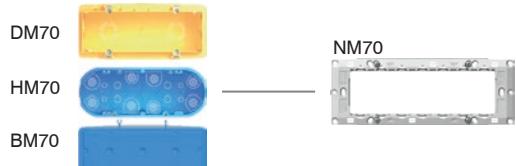

7M

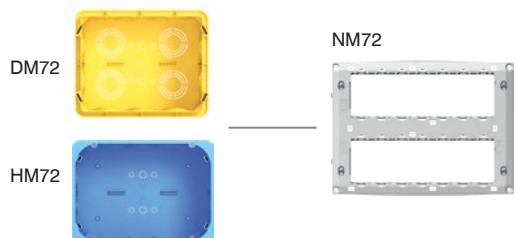


2x7M

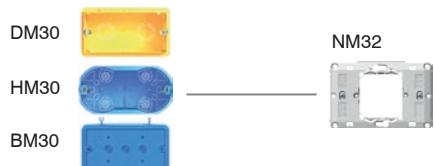


2/3M

## RECTANGULAR BOXES

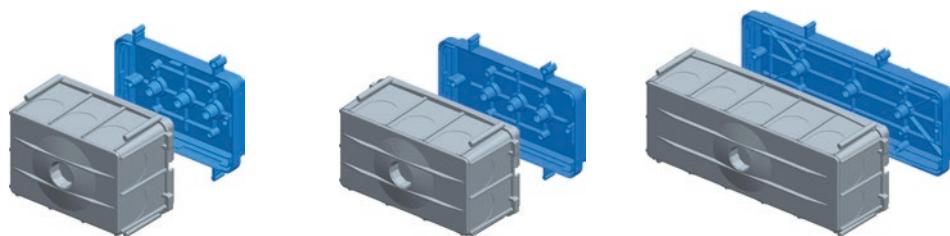

upute za ugradnju /  
assembly instructions

K U T - J E

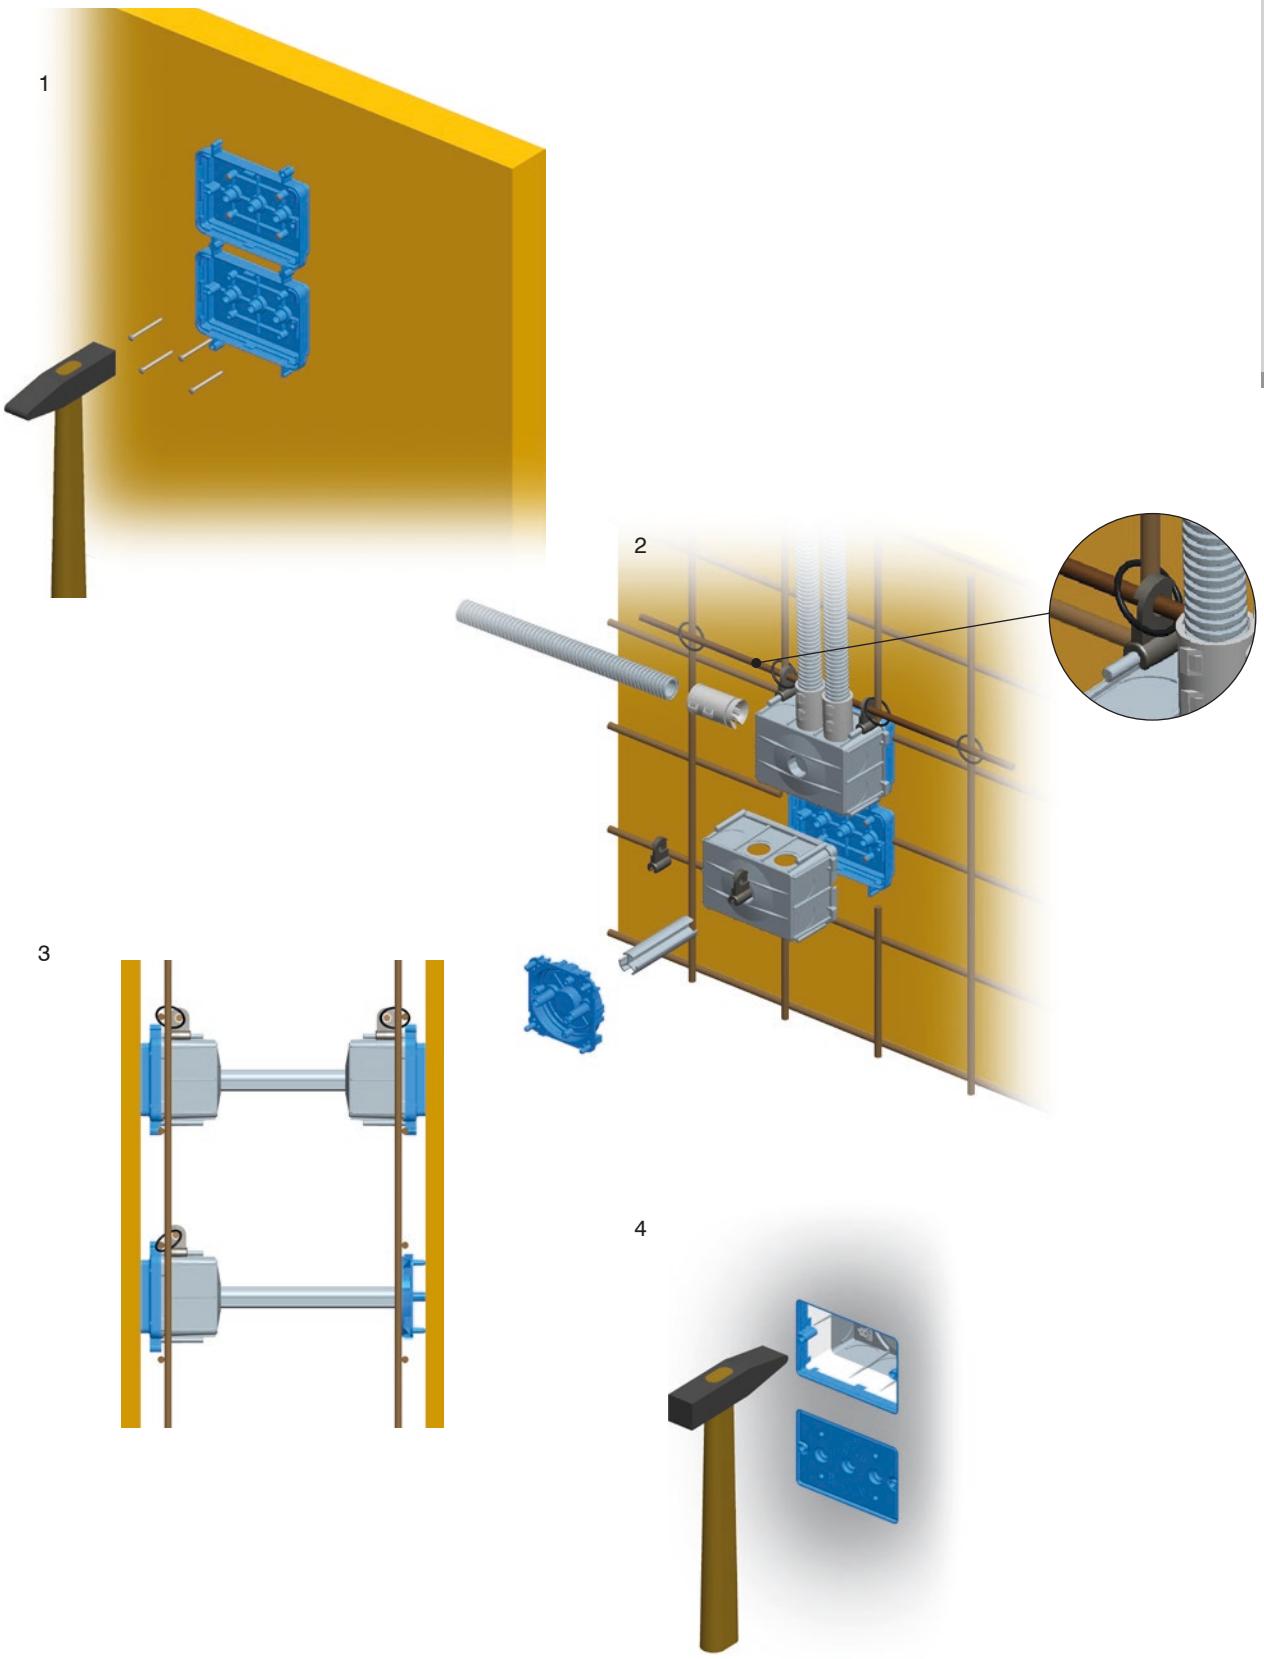




DW10

## KUTIJA PRIKLJUČNA OKRUGLA ZA ZID OD OPEKE DSM78

- Ø78, dubina 40mm
- 650°C, 500V ~
- sukladno normama IEC 60670-1 i IEC 60670-22
- bez halogena



## CONNECTION ROUND BOX BRICK DSM78


- Ø78, depth 40mm
- 650°C, 500V~
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free



HW10

## KUTIJA PRIKLJUČNA OKRUGLA ZA ŠUPLJE ZIDOVE SM78x45

- Ø78, dubina 45mm
- ugradnji promjer Ø80
- 850°C, 400V ~
- sukladno normama IEC 60670-1 i IEC 60670-22
- ugradnja s nožicama
- bez halogena



## CONNECTION ROUND BOX HOLLOW WALL SM78x45


- Ø78, depth 45mm
- cutting hole Ø80
- 850°C, 400V~
- in accordance with IEC 60670-1 and IEC 60670-22
- mounting with claws
- halogen free



DE23

## POKLOPAC KUTIJE DEKORATIVNI SM78

- dekorativni poklopac za kutije Ø78
- sukladno normama IEC 60670-1 i IEC 60670-22
- bez halogena



## BOX COVER DECORATIVE SM78


- decorative cover for boxes Ø78
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free



DE24

## POKLOPAC KUTIJE ZAŠTITNI 78

- zaštitni poklopac za kutije Ø78
- sukladno normama IEC 60670-1 i IEC 60670-22
- bez halogena



## BOX COVER PROTECTIVE 78


- protective cover for box Ø78
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free



HW20

## KUTIJA PRIKLJUČNA ČETVRTASTA ZA ZID OD OPEKE SM105x105

- veličina 105x105mm, dubina 50mm
- ugradnja u rupu prema priloženoj šablioni
- 850°C, 400V ~
- sukladno normama IEC 60670-1 i IEC 60670-22
- ugradnja s nožicama
- bez halogena



## CONNECTION SQUARE BOX BRICK SM105x105

- size 105x105mm, depth 50mm
- cutting hole according to attached template
- 850°C, 400V~
- in accordance with IEC 60670-1 and IEC 60670-22
- mounting with claws
- halogen free

## R E C T A N G U L A R   B O X E S

K U T - J E



UW10

tip type	naziv description	tehnicički podaci technical data	veličina size	boja colour
UW10	JEDNOREDNE STEZALJKE 1 ROW TERMINAL BLOCKS	2x2.5mm <sup>2</sup>	10P	<input checked="" type="checkbox"/> TS transparentna transparent
UW11	JEDNOREDNE STEZALJKE 1 ROW TERMINAL BLOCKS	2x4mm <sup>2</sup>	10P	<input type="checkbox"/> CO boja colour
UW12	JEDNOREDNE STEZALJKE 1 ROW TERMINAL BLOCKS	2x6mm <sup>2</sup>	10P	<input type="checkbox"/> WH bijela white
.	.	.	.	<input type="checkbox"/> GY siva grey
.	.	.	.	
.	.	.	.	


#### JEDNOREDNE STEZALJKE ZATVORENE



- 450V~; 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>  
- termoplast PC, prozirne  
- broj polova: 10

1 ROW TERMINAL BLOCKS CLOSED  
- 450V~, 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>  
- thermoplast PC, transparent  
- number of poles: 10

UW10TS	(NS12)	2x2.5mm <sup>2</sup>	10P
UW11TS	(NS12)	2x4mm <sup>2</sup>	10P
UW12TS	(NS12)	2x6mm <sup>2</sup>	10P



	A	B	C	D
2x2.5 □	110	17.5	17.5	11
2x4 □	128	21	19	12.5
2x6 □	146	21.5	22	15


#### JEDNOREDNE STEZALJKE



- 450V~; 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>  
- termoplast PA  
- dostupne u raznim bojama  
- broj polova: 12


1 ROW TERMINAL BLOCKS  
- 450V~, 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>  
- thermoplast PA  
- available in different colours  
- number of poles: 12

UW15CO	(NS12)	2x2.5mm <sup>2</sup>	12P
UW16CO	(NS12)	2x4mm <sup>2</sup>	12P
UW17CO	(NS12)	2x6mm <sup>2</sup>	12P



	A	B	C	D
2x2.5 □	110	16.4	9	10
2x4 □	118.8	19	10	10
2x6 □	129.8	21.3	11	11.8


#### DVOREDNE STEZALJKE



- 450V~; 1.5mm<sup>2</sup> ÷ 16mm<sup>2</sup>  
- termoplast PA, bijele  
- broj polova: 12

2 ROW TERMINAL BLOCKS  
- 450V~, 1.5mm<sup>2</sup> ÷ 16mm<sup>2</sup>  
- thermoplast PA, white  
- number of poles: 12


UW20WH	(P7)	2.5-4.0mm <sup>2</sup>	12P
UW21WH	(P9)	4.0-6.0mm <sup>2</sup>	12P
UW22WH	(P12)	6.0-10mm <sup>2</sup>	12P
UW23WH	(P14)	16mm <sup>2</sup>	12P



	A	B	C	D	E
2.5-4 □	118	17	20	10	8
4-6 □	129.2	19	22	11	8
6-10 □	147	23	25	12.5	9
16 □	177	29	30	15	13

**BEZVIJČANE REDNE STEZALJKE****PLUG-IN WIRE CONNECTORS**

- 24A 450V~, termoplast PA, sive
- broj polova: 3÷8
- bezvijčani kontakti  $0,5 \div 1,5 \text{ mm}^2$ , za tvrde žice
- sukladno normi EN 60998-1



UW40GY	PC153	1.5mm <sup>2</sup>	3P
UW41GY	PC155	1.5mm <sup>2</sup>	5P
UW42GY	PC158	1.5mm <sup>2</sup>	8P

	A	B	C
12	18	9	
17	18	9	
26	18	9	

**BEZVIJČANE REDNE STEZALJKE****PLUG-IN WIRE CONNECTORS**

- 24A 450V~, termoplast PA, sive
- broj polova: 3÷5
- bezvijčani kontakti  $1,5 \div 2,5 \text{ mm}^2$ , za tvrde žice
- sukladno normi EN 60998-1




UW45GY	PC253	2.5mm <sup>2</sup>	3P
UW46GY	PC254	2.5mm <sup>2</sup>	4P
UW47GY	PC255	2.5mm <sup>2</sup>	5P

	A	B	C
14	19	9	
17	19	9	
21	19	9	

**BEZVIJČANE REDNE STEZALJKE****PLUG-IN WIRE CONNECTOR**

- 24A 450V~, termoplast PA, sive
- broj polova: 2 (tvrdi žica) + 1 (meki žica)
- bezvijčani kontakti  $1,5 \div 2,5 \text{ mm}^2$
- sukladno normi EN 60998-1



UW50WH	PC302	2.5mm <sup>2</sup>	2/1P
--------	-------	--------------------	------

**TEM**



KATALOG /  
CATALOGUE

# distribucija



KUĆIŠTA CUBO IP20 AC  
BOXES CUBO IP20 AC



148

KUĆIŠTA CUBO IP55 AQ  
BOXES CUBO IP55 AQ



149

PARAPETNI KANALI ALUMINIJ MA  
TRUNKING SYSTEM ALUMINIUM MA



150

PODNE KUTIJE MT  
FLOOR BOXES MT




155

RAZDJELNICI MO  
DISTRIBUTION BOARDS MO







158

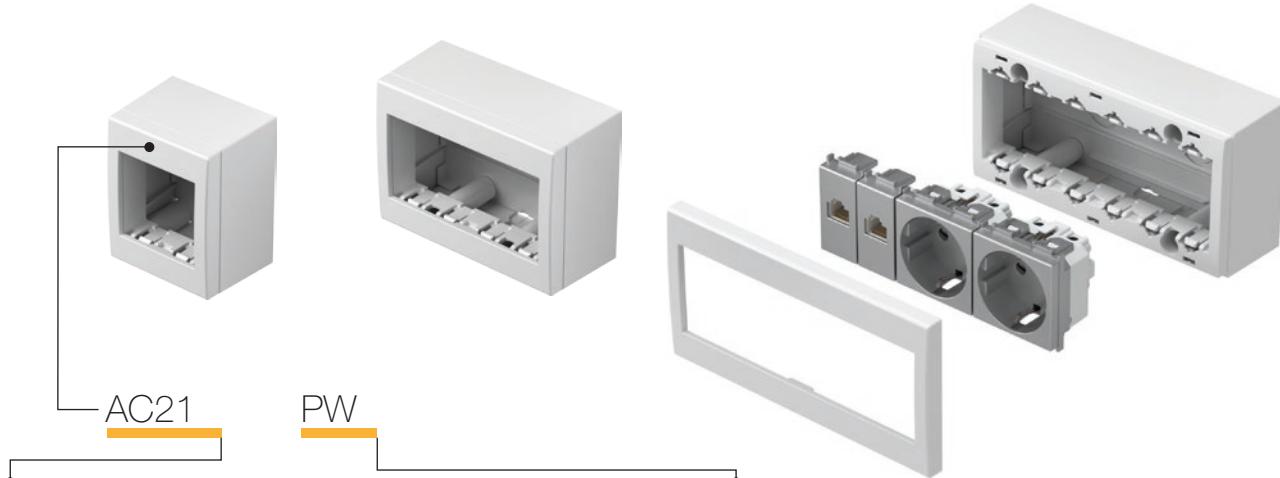

tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
AC11	NADŽBUKNA KUTIJA SA STRAŽNJIM POKLOPCEM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	1M	<input type="checkbox"/> PW bijela sjajna polar white
AC21	NADŽBUKNA KUTIJA SA STRAŽNJIM POKLOPCEM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	2M	<input checked="" type="checkbox"/> ES srebrna mat elox silver
AC41	NADŽBUKNA KUTIJA SA STRAŽNJIM POKLOPCEM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	4M	<input type="checkbox"/> IW bež sjajna ivory white

## KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 1M

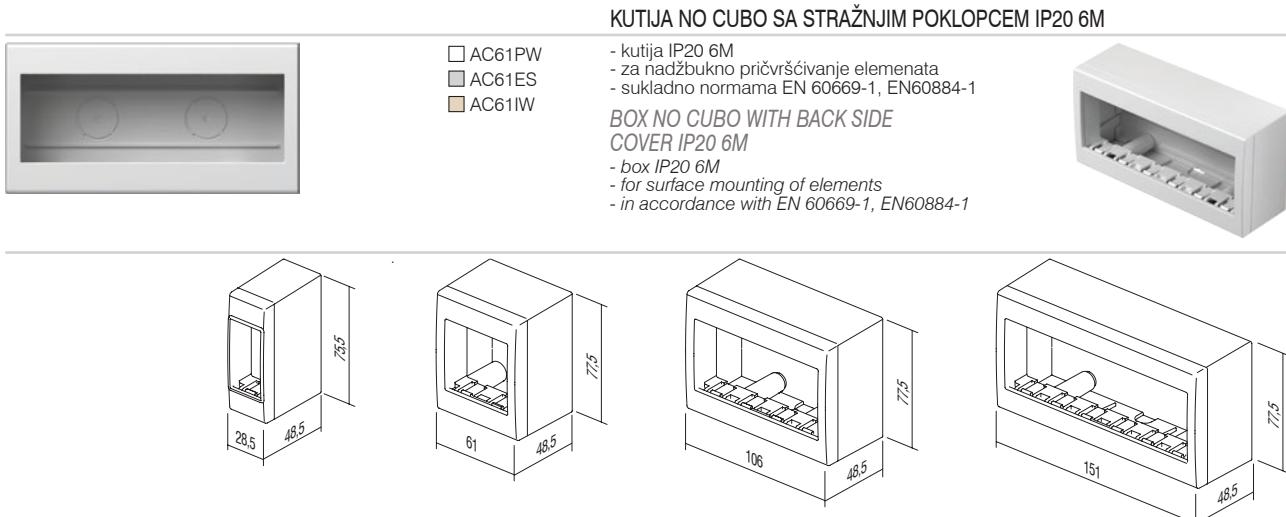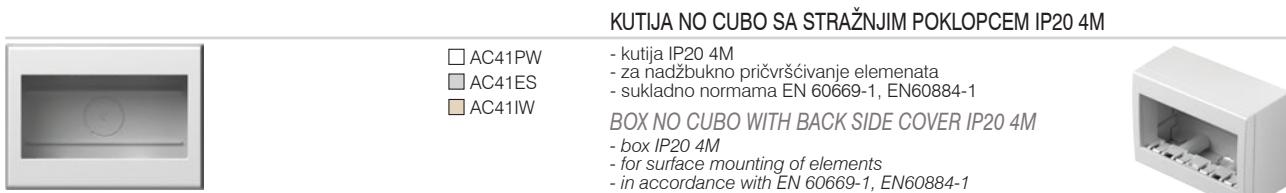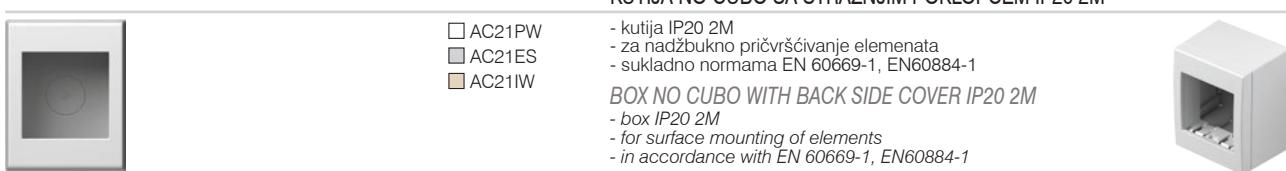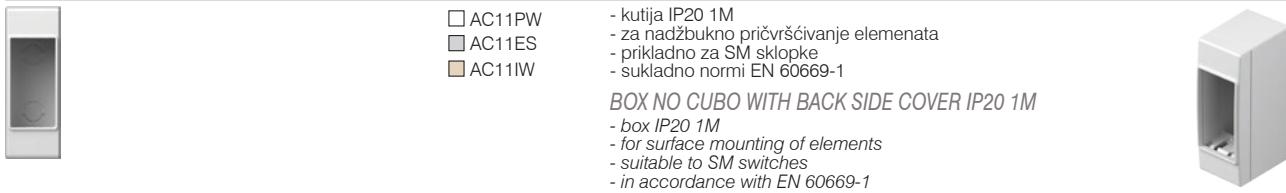

## B O X E S C U B O I P 5 5 A Q



tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
AQ20	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	2M	<input type="checkbox"/> PW bijela sjajna polar white
AQ22	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	2x2M	<input checked="" type="checkbox"/> GY siva grey
AQ30	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	3M	
AQ31	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	3M	



AQ20PW  
 AQ20GY

## KUTIJA NO CUBO IP55 2M

- kutija IP55 2M
- za nadžbukno pričvršćivanje
- IP55 za ugradnju u vlažnom prostoru
- sukladno normama CEI 23-48, EN 60670



AQ22PW  
 AQ22GY

## KUTIJA NO CUBO IP55 2x2M

- kutija IP55 2x2M
- za nadžbukno pričvršćivanje
- IP55 za ugradnju u vlažnom prostoru
- sukladno normama CEI 23-48, EN 60670



AQ30PW  
 AQ30GY

## KUTIJA NO CUBO IP55 3M





- kutija IP55 3M
- za nadžbukno pričvršćivanje
- IP55 za ugradnju u vlažnom prostoru
- sukladno normama CEI 23-48, EN 60670




AQ31PW  
 AQ31GY

## KUTIJA PO CUBO IP55 3M

- kutija IP55 3M
- za podžbukno pričvršćivanje
- IP55 za ugradnju u vlažnom prostoru
- sukladno normama CEI 23-48, EN 60670



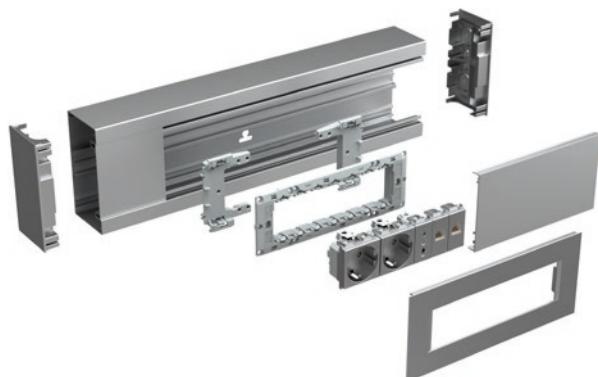

RT20

ES

tip type	naziv description	veličina size	boja colour
RT10	ADAPTER MA 92 ADAPTER MA 92	/	<input checked="" type="checkbox"/> ES srebrna mat <i>elox silver-mat</i>
RT12	POKLOPAC MA 92 COVER PLATE MA 92	2/3M	<input type="checkbox"/> PW bijela mat (RAL 9016) <i>white-mat</i>
RT14	POKLOPAC MA 92 COVER PLATE MA 92	4M	
.	.	.	

#### ADAPTER MA 92




RT10

- adapter za pričvršćivanje nosača 2/3M, 4M ili 7M na kanal MA bez kutije
- za svaki su nosač potrebna dva adaptéra
- sukladno normi EN 50085-1

#### ADAPTER MA 92

- adapter for fixing mounting frames 2/3M, 4M or 7M on MA trunking without box
- each mounting frame needs two adapters
- in accordance with EN 50085-1



#### POKLOPAC MA 92 2/3M




RT12ES  
 RT12PW

- dekorativni poklopac MA 2/3M
- sukladno normi EN 50085-1

#### COVER PLATE MA 92 2/3M

- decorative cover plate MA 2/3M
- in accordance with EN 50085-1



#### POKLOPAC MA 92 4M




RT14ES  
 RT14PW


- dekorativni poklopac MA 4M
- sukladno normi EN 50085-1

#### COVER PLATE MA 92 4M

- decorative cover plate MA 4M
- in accordance with EN 50085-1



#### POKLOPAC MA 92 7M




RT17ES  
 RT17PW

- dekorativni poklopac MA 7M
- sukladno normi EN 50085-1

#### COVER PLATE MA 92 7M

- decorative cover plate MA 7M
- in accordance with EN 50085-1







RT20ES  
 RT20PW

#### OSNOVA KANALA MA 130x65

- osnova kanala od ekstrudiranog aluminija
- visina 130 mm, duljina 2 m
- DIN tračnica 35 mm na dnu
- sukladno normi EN 50085-1

#### TRUNKING BASE MA 130x65

- trunking base from extruded aluminium
- height 130mm, lenght 2m
- DIN - rail 35mm shape on bottom
- in accordance with EN 50085-1





RT21ES  
 RT21PW

#### OSNOVA KANALA MA 165x65

- osnova kanala od ekstrudiranog aluminija
- visina 165mm, duljina 2 m
- DIN tračnica 35 mm na dnu
- sukladno normi EN 50085-1

#### TRUNKING BASE MA 165x65

- trunking base from extruded aluminium
- height 165mm, lenght 2m
- DIN - rail 35mm shape on bottom
- in accordance with EN 50085-1

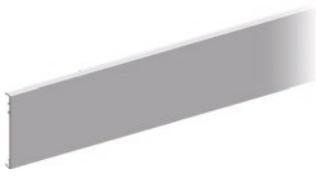


RT25ES  
 RT25PW

#### POKLOPAC KANALA MA 92

- poklopac kanala od ekstrudiranog aluminija
- visina 92mm, duljina 2 m
- sukladno normi EN 50085-1

#### FRONT COVER MA 92

- front cover from extruded aluminium
- height 92mm, lenght 2m
- in accordance with EN 50085-1




RT30

#### PREGRADA MA 43

- pregrada od ekstrudiranog polimera
- dubina 43 mm, duljina 2 m
- sukladno normi EN 50085-1

#### CABLE SHELF MA 43

- cable shelf from extruded polymer
- depth 43mm, lenght 2m
- in accordance with EN 50085-1




RT31

#### PREGRADA MA 43 AL

- pregrada od ekstrudiranog aluminija
- dubina 43 mm, duljina 2 m
- sukladno normi EN 50085-1

#### CABLE SHELF MA 43 AL

- cable shelf from extruded aluminium
- depth 43mm, lenght 2m
- in accordance with EN 50085-1




RT32

#### PREGRADA MA 43 AL DVOSTRUKA

- dvostruka pregrada od ekstrudiranog aluminija
- dubina 43 mm, duljina 2 m
- sukladno normi EN 50085-1

#### CABLE SHELF MA 43 AL DOUBLE

- double cable shelf from extruded aluminium
- depth 43mm, lenght 2m
- in accordance with EN 50085-1






**ZAVRŠNI ELEMENT MA 130x65**

RT35ES  
 RT35PW

- završni element od polimera  
- visina 130mm  
- sukladno normi EN 50085-1

**STOP END MA 130x65**

- stop end element from polymer  
- height 130mm  
- in accordance with EN 50085-1




**ZAVRŠNI ELEMENT MA 165x65**

RT36ES  
 RT36PW

- završni element od metala  
- visina 165mm  
- sukladno normi EN 50085-1

**STOP END MA 165x65**

- stop end element from metal  
- height 165mm  
- in accordance with EN 50085-1




RT38

**SET SPOJNI ELEMENT MA 65**

- spojni element od polimera  
- set sadrži 2 spojna elementa i vijke  
- sukladno normi EN 50085-1

**SET JOINING PIECE MA 65**

- joining piece from polymer  
- set contains two pieces and screws  
- in accordance with EN 50085-1




**UNIVERZALNI KUT MA 130x65**

RT40ES  
 RT40PW

- univerzalni kutni element  
- visina 130mm  
- sukladno normi EN 50085-1

**UNIVERSAL CORNER MA 130x65**

- universal corner element  
- height 130mm  
- in accordance with EN 50085-1




**UNIVERZALNI KUT MA 165x65**

RT41ES  
 RT41PW

- univerzalni kutni element  
- visina 165mm  
- sukladno normi EN 50085-1

**UNIVERSAL CORNER MA 165x65**

- universal corner element  
- height 165mm  
- in accordance with EN 50085-1




RT42

**ELEMENT ZA UZEMLJENJE MA 2x A6.3**

- element za uzemljenje osnove kanala i poklopca  
- sukladno normi EN 50085-1

**EARTHING PIECE MA 2x A6.3**


- earthing piece for earthing of trunking base  
and front cover  
- in accordance with EN 50085-1



## TRUNKING SYSTEM ALUMINIUM

distribucija

## L-KOMAD ELEMENT MA 130x65




- RT43ES  
 RT43PW


- univerzalni L-komad od aluminija
- visina 130 mm, duljina 400mm
- sukladno normi EN 50085-1

## L-BEND MA 130x65

- universal L bend element from aluminium
- height 130mm, lenght 400mm
- in accordance with EN 50085-1



## L-KOMAD ELEMENT MA 165x65




- RT44ES  
 RT44PW


- univerzalni L-komad od aluminija
- visina 165mm, duljina 400mm
- za povezivanje na MA 130x65
- sukladno normi EN 50085-1

## L-BEND MA 165x65

- universal L bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 130x65
- in accordance with EN 50085-1



## T-KOMAD MA 130x65




- RT45ES  
 RT45PW


- univerzalni T-komad od aluminija
- visina 130 mm, duljina 400mm
- sukladno normi EN 50085-1

## T-BEND MA 130x65

- universal T bend element from aluminium
- height 130mm, lenght 400mm
- in accordance with EN 50085-1



## T-KOMAD MA 165x65





- RT46ES  
 RT46PW

- univerzalni T-komad od aluminija
- visina 165mm, duljina 400mm
- za povezivanje na MA 130x65
- sukladno normi EN 50085-1

## T-BEND MA 165x65

- universal T bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 130x65
- in accordance with EN 50085-1



MA parapetni kanali temelje se na modularnom sustavu s kombinacijama elemenata veličine 2M, 4M ili 7M

MA trunking is based on modular system making 2M, 4M or 7M combinations of elements

Modul sadrži specijalne elemente pripremljene za brzu instalaciju

In Modul we provide special elements for quick installation

Adapter MA omogućuje točno postavljanje bez dodatnog napora

With Adapter MA exact positioning without extra effort is provided

Montaža bez kutije znači više prostora za kablove, DIN tračnica ima oblik sukladan normi EN 60715



Mounted without box means more space for cables, DIN-rail base shape EN-60715

**NOSAČ STUPIĆA MA JEDNOSTRUKI 130x65**

- RT50ES  
 RT50PW

**FIXING PLATE MA SINGLE 130x65**


- nosač za pričvršćivanje kanala MA130 na podu i/ili na stropu
- sukladno normi EN 50085-1
- *fixing plate for fixing trunking base MA130 on the floor and/or on the ceiling*
- *in accordance with EN 50085-1*

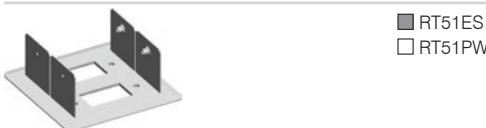**NOSAČ STUPIĆA MA DVOSTRUKI 130x65**

- RT51ES  
 RT51PW

**FIXING PLATE MA DOUBLE 130x65**


- nosač za pričvršćivanje dva kanala MA130 na podu i/ili na stropu
- sukladno normi EN 50085-1
- *fixing plate for fixing two trunking bases MA130 on the floor and/or on the ceiling*
- *in accordance with EN 50085-1*

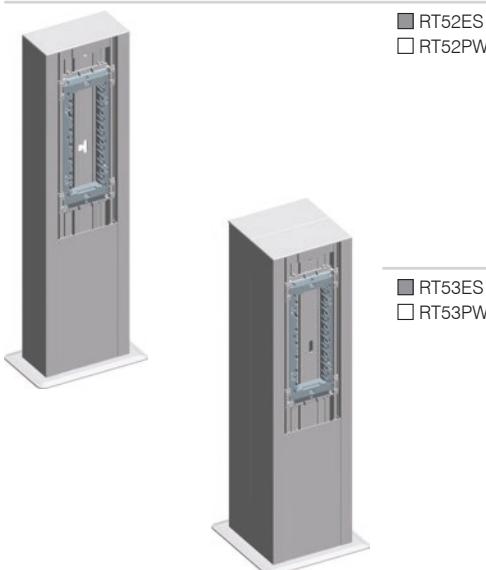**STUPIĆ MA 130x65x500**

- RT52ES  
 RT52PW

**SERVICE POST MA 130x65x500**

- stupić MA
- visina 500mm
- nosač 7M ugrađen
- sukladno normi EN 50085-1
- *service post MA*
- *height 500mm*
- *mounting frame 7M included*
- *in accordance with EN 50085-1*

**STUPIĆ MA DVOSTRUKI 130x130x500**

- RT53ES  
 RT53PW


**SERVICE POST MA DOUBLE 130x130x500**

- stupić MA dvostruki
- visina 500mm
- nosači 7M ugrađeni
- sukladno normi EN 50085-1
- *service post MA double*
- *height 500mm*
- *mounting frames 7M included*
- *in accordance with EN 50085-1*

Cable intersection mm <sup>2</sup>	Poprečni presjek vodiča / Cable cross-section (mm <sup>2</sup> )				
	1 vodič / 1 wire	2 vodiča / 2 wires	3 vodiča / 3 wires	4 vodiča / 4 wires	5 vodiča / 5 wires
1,5	44	111	121	144	169
2,5	49	133	157	169	211
4	58	169	183	211	256
6	68	196	225	256	307

Kapacitet parapetnog kanala / Trunk capacity				
Kanal / Trunk	MA 130x65 prazan / empty	MA 130x65 s Modul sklopkama i utičnicama / with Modul switches and sockets	MA 165x65 prazan / empty	MA 130x65 s Modul sklopkama i utičnicama / with Modul switches and sockets
kapaciteta capacity	7600 mm <sup>2</sup>	5500 mm <sup>2</sup>	9900 mm <sup>2</sup>	7800 mm <sup>2</sup>
max ø	54 mm	2x42 mm	54 mm	2x42 mm



## F L O O R   B O X E S   M T

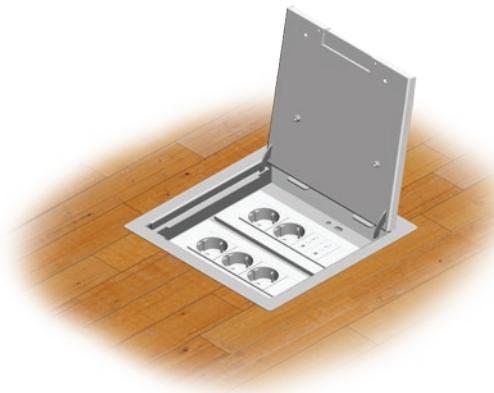

RB33

tip type	naziv description	tehnički podaci technical data
RB30	PODNA KUTIJA <i>FLOOR BOX</i>	MT 7
RB31	SPOJNA PRIRUBNICA PODNE KUTIJE MT 7 <i>FLOOR BOX FLANGE</i>	
RB33	PODNA KUTIJA <i>FLOOR BOX</i>	MT 14
.	.	.
.	.	.
.	.	.

	RB30	RB33	RB36	RB40	RB43	RB46
a	170	260	350	170	260	350
b	260	260	260	260	260	260
X	140	230	320	140	230	320
Y	230	230	230	230	230	230

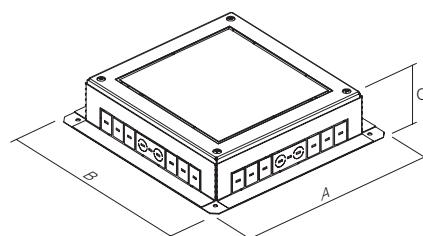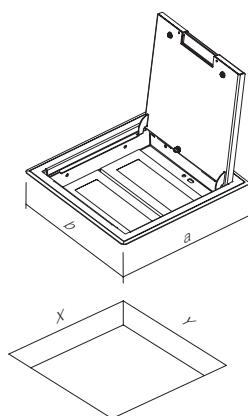

	RB31	RB34	RB37	RB41	RB44	RB47
A	270	360	450	270	360	450
B	360	360	360	360	360	360
C	95-125	95-125	95-125	120-150	120-150	120-150

**PODNA KUTIJA MT 7**

RB30

- podna kutija MT 7
- metalna, srebrne boje RAL 9006
- nosač MODUL 7M ugrađen
- ugradne dimenzije 140x230 mm, dubina min. 95 mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX MT 7**

- *floor box MT 7*
- *metal, colour silver RAL 9006*
- *mounting frame MODUL 7M included*
- *mounting dimensions 140x230mm, depth min 95mm*
- *floor lining thickness up to 10mm*
- *in accordance with EN 50085-1 and EN 50085-2-2*


**PODNA KUTIJA MT 7 H = 88mm**

RB40

- podna kutija MT 7
- metalna, srebrne boje RAL 9006
- nosač MODUL 7M ugrađen
- ugradne dimenzije 140x230 mm, dubina min. 120mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX MT 7 H=88mm**

- *floor box MT 7*
- *metal, colour silver RAL 9006*
- *mounting frame MODUL 7M included*
- *mounting dimensions 140x230mm, depth min 120mm*
- *floor lining thickness up to 10mm*
- *in accordance with EN 50085-1 and EN 50085-2-2*

**SPOJNA PRIRUBNICA PODNE KUTIJE MT 7**

RB31

- spojna prirubnica podne kutije za poklopac MT 7
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 95-125 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX FLANGE MT 7**

- *floor box flange for box cover MT 7*
- *metal, galvanized*
- *for installation in a floor or double floor*
- *adjustable height 95-125mm*
- *in accordance with EN 50085-1 and EN 50085-2-2*

**SPOJNA PRIRUBNICA PODNE KUTIJE MT 7 H = 88mm**

RB41

- spojna prirubnica podne kutije za poklopac MT 7 H = 88 mm
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 120-150mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX FLANGE MT 7 H=88mm**

- *floor box flange for box cover MT 7 H=88mm*
- *metal, galvanized*
- *for installation in a floor or double floor*
- *adjustable height 120-150mm*
- *in accordance with EN 50085-1 and EN 50085-2-2*

**SPOJNA PRIRUBNICA PODNE KUTIJE MT 14**

RB33

- podna kutija MT 14
- metalna, srebrne boje RAL 9006
- nosači MODUL 2x7M ugrađeni
- ugradne dimenzije 230x230 mm, dubina min. 95 mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX MT 14**

- *floor box MT 7*
- *metal, colour silver RAL 9006*
- *mounting frame MODUL 7M included*
- *mounting dimensions 140x230mm, depth min 95mm*
- *floor lining thickness up to 10mm*
- *in accordance with EN 50085-1 and EN 50085-2-2*

**PODNA KUTIJA MT 14 H = 88mm**


RB43

- podna kutija MT 14
- metalna, srebrne boje RAL 9006
- nosači MODUL 2x7M ugrađeni
- ugradne dimenzije 230x230 mm, dubina min. 120mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX MT 14 H=88mm**

- *floor box MT 14*
- *metal, colour silver RAL 9006*
- *mounting frames MODUL 2x7M included*
- *mounting dimensions 230x230mm, depth min 120mm*
- *floor lining thickness up to 10mm*
- *in accordance with EN 50085-1 and EN 50085-2-2*

## FLOOR BOXES MT




RB34

## SPOJNA PRIRUBNICA PODNE KUTIJE MT 14

- spojna prirubnica podne kutije za poklopac MT 14
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 95-125 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX FLANGE MT 14

- floor box flange for box cover MT 14
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 95-125mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB44

## SPOJNA PRIRUBNICA PODNE KUTIJE MT 14 H = 88mm

- spojna prirubnica podne kutije za poklopac MT 14 H = 88 mm
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 120-150mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX FLANGE MT 14 H=88mm

- floor box flange for box cover MT 14 H=88mm
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 120-150mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB36

## PODNA KUTIJA MT 21

- podna kutija MT 21
- metalna, srebrne boje RAL 9006
- nosači MODUL 3x7M ugrađeni
- ugradne dimenzije 320x230 mm, dubina min. 95 mm
- debeljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX MT 21

- floor box MT 21
- metal, colour silver RAL 9006
- mounting frames MODUL 3x7M included
- mounting dimensions 320x230mm, depth min 95mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB46

## PODNA KUTIJA MT 21 H = 88mm

- podna kutija MT 21
- metalna, srebrne boje RAL 9006
- nosači MODUL 3x7M ugrađeni
- ugradne dimenzije 320x230 mm, dubina min. 120mm
- debeljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX MT 21 H=88mm

- floor box MT 21
- metal, colour silver RAL 9006
- mounting frames MODUL 3x7M included
- mounting dimensions 320x230mm, depth min 120mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB37

## SPOJNA PRIRUBNICA PODNE KUTIJE MT 21

- spojna prirubnica podne kutije za poklopac MT 21
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 95-125 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX FLANGE MT 21

- floor box flange for box cover MT 21
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 95-125mm
- in accordance with EN 50085-1 and EN 50085-2-2




RB47

## SPOJNA PRIRUBNICA PODNE KUTIJE MT 21 H = 88mm

- spojna prirubnica podne kutije za poklopac MT 21 H = 88 mm
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 120-150mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX FLANGE MT 21 H=88mm

- floor box flange for box cover MT 21 H=88mm
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 120-150mm
- in accordance with EN 50085-1 and EN 50085-2-2

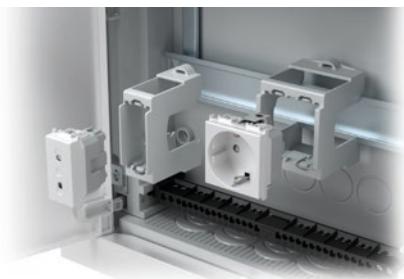

RB20



tip type	naziv description	tehnički podaci technical data
RB10	ADAPTER ZA DIN TRAČNICU ADAPTER FOR DIN RAIL	35mm 1M
RB11	ADAPTER ZA DIN TRAČNICU ADAPTER FOR DIN RAIL	35mm 2M
RB20	RAZDJELNI ORMARIĆ DISTRIBUTION BOX	MO 12+2
.	.	.


**ADAPTER ZA DIN TRAČNICU 35mm 1M**

RB10

- adapter MODUL 1M
- za Din tračnicu 35 mm
- sukladno normi EN 50022

**ADAPTER FOR DIN RAIL 35mm 1M**

- adapter MODUL 1M
- for DIN rail 35mm
- in accordance with EN 50022




RB11

- adapter MODUL 2M
- za Din tračnicu 35 mm
- sukladno normi EN 50022

**ADAPTER FOR DIN RAIL 35mm 2M**

- adapter MODUL 2M
- for DIN rail 35mm
- in accordance with EN 50022






RB20

## RAZDJELNI ORMARIĆ MO 12 + 2

- razdjeljni ormarić MO jedan red 12+2MU
- 400V ~, razred II, IP40
- metalna vratašča i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- univerzalna ugradnja u zid od opeke ili u šupljji zid
- sukladno normama EN 60670-1 i IEC 60670-24

## DISTRIBUTION BOX MO 12+2

- distribution box MO single row 12+2MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- universal for brick or hollow wall mounting
- in accordance with EN 60670-1 and IEC 60670-24




RB21

## RAZDJELNI ORMARIĆ MO 24 + 4

- razdjeljni ormarić MO dva reda 24+4MU
- 400V ~, razred II, IP40
- metalna vratašča i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- univerzalna ugradnja u zid od opeke ili u šupljji zid
- sukladno normama EN 60670-1 i IEC 60670-24

## DISTRIBUTION BOX MO 24+4

- distribution box MO double row 24+4MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- universal for brick or hollow wall mounting
- in accordance with EN 60670-1 and IEC 60670-24




RB22

## RAZDJELNI ORMARIĆ MO 36 + 6

- razdjeljni ormarić MO tri reda 36+4MU
- 400V ~, razred II, IP40
- metalna vratašča i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- univerzalna ugradnja u zid od opeke ili u šupljji zid
- sukladno normama EN 60670-1 i IEC 60670-24

## DISTRIBUTION BOX MO 36+6

- distribution box MO triple row 36+6 MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- universal for brick or hollow wall mounting
- in accordance with EN 60670-1 and IEC 60670-24

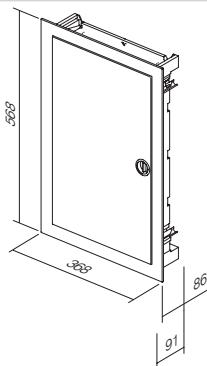



RB23

## RAZDJELNI ORMARIĆ MO 48 + 8

- razdjeljni ormarić MO četiri reda 48+4MU
- 400V ~, razred II, IP40
- metalna vratašča i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- univerzalna ugradnja u zid od opeke ili u šupljji zid
- sukladno normama EN 60670-1 i IEC 60670-24

## DISTRIBUTION BOX MO 48+8

- distribution box MO quad row 48+8 MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- universal for brick or hollow wall mounting
- in accordance with EN 60670-1 and IEC 60670-24

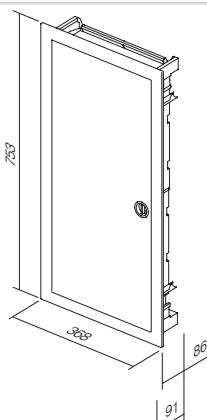

	RB20	RB21	RB22	RB23
x	314	314	314	314
y	314	414	539	724



ekonomik®



Planned for excellence  
Style is essential



ERGO

METAL

SOFT

Neutralan, kompaktan, elegantan dizajn može se prilagoditi svakom okruženju u kojem boravite ili radite. Ne odstupa od interijera, nego se u njega harmonično uklapa.

A neutral, compact, elegant design is adjustable to every working or living area. It does not stick out from the interior, but rather harmonically fits into it.





## Planirano za savršenstvo Stil je bitan



Čista linija nježno je zaobljena – dobro osmišljena ergonomija posebno za vas.

A pure line is slightly curved - well considered ergonomics especially for you.



Možete birati između sjajnih reflektirajućih površina i suvremenoga metalnog izgleda.

You can choose between shiny reflective surfaces and modern metallic look.



Mekoća oblika pronaći će svoje mjesto, kako u modernim interijerima tako i u onim klasičnim.

The softness of the form will find its place in modern as well as in classic interiors.

HARMONY

REFLEX

UV PROTECT

Želje mogu biti vrlo različite. Stoga smo za vas pomno odabrali mogućnosti koje vam pružaju pravi odgovor. Neutralna paleta boja dodatno će ispuniti vaš ambijent – neće vas ograničavati.

Desires can be very different. Therefore we have carefully selected possibilities for you, which can offer you the right answer. A neutral palette of colours will only complement your ambient - it will not restrict it.

Press and the world will spring to life  
Colourful landscape between walls



Doživljaj refleksije pružit će vam sjajni metali od polimera u bijeloj i bež boji.

Shiny polymer materials in white and beige colours enable reflective mood.



Odabrani dekorativni metalni sloj istovremeno je i moderan i neutralan.

Selected decorative metallic coat is at the same time modern and neutral.

# Pritisnite i svijet će oživjeti Šareni krajolik između zidova



Za sve vas, koji se želite igrati pastelnim bojama, Ekonomik Colour idealno je rješenje.

For those who want to play with pastel colours Ekonomik Color represents a perfect solution.



Robusnost i velika otpornost na vanjske utjecaje (UV) osigurane su duroplastičnim materijalom (linija Colour).

Robustness and high resistance to external effects (UV) are secured by duroplastic materials (Color line).



VERTICAL

HORIZONTAL

SAVE SPACE



Pri sastavljanju sačuvajte prostor na zidu. Ako raspolazešte s malo prostora, prava je odluka „okomito“.

With combining you save space on the wall. When faced with a limited space, »vertically« is the right decision.



Kombinirajte prema vlastitoj želji.

Combine as you please.



Vidljivi elementi mogu se jednostavno demontirati. Bit će vam zahvalni i majstori.

Visible elements can be easily taken apart. Painters will be grateful to you.




Prolonge your day with a touch  
Simplified living

## Produžite svoj dan dodirom Za jednostavniji život

Ekonomik je rješenje za sustav standardnih okruglih kutija. Pomoću njega možemo planirati kako jednostavne instalacije, novogradnje i adaptacije tako i one zahtjevnije. Sustav karakterizira spajanje bez upotrebe vijaka što će vam uštedjeti vrijeme pri ugradnji elemenata.

Ekonomik is a solution for the system of standardized round installations boxes. It can be used for simple as well as more demanding installations, new buildings and adaptations. The system is characterised by plug-in contacts which save time during installation of elements.

# Osjećajte se ugodno u sigurnom skloništu Potpuno povjerenje u dobru izgradnju

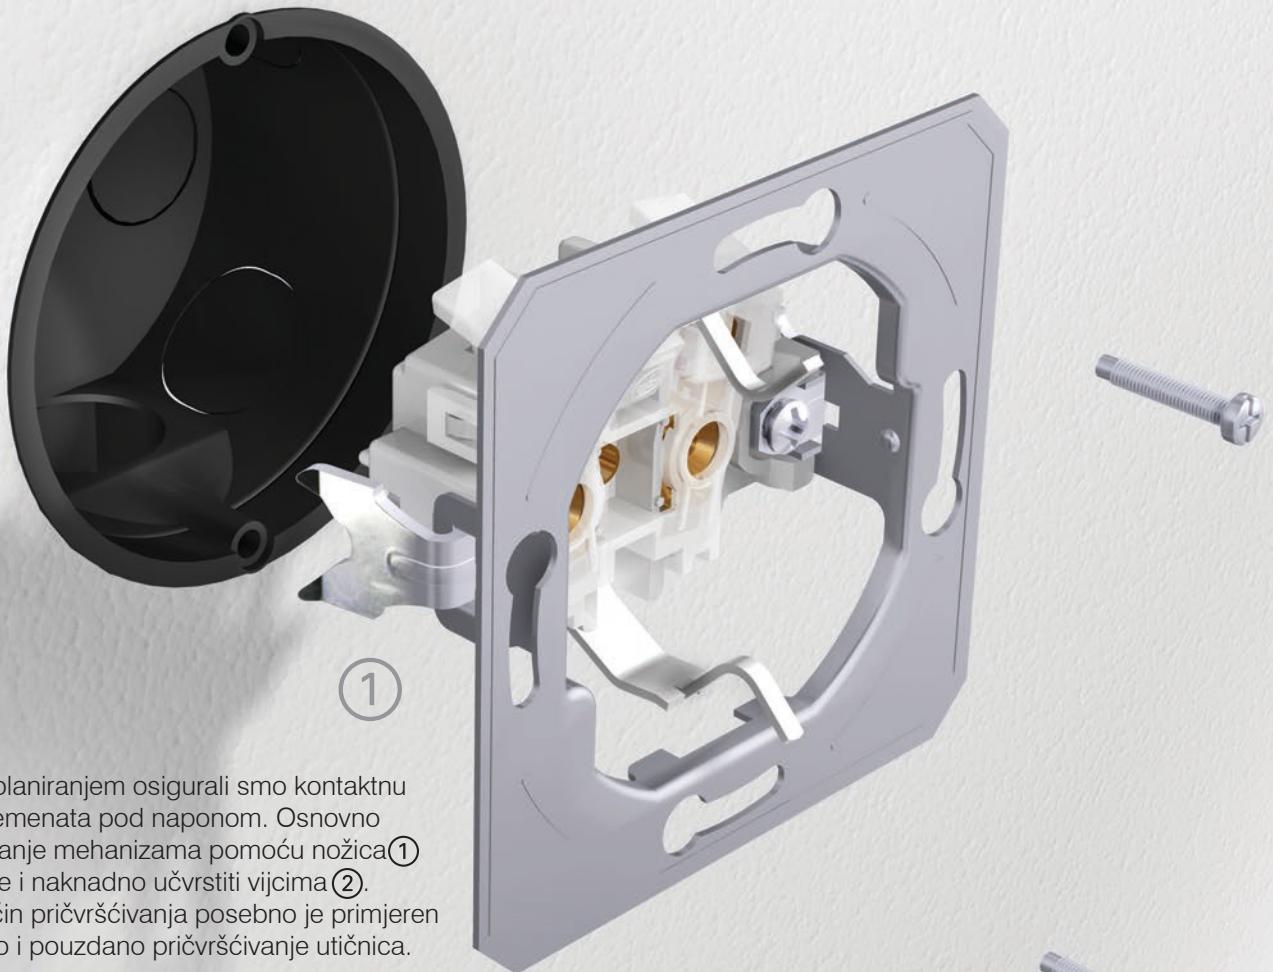


Pomnim planiranjem osigurali smo kontaktnu zaštitu elemenata pod naponom. Osnovno pričvršćivanje mehanizma pomoću nožica ① moguće je i naknadno učvrstiti vijcima ②. Takav način pričvršćivanja posebno je primjenjen za sigurno i pouzdano pričvršćivanje utičnica.

By careful planning elements under voltage have been protected against touching. Basic fixing of mechanisms with fixing claws ① allows additional strengthening with screws ②. This manner is especially appropriate for safe and reliable fixing of sockets.

SIMPLE


FAST

FLEX



Dobro osmišljena konstrukcija sklopki omogućava također i jednostavno dodatno osvjetljenje.

A well-planned switch construction makes easy illumination possible also subsequently.



Spajanje bez vijaka omogućava brzo i pouzdano priključenje vodiča. Na isti se kontakt mogu pričvrstiti dva vodiča različitih presjeka.

Plug-in contacts enable quick and reliable attachment of wires. Two wires of different diameters can be attached to the same contact.

Montažne kutije olakšat će vam posao ugradnje. Zajamčene su odgovarajuće duljine.

Easy-fitting installation boxes will make your work easier. Proper lengths are guaranteed.



Sklopke su testirane prema međunarodnim standardima koji jamče sigurnost i dug vijek trajanja.

Switches were tested according to international standards which guarantee safety and long life span.



Pouzdanost preklopa osiguravaju kontakti izrađeni od srebrne legure (AgNi).


Contacts made of silver alloy (Ag-Ni) guarantee safe switching.

## Feeling well in a safe shelter Total confidence in a good construction

SAFE

THRUST

CERTIFIED



Nožice omogućavaju dublje pričvršćivanje (i preko keramickih pločica i sl.)

Fixing claws enable deeper fixing (also through ceramic tiles, etc.)



Sve sklopke na prednjoj strani nose vidljivu oznaku.

All switches have a clear identification in the back.

**TEM**



**SKLOPKE SE**  
**SWITCHES SE**

172

**TIPKE TE**  
**BUTTONS TE**

176

**OSVJETLJENJE IA**  
**ILLUMINATION IA**

177

**UTIČNICE VE**  
**SOCKETS VE**

179

**KOMUNIKACIJE KE**  
**COMMUNICATIONS KE**

183

**POKLOPCI PE**  
**COVERS PE**

187

**ELEKTRONIKA EE**  
**ELECTRONICS EE**

188

**PRIBOR AE**  
**ACCESSORIES AE**

193

**OKVIRI OE**  
**SURROUNDS OE**

195



tip type	naziv description	tehnički podaci technical data	boja colour	opcijski podaci 1 optional data 1	opcijski podaci 2 optional data 2
SE10	SKLOPKA JEDNOPOLNA SWITCH 1WAY	10AX 250V~	<input type="checkbox"/> PW bijela sjajna polar white	NT neutralna neutral	50
SE11	TIPKALO JEDNOPOLNO PUSH BUTTON 1WAY	10A 250V~	<input checked="" type="checkbox"/> IW bež sjajna ivory white		51
SE22	SKLOPKA DVOPOLNA SWITCH 2POLE	16AX 250V~	<input type="checkbox"/> ES srebrna mat elox silver	IN indikator indicator	03
.	.	.	<input type="checkbox"/> CO bijeli duroplast white thermoset		04
.	.	.	<input checked="" type="checkbox"/> NB crna sjajna night black		.

## SKLOPKA JEDNOPOLNA 16AX 250V ~



SE10

- 10AX 250V~, tip SE10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>





## TIPKALO JEDNOPOLNO 10A 250V ~




SE11

- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 1WAY 10A 250V~
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>





## SKLOPKA DVOPOLNA 16AX 250V ~



SE22

- 16AX 250V~, tip SE22
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2 5mm<sup>2</sup>
- samo u kombinaciji s tipkom TE10\_NT03





## SKLOPKA SERIJSKA JEDNOPOLNA 10AX 250V ~



SE50


- 10AX 250V~, tip SE50
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2GANG-1WAY 10AX 250V~
- 10A 250V~, type SE50
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



## S W I T C H E S      S E



SE51




## TIPKALO SERIJSKO-JEDNOPOLNO 10A 250V ~


- 10A 250V~, tip SE51
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## PUSH BUTTON 2GANG-1WAY 10A 250V ~

- 10A 250V~, type SE51
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SE52




## SKLOPKA ŽALUZIJSKA 10AX 250V ~


- 10AX 250V~, tip SE52
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- s mehaničkom blokadom

## SWITCH SHUTTERS 10AX 250V ~

- 10AX 250V~, type SE52
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock



SE53




## TIPKALO ŽALUZIJSKO 10A 250V ~


- 10A 250V~, tip SE53
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- s mehaničkom blokadom

## PUSH BUTTON SHUTTERS 10A 250V ~

- 10A 250V~, type SE53
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock



SE60




## SKLOPKA IZMJENIČNA 10AX 250V ~


- 10AX 250V~, tip SE60
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH 2WAY 10AX 250V ~

- 10AX 250V~, type SE60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SE63




## SKLOPKA IZMJENIČNA DVOSTRUKA 10AX 250V ~


- 10AX 250V~, tip SE63
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH DOUBLE 2WAY 10AX 250V ~

- 10AX 250V~, type SE63
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SE70




## SKLOPKA KRIŽNA 10AX 250V ~

- 10AX 250V~, tip SE70
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH INTERMEDIATE 10AX 250V ~

- 10AX 250V~, type SE70
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



ekonomik



- SE10PW
- SE10IW
- SE10ES
- SE10CO
- SE10NB

## SKLOPKA JEDNOPOLNA 10AX 250V~

- 10AX 250V~, tip SE10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 1WAY 10AX 250V~**
- 10AX 250V~, type SE10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE10PWIN
- SE10IWIN
- SE10ESIN
- SE10COIN
- SE10NBIN

## SKLOPKA JEDNOPOLNA 10AX 250V~ \_ IN

- IN indikator
- 10AX 250V~, tip SE10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 1WAY 10AX 250V~ \_ IN**
- IN indicator
- 10AX 250V~, type SE10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE11PW
- SE11IW
- SE11ES
- SE11CO
- SE11NB

## TIPKALO JEDNOPOLNO 10A 250V~

- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 1WAY 10A 250V~**
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE11PWTI50
- SE11IWTI50
- SE11ESTI50
- SE11COTI50
- SE11NBTI50

## TIPKALO JEDNOPOLNO 10A 250V~ \_ TI 50

- TI 50 indikator zvono + neonska tinjalica
- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 1WAY 10A 250V~ \_ TI 50**
- TI 50 indicator bell+neon lamp
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE11PWTI51
- SE11IWTI51
- SE11ESTI51
- SE11COTI51
- SE11NBTI51

## TIPKALO JEDNOPOLNO 10A 250V~ \_ TI 51

- TI 51 indikator svjetlo + neonska tinjalica
- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 1WAY 10A 250V~ \_ TI 51**
- TI 51 indicator light+neon lamp
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE11PWIL
- SE11IWIL
- SE11ESIL
- SE11COIL
- SE11NBIL

## TIPKALO JEDNOPOLNO 10A 250V~ \_ IL

- IL natpisna pločica
- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 1WAY 10A 250V~ \_ IL**
- IL inscription plate
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE22PWNT03
- SE22IWNTO3
- SE22ESNT03
- SE22NBNT03

## SKLOPKA DVOPOLNA 16AX 250V~ \_ NT 03

- NT 03 neutralna 0-1
- 16AX 250V~, tip SE22
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- SWITCH 2POLE 16AX 250V~ \_ NT 03**
- NT 03 neutral 0-1
- 16AX 250V~, type SE22
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>



## S W I T C H E S      S E



- SE50PW  
 SE50IW  
 SE50ES  
 SE50CO  
 SE50NB

## SKLOPKA SERIJSKA-JEDNOPOLNA 10AX 250V ~

- 10AX 250V~, tip SE50
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2GANG-1WAY 10AX 250V~**
- 10AX 250V~, type SE50
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE51PW  
 SE51IW  
 SE51ES  
 SE51CO  
 SE51NB

## TIPKALO SERIJSKO-JEDNOPOLNO 10A 250V ~

- 10A 250V~, tip SE51
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 2GANG-1WAY 10A 250V~**
- 10A 250V~, type SE51
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE52PWNT09  
 SE52IWNT09  
 SE52ESNT09  
 SE52CONT09  
 SE52NBNT09

## SKLOPKA ŽALUZIJSKA 10AX 250V ~ \_ NT 09

- NT 09 neutralno gore-dolje
- 10AX 250V~, tip SE52
- sukladno normi EN 60669-1
- bezvijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- s mehaničkom blokadom



## SWITCH SHUTTERS 10AX 250V~ \_ NT 09

- NT 09 neutral up-down
- 10AX 250V~, type SE52
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock

## TIPKALO ŽALUZIJSKO 10A 250V~ \_ NT 09

- NT 09 neutralno gore-dolje
- 10A 250V~, tip SE53
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- s mehaničkom blokadom



- SE53PWTI50  
 SE53IWTI50  
 SE53ESTI50  
 SE53COTI50  
 SE53NBNTI50

## PUSH BUTTON SHUTTERS 10A 250V~ \_ NT 09

- NT 09 neutral up-down
- 10A 250V~, type SE53
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock

## SKLOPKA IZMJENIČNA 10AX 250V ~

- 10AX 250V~, tip SE60
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>



- SE60PW  
 SE60IW  
 SE60ES  
 SE60CO  
 SE60NB

## SWITCH 2WAY 10AX 250V~

- 10AX 250V~, type SE60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE63PW  
 SE63IW  
 SE63ES  
 SE63CO  
 SE63NB

## SKLOPKA IZMJENIČNA DVOSTRUKA 10AX 250V ~

- 10AX 250V~, tip SE63
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>



## SWITCH DOUBLE 2WAY 10AX 250V~

- 10AX 250V~, type SE63
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE70PW  
 SE70IW  
 SE70ES  
 SE70CO  
 SE70NB



## SKLOPKA KRIŽNA 10AX 250V ~

- 10AX 250V~, tip SE70
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>



## SWITCH INTERMEDIATE 10AX 250V~

- 10AX 250V~, type SE70
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



ekonomik

				
TE11	PW	NT	09	
tip type	naziv description	boja colour	opcijski podaci 1 <i>optional data 1</i>	opcijski podaci 2 <i>optional data 2</i>
TE10	TIPKA OBČNA <i>BUTTON 1GANG</i>	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>	NT neutralna <i>neutral</i>	 50
TE11	TIPKA SERIJSKA <i>BUTTON 2GANG</i>	<input checked="" type="checkbox"/> IW bež sjajna <i>ivory white</i>		 51
.	.	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>	IN indikator <i>indicator</i>	 03
.	.	<input type="checkbox"/> CO bijeli duroplast <i>white thermoset</i>		 04
.	.	<input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>		.

**TIPKA OBČNA**

- TE10PW
- TE10IW
- TE10ES
- TE10CO
- TE10NB

- tipka zajedno s nosačem

**BUTTON 1GANG**

- button together with carrier

**TIPKA INDIKATOR**

- TE10PWIN
- TE10IWIN
- TE10ESIN
- TE10COIN
- TE10NBIN

- tipka zajedno s nosačem

**BUTTON INDICATOR**

- button together with carrier

**TIPKA S NATPISNOM PLOČICOM**

- TE13PWIL
- TE13IWIL
- TE13ESIL
- TE13NBIL

- tipka zajedno s nosačem, s natpisnom pločicom

**BUTTON WITH INSCRIPTION PLATE**

- button together with carrier, with inscription plate


**TIPKA SERIJSKA**


- TE11PW
- TE11IW
- TE11ES
- TE11CO
- TE11NB

- tipka serijska zajedno s nosačem

**BUTTON 2GANG**

- button 2gang together with carrier

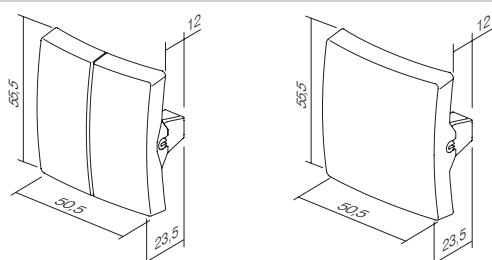

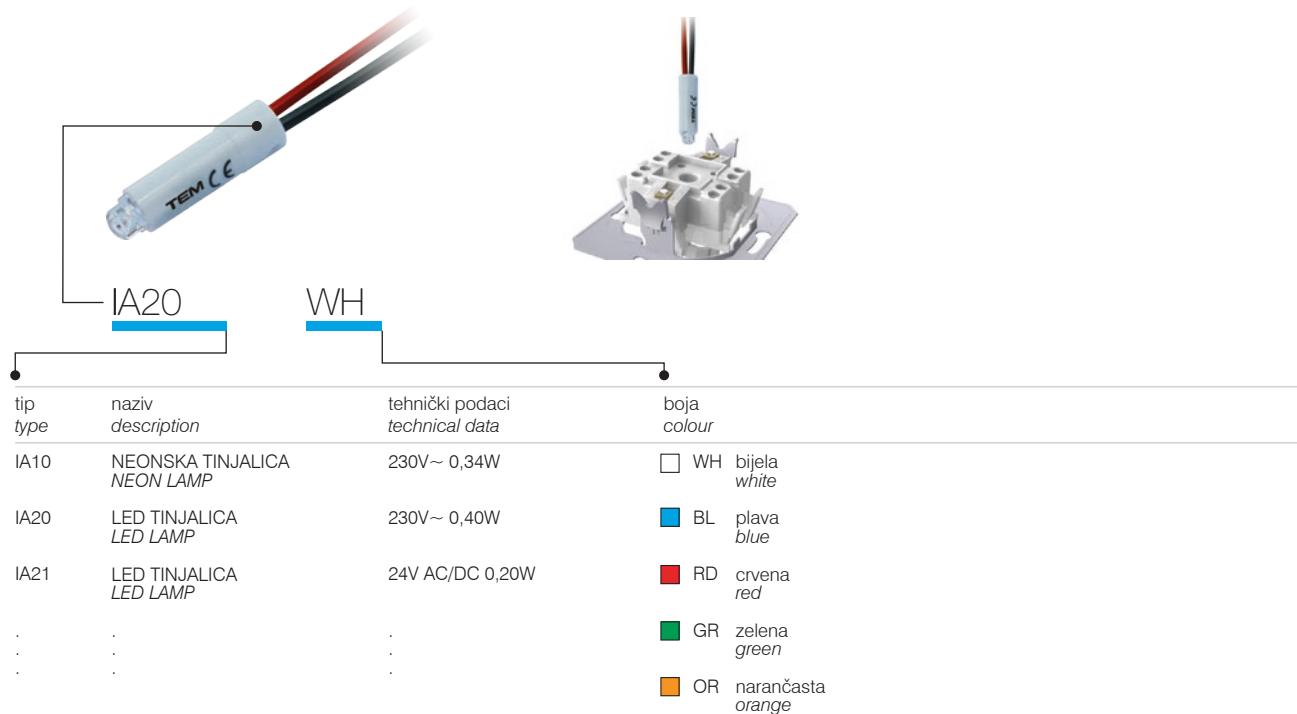

NEONSKA TINJALICA 230V~ 0,34W

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**NEON LAMP 230V~ 0,34W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator

LED TINJALICA 230V AC/DC 0.40W

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**LED LAMP 230V AC/DC 0,40W**  
- for indication, illumination or  
constant illumination of switch  
- in combination with button with indicator

LED TINJALICA 24V AC/DC 0.20W

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke u kombinaciji s tipkom s indikatorom

**LED LAMP 24V AC/DC 0,20W**  
- for indication, illumination or  
constant illumination of switch  
in combination with button indicator

LED TIN IAI LICA 12V AC/DC 0.10W

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke

- u kombinaciji s tipkom s indikatorom












**LED LAMP 12V AC/DC 0,10W**

- for indication, illumination or constant illumination of switch


\* Indikacija /  
Indication

Rasvjetna tijela /  
Illumination

\* Osvjetljenje stalno uključeno /  
Illumination always on

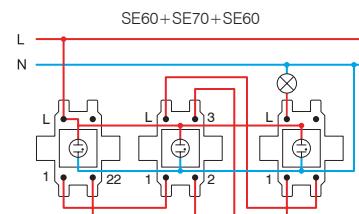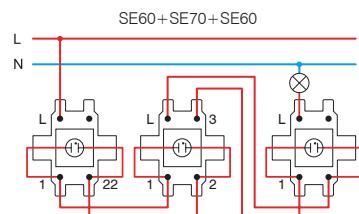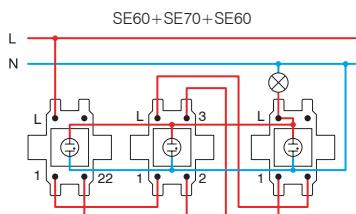

\* spojne shema kompaktne fluorescentne tinjalice (CFL) /  
wiring scheme for compact fluid lamp (CFL)



## S O C K E T S V E

					
	VE11	PT	XO	KS	
tip type	naziv description	tehnički podaci technical data	opcijski podaci 1 optional data 1	opcijski podaci 2 optional data 2	
VE10	ŠUKO UTIĆNICA SOCKET SCHUKO	2P+E 16A 250V~	XO bez okvira without cover plate	KS zaštita za djecu child protection	
VE11	ŠUKO UTIĆNICA+POKLJUPAC SOCKET SCHUKO+COVER	2P+E 16A 250V~			
VE12	ŠUKO UTIĆNICA SOCKET SCHUKO	2P+E 16A 250V~ BV	KS zaštita za djecu child protection		
.	.	.			
boja colour					
<input type="checkbox"/> PW	bijela sjajna polar white	<input checked="" type="checkbox"/> PT	bijela+prozirna white+transparent	<input type="checkbox"/> PP	bijela+bijela white+white
<input checked="" type="checkbox"/> IW	bež sjajna ivory white	<input checked="" type="checkbox"/> IT	bež+prozirna ivory+transparent	<input checked="" type="checkbox"/> II	bež+bež ivory+ivory
<input type="checkbox"/> ES	srebrna mat elox silver	<input checked="" type="checkbox"/> ST	srebrna+prozirna silver+transparent	<input type="checkbox"/> SS	srebrna+srebrna silver+silver
<input type="checkbox"/> CO	bijeli duroplast white thermoset	<input checked="" type="checkbox"/> CT	bijela+prozirna white+transparent	<input type="checkbox"/> BB	crna+crna black+black
<input checked="" type="checkbox"/> NB	crna sjajna night black	<input checked="" type="checkbox"/> BT	crna+prozirna black+transparent	<input checked="" type="checkbox"/> RR	crvena+crvena red+red
<input type="checkbox"/> RD	crvena red	<input checked="" type="checkbox"/> RT	crvena+prozirna red+transparent	<input type="checkbox"/> GG	zelena+zelena green+green
<input type="checkbox"/> GR	zelena green	<input checked="" type="checkbox"/> GT	zelena+prozirna green+transparent	<input checked="" type="checkbox"/> OO	narančasta+narančasta orange+orange
<input type="checkbox"/> OR	narančasta orange	<input checked="" type="checkbox"/> OT	narančasta+prozirna orange+transparent		
					

šuko – sukladno normi EN 60884-1, CEE7 (lista standarda III)

schuko - in accordance with EN 60884-1, CEE7 (standard sheet III)



francuska – sukladno normi NF C 61-314 (lista standarda V)

French - in accordance with NF C 61-314 (standard sheet V)



## UTIČNICA ŠUKO 2P + E 16A 250V ~ XO



- VE10PWXO
- VE10IWXO
- VE10ESXO
- VE10COXO
- VE10NBXO
- VE10RDXO
- VE10GRXO
- VE10ORXO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko  
 - 16A 250V~, tip VE10



## SOCKET SCHUKO 2P+E 16A 250V ~ XO

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko  
 - 16A 250V~, type VE10



- VE11PTXO
- VE11ITXO
- VE11STXO
- VE11BTXO

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V ~ XO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE11



## SOCKET SCHUKO+COVER 2P+E 16A 250V ~ XO

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE11



- VE12PWXO
- VE12IWXO
- VE12ESXO
- VE12COXO
- VE12NBXO
- VE12RDXO
- VE12GRXO
- VE12ORXO

## UTIČNICA ŠUKO 2P + E 16A 250V ~ BV \_ XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko  
 - 16A 250V~, tip VE12



## SOCKET SCHUKO 2P+E 16A 250V ~ BV \_ XO

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko  
 - 16A 250V~, type VE12



- VE13PTXO
- VE13ITXO
- VE13STXO
- VE13BTXO

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V ~ BV \_ XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE13



## SOCKET SCHUKO+COVER 2P+E 16A 250V ~ BV \_ XO

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE13



- VE10PW
- VE10IW
- VE10ES
- VE10CO
- VE10NB

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko  
 - 16A 250V~, tip VE10



## SOCKET SCHUKO 2P+E 16A 250V ~

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko  
 - 16A 250V~, type VE10



- VE11PT
- VE11IT
- VE11ST
- VE11CT
- VE11BT

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V ~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE11



## SOCKET SCHUKO+COVER 2P+E 16A 250V ~

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE11



- VE12PW
- VE12IW
- VE12ES
- VE12CO
- VE12NB

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko  
 - 16A 250V~, tip VE12



## SOCKET SCHUKO 2P+E 16A 250V ~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko  
 - 16A 250V~, type VE12



- VE13PT
- VE13IT
- VE13ST
- VE13CT
- VE13BT

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V ~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE13



## SOCKET SCHUKO+COVER 2P+E 16A 250V ~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE13

## S O C K E T S V E



- VE40PWXO
- VE40IWXO
- VE40ESXO
- VE40COXO
- VE40NBXO
- VE40RDXO
- VE40GRXO
- VE40ORXO

## UTIČNICA FRANCUSKA 2P + E 16A 250V ~ \_ XO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E francuska  
 - 16A 250V~, tip VE40



- VE41PTXO
- VE41ITXO
- VE41STXO
- VE41PTXO
- VE41BTXO
- VE41PPXO

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V~ \_ XO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E francuska+poklopac  
 - 16A 250V~, tip VE41



- VE42PWXO
- VE42IWXO
- VE42ESXO
- VE42COXO
- VE42NBXO
- VE42RDXO
- VE42GRXO
- VE42ORXO

## UTIČNICA FRANCUSKA 2P + E 16A 250V~ BV \_ XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - utičnica sa zaštitnim kontaktom francuska  
 - 16A 250V~, tip VE42



- VE43PTXO
- VE43ITXO
- VE43STXO
- VE43PTXO
- VE43BTXO
- VE43PPXO

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V~ BV \_ XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E francuska+poklopac  
 - 16A 250V~, tip VE43



- VE40PW
- VE40IW
- VE40ES
- VE40CO
- VE40NB

## UTIČNICA FRANCUSKA 2P + E 16A 250V ~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - 2P+E francuska  
 - 16A 250V~, tip VE40



- VE41PT
- VE41IT
- VE41ST
- VE41CT
- VE41BT

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - 2P+E francuska+poklopac  
 - 16A 250V~, tip VE41



- VE42PW
- VE42IW
- VE42ES
- VE42CO
- VE42NB

## UTIČNICA FRANCUSKA 2P + E 16A 250V ~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - utičnica sa zaštitnim kontaktom francuska  
 - 16A 250V~, tip VE42



- VE43PT
- VE43IT
- VE43ST
- VE43CT
- VE43BT

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V ~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - 2P+E francuska+poklopac  
 - 16A 250V~, tip VE43





VE16PWKS  
 VE16IWKS  
 VE16ESKS  
 VE16NBKS

#### UTIČNICA ŠUKO DVOSTRUKA 2P + E 16A 250V~

- 2P+E šuko dvostruka  
- 16A 250V~, tip VE16  
- sukladno normama IEC 60884-1, CEE7  
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- KS zaštita za djecu od dodira kontakt-a

#### SOCKET SCHUKO DOUBLE 2P+E 16A 250V~

- 2P+E schuko double  
- 16A 250V~, type VE16  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- KS build-in child protection – shuttered live contacts




VE46PWKS  
 VE46IWKS  
 VE46ESKS  
 VE46NBKS

#### UTIČNICA FRANCUSKA DVOSTRUKA 2P + E 16A 250V~

- 2P + E francuska dvostruka  
- 16A 250V~, tip VE46  
- sukladno normama IEC 60884-1, CEE7; NF C 61-314, CSN 33 2318; PN-E 93201  
- vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- KS zaštita za djecu od dodira kontakt-a

#### SOCKET FRENCH DOUBLE 2P+E 16A 250V~

- 2P+E French double  
- 16A 250V~, type VE46  
- in accordance with IEC 60884-1, CEE7; NF C 61-314, CSN 33 2318; PN-E 93201  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- KS build-in child protection – shuttered live contacts




VE30PW  
 VE30IW  
 VE30ES  
 VE30NB

#### UTIČNICA 2P 16A 250V ~

- 2P bez voda za uzemljenje  
- 16A 250V ~  
- sukladno normama EN 60884-1, CEE7 (lista standarda I)  
- vičano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>

#### SOCKET 2P 16A 250V~

- 2P without earthing contact  
- 16A 250V~  
- in accordance with EN 60884-1, CEE7 (standard sheet I)  
- screw contacts 1.5-2.5mm<sup>2</sup>

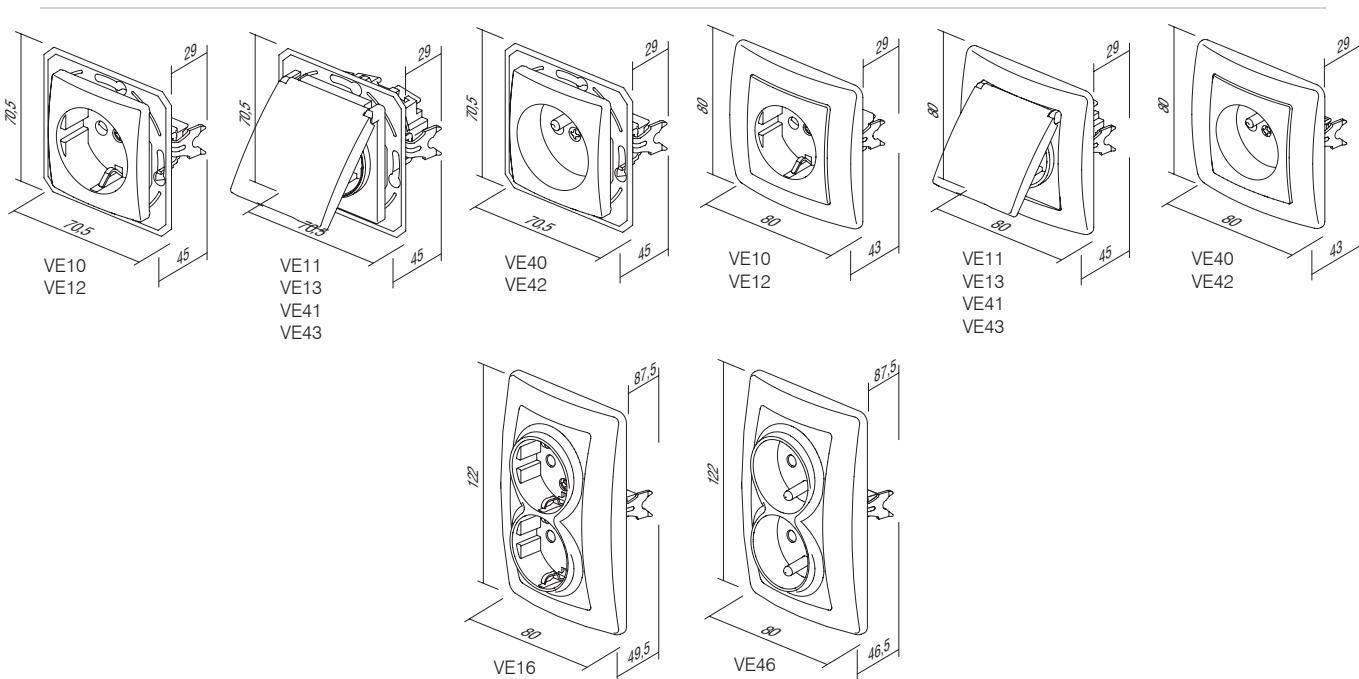



tip type	naziv description	tehnički podaci technical data	boja colour
KE11	UTIČNICA TV-R ZAVRŠNA SOCKET TV-R END-LINE	2dB	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
KE12	UTIČNICA TV-R PROLAZNA SOCKET TV-R THROUHPASS	8,5dB	<input checked="" type="checkbox"/> IW bež sjajna <i>ivory white</i>
KE16	UTIČNICA SAT-TV-R ZAVRŠNA SOCKET SAT-TV-R END-LINE	3dB	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	<input type="checkbox"/> CO bijeli duropolast <i>white thermoset</i>
.	.	.	<input type="checkbox"/> NB crna sjajna <i>night black</i>



KE11


2 dB ← → 7,5 dB

#### UTIČNICA TV-R ZAVRŠNA 2dB

- TV-R završna
- propušta frekvenciju u rasponu 5÷862MHz
- prigušenje: R-7,5dB, TV-2dB
- sukladno normi EN 50083-1
- vijčano pričvršćivanje

#### SOCKET TV-R END-LINE 2dB

- TV-R end-line
- frequency range 5÷862MHz
- reduction: R-7.5dB, TV-2dB
- in accordance with EN 50083-1
- screw contacts



KE12


8,5 dB ← → 12,5 dB  
2 dB

#### UTIČNICA TV-R PROLAZNA 8,5dB

- TV-R prolazna
- propušta frekvenciju u rasponu 5÷862MHz
- prigušenje: R-12,5dB, TV-8,5dB, prolaz-2dB
- sukladno normi EN 50083-1
- vijčano pričvršćivanje

#### SOCKET TV-R THROUHPASS 8,5dB

- TV-R troughpass
- frequency range 5÷862MHz
- reduction: R-12.5dB, TV-8.5dB, trough-2dB
- in accordance with EN 50083-1
- screw contacts



KE16


3 dB ← → 1 dB  
1,5 dB

#### UTIČNICA SAT-TV-R ZAVRŠNA 3dB

- SAT-TV-R završna
- propušta frekvenciju u rasponu 5÷2400MHz
- prigušenje: R-1dB, TV-1,5dB, SAT-3dB
- za ugradnju u okruglu kutiju Ø60 s nožicama ili vijcima
- sukladno normi EN 50083-1
- vijčano pričvršćivanje

#### SOCKET SAT-TV-R END-LINE 3dB

- SAT-TV-R end-line
- frequency range 5÷2400MHz
- reduction: R-1dB, TV-1.5dB, SAT-3dB
- for mounting in round box Ø60 with claws or screws
- in accordance with EN 50083-1
- screw contacts




KE36

- KS keystone standard pričvršćivanja
- RJ11 6/4
- sukladno normi IEC 60603-7

#### SOCKET TEL KS RJ11 6/4

- KS keystone fixing standard
- RJ11 6/4
- in accordance with IEC 60603-7






KE37

**UTIĆNICA CAT5e KS RJ45 8/8**

- KS keystone standard pričvršćivanja
- CAT5e, RJ45 8/8
- sukladno normi IEC 60603-7

**SOCKET CAT5e KS RJ45 8/8**  
*- KS keystone fixing standard  
 - CAT5e, RJ45 8/8  
 - in accordance with IEC 60603-7*




KE38

**UTIĆNICA TEL KS DVOSTRUKA 2x RJ11 6/4**

- KS keystone standard pričvršćivanja
- 2x RJ11 6/4
- sukladno normi IEC 60603-7

**SOCKET TEL KS DOUBLE 2x RJ11 6/4**  
*- KS keystone fixing standard  
 - 2x RJ11 6/4  
 - in accordance with IEC 60603-7*




KE39

**UTIĆNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8**

- KS keystone standard pričvršćivanja
- 2x CAT5e, RJ45 8/8
- sukladno normi IEC 60603-7

**SOCKET CAT5e KS DOUBLE 2x RJ45 8/8**  
*- KS keystone fixing standard  
 - 2x CAT5e, RJ45 8/8  
 - in accordance with IEC 60603-7*




KE45

**ADAPTER KS JEDNOSTRUKI**

- KS keystone standard priključivanja - jednostruki
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- nije ugrađen komunikacijski modul

**ADAPTER KS SINGLE**

- KS keystone fixing standard - single
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- communication module not included




KE46

**ADAPTER KS DVOSTRUKI**

- KS keystone standard priključivanja - dvostruki
- AMP, Tyco, ...
- nije ugrađen komunikacijski modul

**ADAPTER KS DOUBLE**

- KS keystone fixing standard - double
- AMP, Tyco, ...
- communication module not included




KE47

**ADAPTER PD DVOSTRUKI**

- standard pričvršćivanja PD Panduit Mini-COM – dvostruki
- nije ugrađen komunikacijski modul

**ADAPTER PD DOUBLE**

- PD Panduit Mini-COM fixing standard - double
- communication module not included





- KE10PW  
 KE10IW  
 KE10ES  
 KE10CO  
 KE10NB

#### UTIČNICA TV OSNOVNA 0dB

- TV osnovna
  - prigušenje 0dB
  - stražnji konektor – F standard
- SOCKET TV BASIC 0dB**
- TV basic
  - reduction 0dB
  - back connector – F standard



- KE11PW  
 KE11IW  
 KE11ES  
 KE11CO  
 KE11NB

#### UTIČNICA TV-R ZAVRŠNA 2dB

- TV-R završna
  - propušta frekvenciju u rasponu 5÷862 MHz
  - prigušenje: R-7.5dB, TV-2dB
  - sukladno normi EN 50083-1
  - vijčano pričvršćivanje
- SOCKET TV-R END-LINE 2dB**
- TV-R end-line
  - frequency range 5÷862 MHz
  - reduction: R-7.5dB, TV-2dB
  - in accordance with EN 50083-1
  - screw contact



- KE12PW  
 KE12IW  
 KE12ES  
 KE12CO  
 KE12NB

#### UTIČNICA TV-R PROLAZNA 8,5dB

- TV-R prolazna
  - propušta frekvenciju u rasponu 5÷862 MHz
  - prigušenje: R-12,5dB, TV-8,5dB, prolaz-2dB
  - sukladno normi EN 50083-1
  - vijčano pričvršćivanje
- SOCKET TV-R TROUGHPASS 8,5dB**
- TV-R troughpass
  - frequency range 5÷862 MHz
  - reduction: R-12.5dB, TV-8.5dB, trough-2dB
  - in accordance with EN 50083-1
  - screw contacts



- KE16PW  
 KE16IW  
 KE16ES  
 KE16CO  
 KE16NB

#### UTIČNICA SAT-TV-R ZAVRŠNA 3dB

- SAT-TV-R završna
  - propušta frekvenciju u rasponu 5÷2400 MHz
  - prigušenje: R-1dB, TV-1.5dB, SAT-3dB
  - sukladno normi EN 50083-1
  - vijčano pričvršćivanje
- SOCKET SAT-TV-R END-LINE 3dB**
- SAT-TV-R end-line
  - frequency range 5÷2400 MHz
  - reduction: R-1dB, TV-1.5dB, SAT-3dB
  - in accordance with EN 50083-1
  - screw contacts



- KE22PW  
 KE22IW  
 KE22ES  
 KE22CO  
 KE22NB

#### UTIČNICA AUDIO 2xRCA

- audio 2xRCA
  - pričvršćivanje vodiča lemljenjem
- SOCKET AUDIO 2xRCA**
- audio 2xRCA
  - soldering connection of cable



- KE23PW  
 KE23IW  
 KE23ES  
 KE23CO  
 KE23NB

#### UTIČNICA AUDIO ZVUČNICI

- audio 2x Ø4 mm
  - pričvršćivanje vodiča za zvučnike umetanjem ili banana utikačem Ø4 mm
  - lemljenje spojeva kabela na stražnjoj strani
- SOCKET AUDIO LOUDSPEAKERS**
- audio 2x Ø4mm
  - to accommodate speaker wire, banana plug Ø4mm or spades
  - soldering connection of cable at the back side





- KE36PW
- KE36IW
- KE36ES
- KE36CO
- KE36NB

#### UTIČNICA TEL KS RJ11 6/4

- KS keystone standard pričvršćivanja
  - RJ11 6/4
  - sukladno normi IEC 60603-7
- SOCKET TEL KS RJ11 6/4**
- KS keystone fixing standard
  - RJ11 6/4
  - in accordance with IEC 60603-7



- KE37PW
- KE37IW
- KE37ES
- KE37CO
- KE37NB

#### UTIČNICA CAT5e KS RJ45 8/8

- KS keystone standard pričvršćivanja
  - CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT5e KS RJ45 8/8**
- KS keystone fixing standard
  - CAT5e, RJ45 8/8
  - in accordance with IEC 60603-7



- KE38PW
- KE38IW
- KE38ES
- KE38CO
- KE38NB

#### UTIČNICA TEL KS DVOSTRUKA 2x RJ11 6/4

- KS keystone standard pričvršćivanja
  - 2x RJ11, 6/4
  - sukladno normi IEC 60603-7
- SOCKET TEL KS DOUBLE 2x RJ11 6/4**
- KS keystone fixing standard
  - 2x RJ11, 6/4
  - in accordance with IEC 60603-7



- KE39PW
- KE39IW
- KE39ES
- KE39CO
- KE39NB

#### UTIČNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8


- KS keystone standard pričvršćivanja
  - 2x CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT5e KS DOUBLE 2x RJ45 8/8**
- KS keystone fixing standard
  - 2x CAT5e, RJ45 8/8
  - in accordance with IEC 60603-7




- KE35PW
- KE35IW
- KE35ES
- KE35CO
- KE35NB

#### UTIČNICA TEL LT RJ11 6/4

- TEL LT vijak
  - vijčano pričvršćivanje
  - RJ11 6/4
  - sukladno normi IEC 60603-7
- SOCKET TEL LT RJ11 6/4**
- TEL LT screw
  - screw contacts
  - RJ11 6/4
  - in accordance with IEC 60603-7

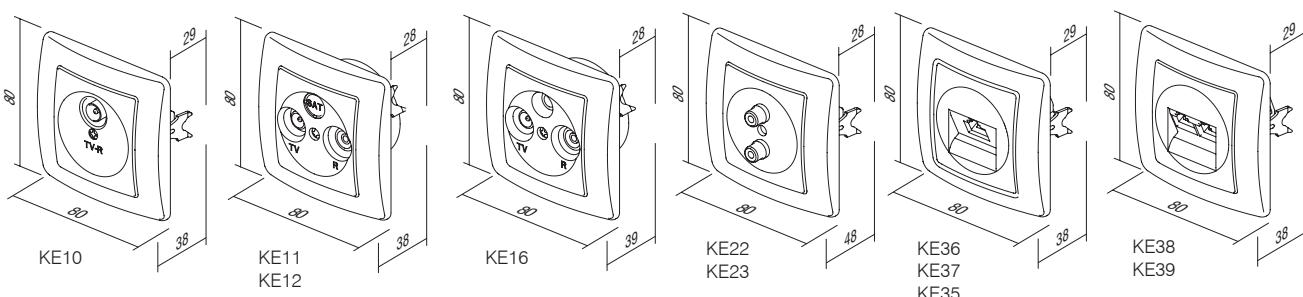

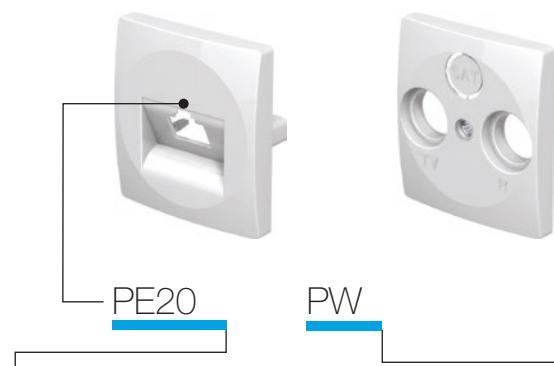

tip type	naziv description	tehnički podaci technical data	boja colour
PE10	POKLOPAC TV-R COVER TV-R	2P/3P	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
PE20	POKLOPAC KS JEDNOSTRUKI COVER KS SINGLE		<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
PE21	POKLOPAC KS DVOSTRUKI COVER KS DOUBLE		<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.		<input type="checkbox"/> CO bijeli duroplast <i>white thermoset</i>
.	.		<input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>

#### POKLOPAC TV-R 2P/3P



- PE10PW
- PE10IW
- PE10ES
- PE10CO
- PE10NB

- poklopac TV-R, 2P ili 3P s vijkom  
*COVER TV-R 2P/3P*  
- TV-R cover, 2P or 3P with screw



#### POKLOPAC KS JEDNOSTRUKI



- PE20PW
- PE20IW
- PE20ES
- PE20CO
- PE20NB

- KS poklopac jednostrukim  
*COVER KS SINGLE*  
- KS cover single



#### POKLOPAC KS DVOSTRUKI



- PE21PW
- PE21IW
- PE21ES
- PE21NB

-KS poklopac dvostruki  
*COVER KS DOUBLE*  
- KS cover double



#### POKLOPAC TAE/TDO








- PE30PW
- PE30IW
- PE30ES
- PE30NB

- TAE ili TDO poklopac s vijkom  
*COVER TAE/TDO*  
- TAE or TDO cover with screw



ekonomik



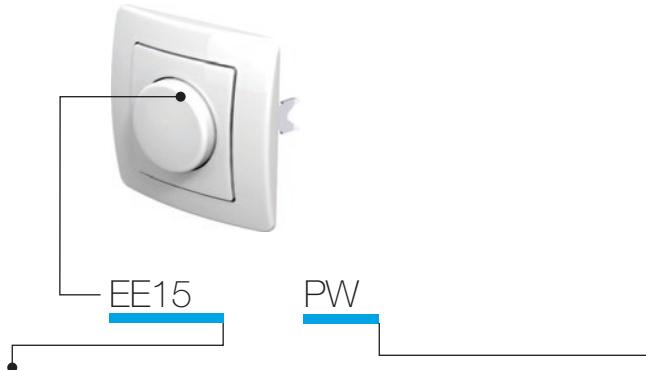

tip type	naziv description	tehnički podaci technical data	boja colour
EE15	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI <i>DIMMER ROTATIVE 2WAY</i>	RL 400W	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
EE16	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI <i>DIMMER ROTATIVE 2WAY</i>	RLC 400W	<input checked="" type="checkbox"/> IW bež sjajna <i>ivory white</i>
EE17	REGULATOR OSVJETLJENJA ROTACIJSKI <i>DIMMER ROTATIVE</i>	FAN 600VA	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	<input type="checkbox"/> CO bijeli duropolast <i>white thermoset</i>
.	.	.	<input type="checkbox"/> NB crna sjajna <i>night black</i>

#### REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RL 400W



EE15

- rotacijski s izmjeničnom sklopkom
- opterećenje RL, 40W – 400W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- unutarnji promjer tipke Ø6 mm
- priložen zamjenjivi osigurač

#### DIMMER ROTATIVE 2WAY RL 400W

- rotation control with 2-way switch
- load RL, 40W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V~ 50Hz
- button inner diameter Ø6mm
- replaceable fuse included

#### REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RLC 400W



EE16

- rotacijski s izmjeničnom sklopkom
- opterećenje RLC, 20W – 400W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- unutarnji promjer tipke Ø6 mm
- napajanje 230V ~ 50Hz
- elektronski osigurač

#### DIMMER ROTATIVE 2WAY RLC 400W

- rotation control with 2-way switch
- load RLC, 20W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- button inner diameter Ø6mm
- supply 230V~ 50Hz
- electronic fuse



EE17

**REGULATOR OSVJETLJENJA ROTACIJSKI VENTILATOR 600VA**

- rotacijski sa sklopkom
- tip 456; opterećenje: motor, 25VA - 600VA
- nije moguća kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- unutarnji promjer tipke Ø4 mm
- priložen zamjenjivi osigurač

**DIMMER ROTATIVE FAN 600VA**

- rotation control with switch
- type 456; load: motor, 25VA - 600VA
- 2-way switch combination is not possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V~ 50Hz
- button inner diameter Ø4mm
- replaceable fuse included


**REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 100W**

EE19

- rotacijski s izmjeničnom sklopkom
- opterećenje: LED, 0-100W (maks. 10 LED)  
GLS, 10-250W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- priložen zamjenjivi osigurač
- unutarnji promjer tipke Ø6 mm

**DIMMER ROTATIVE 2WAY LED 100W**

- rotation control with 2-way switch
- load: LED, 0-100W (max. 10 LEDs)  
GLS, 10-250W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V~ 50Hz
- replaceable fuse included
- button inner diameter Ø6mm

**IR SKLOPKA 5A 250V~**

□ EE32

- IR infracrvena sklopka
- napajanje: 230V~ ± 10% 50Hz
- relaj: 5A / 250V~ izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništici („zero crossing“)
- zaštitna razina: IP40
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>
- kut prepoznavanja: do 110° pri 20 °C
- raspon prepoznavanja: približno 8m pri 20 °C
- prilagodljivost trajanja: od približno 5 s do 12 min
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX
- temperatura radnog okruženja: od 0 °C do +40 °C
- nije prikladno za ugradnju u kutije duboke 45 mm
- samo za unutrašnju uporabu

**IR SWITCH 5A 250V~**

- IR infrared switch
- supply voltage: 230V~ ± 10 % 50Hz
- relay: 5A / 250V~ output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes
- only for indoor usage



- EE15PW  
■ EE15IW  
■ EE15ES  
□ EE15CO  
■ EE15NB

**REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RL 400W**

- rotacijski s izmjeničnom sklopkom
- opterećenje RL, 40W – 400W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- priložen zamjenjivi osigurač

**DIMMER ROTATIVE 2WAY RL 400W**

- rotation control with 2-way switch
- load RL, 40W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V~ 50Hz
- replaceable fuse included



## REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RLC 400W



- EE16PW
- EE16IW
- EE16ES
- EE16CO
- EE16NB

- rotacijski s izmjeničnom sklopkom  
- opterećenje RLC, 20W – 400W  
- moguća je kombinacija s izmjeničnom sklopkom  
- povezivanje više regulatora osvjetljenja nije dopušteno  
- sukladno normama EN 60669-1 i EN 60669-2-1  
- bezvijčani kontakti 1,5mm<sup>2</sup>  
- napajanje 230V ~ 50Hz  
- elektronski osigurač



## DIMMER ROTATIVE 2WAY RLC 400W

- rotation control with 2-way switch  
- load RLC, 20W - 400W  
- 2-way switch combination is possible  
- more dimmers combination is not allowed  
- in accordance with EN 60669-1 and EN 60669-2-1  
- plug-in contacts 1.5mm<sup>2</sup>  
- supply 230V~ 50Hz  
- electronic fuse

## REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 100W



- EE19PW
- EE19IW
- EE19ES
- EE19CO
- EE19NB

- rotacijski s izmjeničnom sklopkom  
- opterećenje: LED, 0-100W (maks. 10 LED)  
GLS, 10-250W  
- moguća je kombinacija s izmjeničnom sklopkom  
- povezivanje više regulatora osvjetljenja nije dopušteno  
- sukladno normama EN 60669-1 i EN 60669-2-1  
- bezvijčani kontakti 1,5mm<sup>2</sup>  
- napajanje 230V ~ 50Hz  
- priložen zamjenjivi osigurač



## DIMMER ROTATIVE 2WAY LED 100W

- rotation control with 2-way switch  
- load: LED, 0-100W (max. 10 LEDs)  
GLS, 10-250W  
- 2-way switch combination is possible  
- more dimmers combination is not allowed  
- in accordance with EN 60669-1 and EN 60669-2-1  
- plug-in contacts 1.5mm<sup>2</sup>  
- supply 230V~ 50Hz  
- replaceable fuse included

## IR SKLOPKA 5A 230V~



- EE32PW
- EE32IW
- EE32ES
- EE32CO
- EE32NB


- IR infracrvena sklopka  
- napajanje: 230V~ ± 10% 50Hz  
- relai: 5A / 250V~ izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništicu („zero crossing“)  
- zaštitna razina: IP40  
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>  
- kut prepoznavanja: do 110° pri 20 °C  
- raspon prepoznavanja: približno 8m pri 20 °C  
- prilagodljivost trajanja: od približno 5 s do 12 min  
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX  
- temperaturna radnog okruženja: od 0 °C do +40 °C  
- nije prikladno za ugradnju u kutije duboke 45 mm  
- samo za unutrašnju uporabu




## IR SWITCH 5A 230V~

- IR infrared switch  
- supply voltage: 230V~ ± 10 % 50Hz  
- relay: 5A / 250V~ output for limited current with high resistance for zero crossing  
- protection rating: IP40  
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>  
- detection angle: up to 110° at 20°C  
- detection area: approx. 8 m at 20°C  
- adjustability of duration: from approx. 5 s to 12 min  
- adjustability of brightness: from approx. 5 to 200 LUX  
- operating temperature: from 0°C to +40°C  
- not suitable for installation in 45 mm deep boxes  
- only for indoor usage


EE15, EE16, EE19




EE15, EE16, EE19

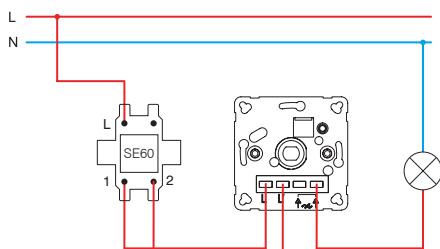


EE15, EE16, EE19

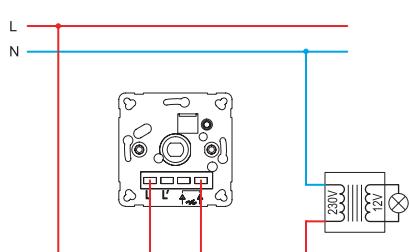


EE15, EE16, EE19

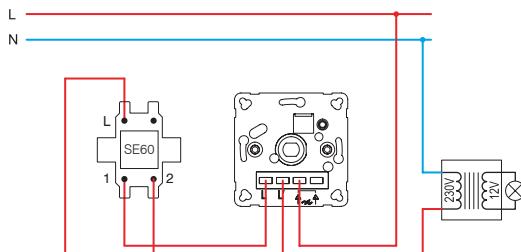


EE16, EE19

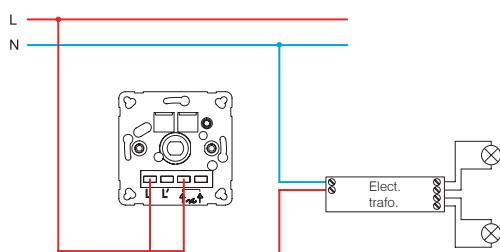


EE16, EE19

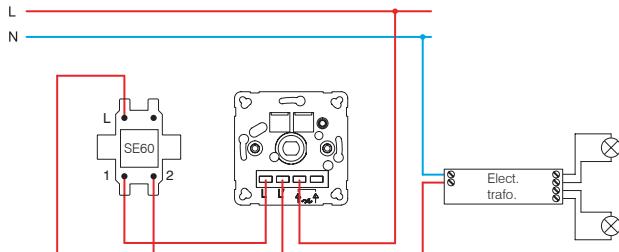

EE17

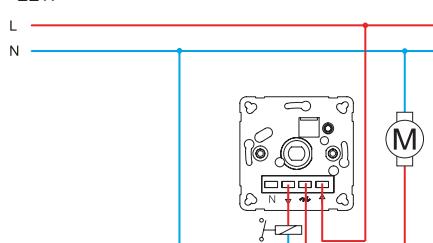


EE15 (40-400W)




1 - žarulja sa žarnom niti /  
incandescent lamp  
2 - halogena žarulja /  
halogen lamp

EE16 (20-400W)


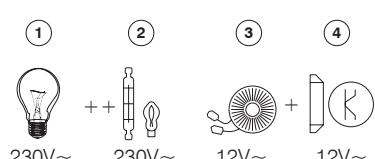



3 - klasični transformator /  
classical transformer  
4 - električni transformator /  
electronic transformer

EE19 (GLS 10-250W ; LED 0-100W)

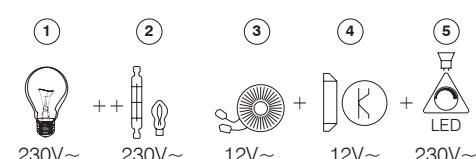

5 - LED tinjalic s regulacijom osvjetljenja /  
dimmable LED lamp



	
tip type	naziv description
PE40	POKLOPAC REGULATORA OSVJETLJENJA <i>COVER DIMMER</i>
	boja colour
	<input type="checkbox"/> PW bijela sjajna <i>polar white</i> <input type="checkbox"/> IW bež sjajna <i>ivory white</i> <input type="checkbox"/> ES srebrna mat <i>elox silver</i> <input type="checkbox"/> CO bijeli duroplast <i>white thermoset</i> <input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>



- PE40PW
- PE40IW
- PE40ES
- PE40CO
- PE40NB

#### POKLOPAC REGULATORA OSVJETLJENJA Ø4


- poklopac regulatora osvjetljenja Ø4 mm  
- za EE17  
**COVER DIMMER Ø4**  
- cover dimmer Ø4mm  
- for EE17



- PE41PW
- PE41IW
- PE41ES
- PE41CO
- PE41NB

#### POKLOPAC REGULATORA OSVJETLJENJA Ø6


- poklopac regulatora osvjetljenja Ø6 mm  
- za EE15, EE16, EE19  
**COVER DIMMER Ø6**  
- cover dimmer Ø6mm  
- for EE15, EE16, EE19




- PE32PW
- PE32IW
- PE32ES
- PE32NB

#### POKLOPAC ZA IR SKLOPKU

- poklopac za IR sklopku  
**COVER IR SWITCH**  
- cover for IR switch



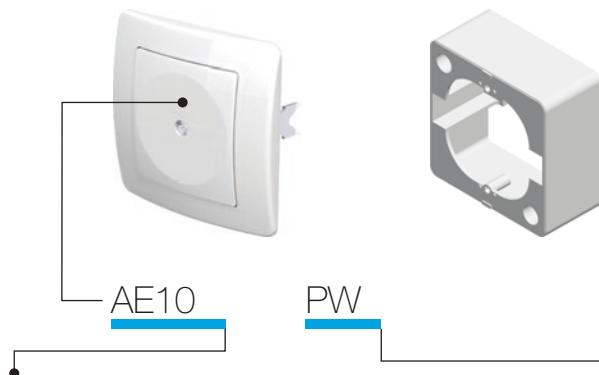


tip type	naziv description	boja colour
AE10	SLIJEPI ELEMENT <i>BLANK</i>	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
AE20	PRIKLJUČNA KUTIJA 3P + N + E 5X4mm <sup>2</sup> <i>CONNECTION BOX 3P+N+E 5x4mm<sup>2</sup></i>	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
AE30	NADŽBUKNA KUTIJA <i>SURFACE MOUNT BOX</i>	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	<input type="checkbox"/> CO bijeli duropol <i>white thermoset</i>
.	.	<input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>



- AE10PW  
 AE10IW  
 AE10ES  
 AE10CO  
 AE10NB

#### SLIJEPI ELEMENT



- za pokrivanje praznog prostora
- BLANK**
- for filling up empty spaces



- AE20PW  
 AE20IW

#### PRIKLJUČNA KUTIJA 5-POLNA 3P + N + E 5x4mm<sup>2</sup>


- priključna kutija 3P+N+E
- 16A 400V ~
- sukladno normi VDE 0606-1:2000
- vijčano pričvršćivanje vodiča presjeka 1,5-4mm<sup>2</sup>
- CONNECTION BOX 5POLE 3P+N+E 5x4mm<sup>2</sup>**
- 3P+N+E connection box
- 16A 400V~
- in accordance with VDE 0606-1:2000
- screw contacts 1.5-4mm<sup>2</sup>



- AE30PW  
 AE30IW

#### NADŽBUKNO KUTIJA 1

- nadžbukna kutija
- SURFACE MOUNT BOX 1**
- surface mounting box






AE50PW  
 AE50TS

#### ZIDNI ŠTITNIK

- štiti površinu oko utičnice ili sklopke

#### WALL PROTECTION

- protects surface around socket or switch

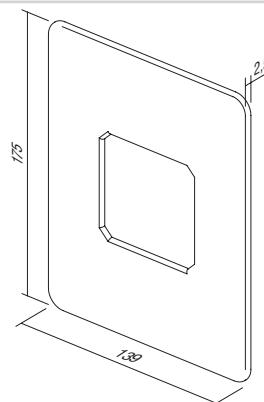


AE51PW  
 AE51IW

#### ZAŠTITA ZA DJECU KS

- KS dodatna zaštita za djecu od dodira kontakta

#### CHILD PROTECTION KS

- KS additional child protection insert - shuttered live contacts



## O K V I R I O E

	OE10		PW
tip type	naziv description	boja colour	
OE10	OKVIR EKONOMIK 1 <i>SURROUND EKONOMIK 1</i>	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>	
OE20	OKVIR EKONOMIK 2 VODORAVNI <i>SURROUND EKONOMIK 2 HORIZONTAL</i>	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>	
OE30	OKVIR EKONOMIK 3 VODORAVNI <i>SURROUND EKONOMIK 3 HORIZONTAL</i>	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>	
.	.	<input type="checkbox"/> CO bijeli duropolast <i>white thermoset</i>	
.	.	<input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>	

	<b>OKVIR EKONOMIK 1</b> <input type="checkbox"/> OE10PW <input type="checkbox"/> OE10IW <input type="checkbox"/> OE10ES <input type="checkbox"/> OE10CO <input checked="" type="checkbox"/> OE10NB	
	<b>OKVIR EKONOMIK 2 VODORAVNI</b> <input type="checkbox"/> OE20PW <input type="checkbox"/> OE20IW <input type="checkbox"/> OE20ES <input type="checkbox"/> OE20CO <input checked="" type="checkbox"/> OE20NB	
	<b>OKVIR EKONOMIK 2 OKOMITI</b> <input type="checkbox"/> OE21PW <input type="checkbox"/> OE21IW <input type="checkbox"/> OE21ES <input type="checkbox"/> OE21CO <input checked="" type="checkbox"/> OE21NB	
	<b>OKVIR EKONOMIK 3 VODORAVNI</b> <input type="checkbox"/> OE30PW <input type="checkbox"/> OE30IW <input type="checkbox"/> OE30ES <input type="checkbox"/> OE30CO <input checked="" type="checkbox"/> OE30NB	


Ekonomik



- OE31PW
- OE31IW
- OE31ES
- OE31CO
- OE31NB

#### OKVIR EKONOMIK 3 OKOMITI


- dekorativni trostruki okvir okomiti
  - sukladno normi EN 60669-1
- SURROUND EKONOMIK 3 VERTICAL**
- decorative surround 3-gang vertical
  - in accordance with EN 60669-1



- OE40PW
- OE40IW
- OE40ES
- OE40CO
- OE40NB

#### OKVIR EKONOMIK 4 VODORAVNI


- dekorativni četverostruki okvir vodoravni
  - sukladno normi EN 60669-1
- SURROUND EKONOMIK 4 HORIZONTAL**
- decorative surround 4-gang horizontal
  - in accordance with EN 60669-1

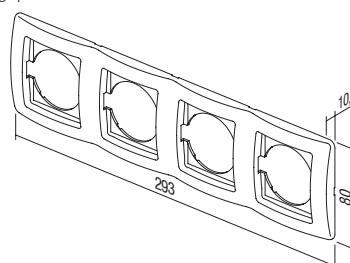

- OE41PW
- OE41IW
- OE41ES
- OE41CO
- OE41NB

#### OKVIR EKONOMIK 4 OKOMITI

- dekorativni četverostruki okvir okomiti
  - sukladno normi EN 60669-1
- SURROUND EKONOMIK 4 VERTICAL**
- decorative surround 4-gang vertical
  - in accordance with EN 60669-1



#### DEKORATIVNI UMETCI U BOJI / COLOR DECORATIVE FRAMES



OE90GR	ZELENI / GREEN	OE90YL	ŽUTI / YELLOW	OE90MB	MET. PLAVI / MET. BLUE
OE90BL	PLAVI / BLUE	OE90WH	BIJELI / WHITE	OE90BZ	BRONČANI / BRONZE
OE90VO	LJUBIĆASTI / VIOLET	OE90GY	SIVI / GREY	OE90CR	SREBRNI / SILVER
OE90PI	RUŽIĆASTI / PINK	OE90BK	CRNI / BLACK	OE90GO	ZLATNI / GOLD
OE90RD	CRVENI / RED	OE90BR	SMEDI / BROWN		





**TEM**



KATALOG / CATALOGUE

**fontana**

---

**SKLOPKE SF**  
**SWITCHES SF**

200

---

**UTIČNICE VF**  
**SOCKETS VF**

202

---

**SETOVI CF**  
**SETS CF**

203

---

**PRIBOR AF**  
**ACCESSORIES AF**

205

				
SF10	PW	TI		
tip type	naziv description	tehnicički podaci technical data	boja colour	opcijiski podaci 1 optional data 1
SF10	SKLOPKA JEDNOPOLNA SWITCH 1WAY	IP44 10AX 250V~	<input type="checkbox"/> PW bijela mat (RAL 9016) white-mat	TI neonska tinjalica + indikator neon lamp + indication
SF11	TIPKALO JEDNOPOLNO PUSH BUTTON 1WAY	IP44 10A 250V~	<input checked="" type="checkbox"/> GY mat siva grey-mat	
SF20	SKLOPKA DVOPOLNA SWITCH 2POLE	IP44 10AX 250V~		
.	.	.		
.	.	.		

**SKLOPKA JEDNOPOLNA IP44 10AX 250V ~**

SF10PW  
 SF10GY

- 10AX 250V~, tip SF10
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 1WAY IP44 10AX 250V~**
- 10AX 250V~, type SF10
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>

**SKLOPKA JEDNOPOLNA IP44 10AX 250V ~ \_ TI**

SF10PWTI  
 SF10GYTI

- TI indikator + neonska tinjalica
  - 10AX 250V~, tip SF10
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 1WAY IP44 10AX 250V~ \_ TI**
- TI indicator+neon lamp
  - 10AX 250V~, type SF10
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>

**TIPKALO JEDNOPOLNO IP44 10A 250V~ \_ TI**

SF11PWTI  
 SF11GYTI

- TI indikator + neonska tinjalica
  - 10A 250V~, tip SF11
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 1WAY IP44 10A 250V~ \_ TI**
- TI indicator+neon lamp
  - 10A 250V~, type SF11
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>

**SKLOPKA DVOPOLNA IP44 10AX 250V ~**

SF20PW  
 SF20GY

- 10AX 250V~, tip SF20
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2POLE IP44 10AX 250V~**
- 10AX 250V~, type SF20
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>



## S W I T C H E S      S F



SF50PW  
 SF50GY

## SKLOPKA SERIJSKA JEDNOPOLNA IP44 10AX 250V ~

- 10AX 250V~, tip SF50
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2GANG-1WAY IP44 10AX 250V~**
- 10AX 250V~, type SF50
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>



SF51PW  
 SF51GY

## TIPKALO SERIJSKO JEDNOPOLNO IP44 10A 250V ~

- 10A 250V~, tip SF51
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 2GANG-1WAY IP44 10A 250V~**
- 10A 250V~, type SF51
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>



SF60PW  
 SF60GY

## SKLOPKA IZMJENIČNA IP44 10AX 250V ~

- 10AX 250V~, tip SF60
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2WAY IP44 10AX 250V~**
- 10AX 250V~, type SF60
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>



SF60PWTI  
 SF60GYTI

## SKLOPKA IZMJENIČNA IP44 10AX 250V ~ \_ TI

- TI indikator + neonska tinjalica
  - 10AX 250V~, tip SF60
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2WAY IP44 10AX 250V~ \_ TI**
- TI indicator+neon lamp
  - 10AX 250V~, type SF60
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>



SF63PW  
 SF63GY

## SKLOPKA IZMJENIČNA DVOSTRUKA IP44 10AX 250V ~


- 10AX 250V~, tip SF63
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2WAY DOUBLE IP44 10AX 250V~**
- 10AX 250V~, type SF63
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>




SF70PW  
 SF70GY

## SKLOPKA KRIŽNA IP44 10AX 250V ~

- 10AX 250V~, tip SF70
  - sukladno normi EN 60669-1
  - bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH INTERMEDIATE IP44 10AX 250V~**
- 10AX 250V~, type SF70
  - in accordance with EN 60669-1
  - plug-in contacts 1.5-2.5mm<sup>2</sup>

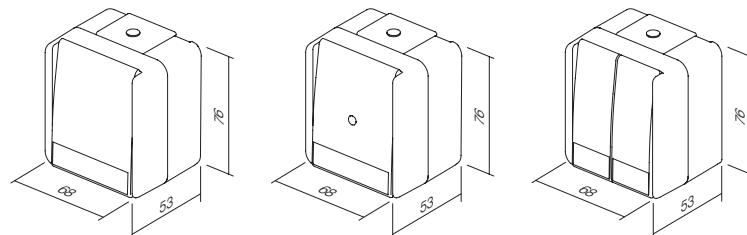

U T I Č N I C E      V F  
S O C K E T S

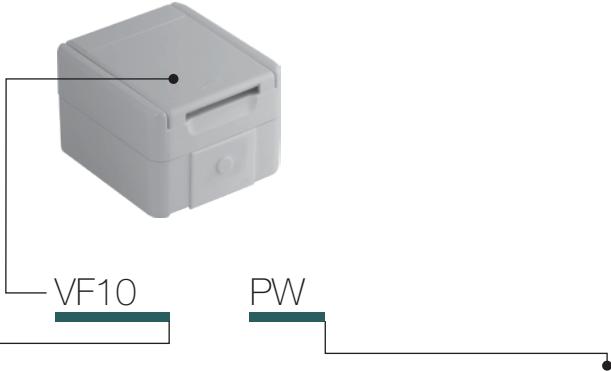

tip type	naziv description	tehnički podaci technical data	boja colour
VF10	ŠUKO UTIČNICA+POKLOPAC SOCKET SCHUKO+COVER	IP44 2P+E 16A 250V~	<input type="checkbox"/> PW bijela mat (RAL 9016) <b>GY</b> mat siva <i>grey-mat</i>

UTIČNICA ŠUKO + POKLOPAC IP44 2P+E 16A 250V ~



VF10PW  
**GY** VF10GY

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - 2P+E šuko+poklopac
  - 16A 250V~, tip VF10
  - sukladno normama EN 60884-1, CEE7
- SOCKET SCHUKO+COVER IP44 2P+E 16A 250V~
- screw contacts 1.5-2.5mm<sup>2</sup>
  - 2P+E schuko+cover
  - 16A 250V~, type VF10
  - in accordance with EN 60884-1, CEE7




UTIČNICA ŠUKO + POKLOPAC IP44 2P+E 16A 250V ~ BV



VF12PWTI  
**GY** VF12GYTI

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
  - 2P+E šuko+poklopac
  - 16A 250V~, tip VF12
  - sukladno normama EN 60884-1, CEE7
- SOCKET SCHUKO+COVER IP44 2P+E 16A 250V~ BV
- BV plug-in contacts 1.5-2.5mm<sup>2</sup>
  - 2P+E schuko+cover
  - 16A 250V~, type VF12
  - in accordance with EN 60884-1, CEE7





CF11

PW

tip type	naziv description	tehnički podaci technical data	boja colour
CF10	SET ŠUKO UTIČNICA DVOSTRUKIH VODORAVNE SOCKET SET SCHUKO DOUBLE HORIZ	2x 2P+E 16A 250V~ IP44	<input type="checkbox"/> PW bijela mat (RAL 9016)  white-mat
CF11	SET ŠUKO UTIČNICA DVOSTRUKIH OKOMITE SOCKET SET SCHUKO DOUBLE VERT	2x 2P+E 16A 250V~ IP44	<input checked="" type="checkbox"/> GY mat siva grey-mat
CF12	ŠUKO UTIČNICA + SKLOPKA IZMJENIČNI VODORAVNI SOCKET SCH+SWITCH 2WAY HORIZ	16A + 10A 250V~ IP44	.
.	.	.	.



CF10PW  
 CF10GY

#### SET ŠUKO UTIČNICA, DVOSTRUKI, VODORAVNI IP44 2x 2P+E 16A 250V ~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - 2x 2P+E šuko + poklopac vodoravni
  - 16A 250V~, tip CF10
  - sukladno normama EN 60884-1, CEE7
- SOCKET SET SCHUKO DOUBLE HORIZONTAL IP44 2x 2P+E 16A 250V~**
- screw contacts 1.5-2.5mm<sup>2</sup>
  - 2x 2P+E schuko+cover horizontal
  - 16A 250V~, type CF10
  - in accordance with EN 60884-1, CEE7



CF11PW  
 CF11GY

#### SET ŠUKO UTIČNICA DVOSTRUKI, OKOMITI IP44 2x 2P+E 16A 250V ~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - 2x 2P+E šuko + poklopac, okomiti set
  - 16A 250V~, tip CF11
  - sukladno normama EN 60884-1, CEE7
- SOCKET SET SCHUKO DOUBLE VERTICAL IP44 2x 2P+E 16A 250V~**
- screw contacts 1.5-2.5mm<sup>2</sup>
  - 2x 2P+E schuko+cover vertical
  - 16A 250V~, type CF11
  - in accordance with EN 60884-1, CEE7



CF12PW  
 CF12GY

#### SET ŠUKO UTIČNICA + SKLOPKA IZMJENIČNA, VODORAVNI IP44 16A + 10AX 250V ~

- vijčano (priključnica), bezvijčano (sklopka) pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+poklopac + sklopka izmjenična vodoravna
- 16A + 10AX 250V ~, tip CF12
- sukladno normama EN 60884-1, CEE7, EN 60669-1

#### SOCKET SCH+SWITCH SET 2WAY HORIZONTAL IP44 16A + 10AX 250V~

- screw (socket), plug-in (switch)
- contacts 1.5-2.5mm<sup>2</sup>
- 2P+E schuko+cover + switch 2-way horizontal
- 16A + 10AX 250V~, type CF12
- in accordance with EN 60884-1, CEE7, EN 60669-1





CF13PW  
 CF13GY

#### SET ŠUKO UTIČNICA + SKLOPKA IZMJENIČNA, OKOMITI, IP44 16A + 10AX 250V~

- vijčano (priključnica), bezvijčano (sklopka)
- pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+poklopac + sklopka izmjenična okomita
- 16A + 10AX 250V~, tip CF13
- sukladno normama EN 60884-1, CEE7, EN 60669-1



#### SOCKET SCH+SWITCH 2WAY SET VERTICAL IP44 16A + 10AX 250V~

- screw (socket), plug-in (switch)
- contacts 1.5-2.5mm<sup>2</sup>
- 2P+E schuko+cover + switch 2-way vertical
- 16A + 10AX 250V~, type CF13
- in accordance with EN 60884-1, CEE7, EN 60669-1



CF14PW  
 CF14GY

#### SET ŠUKO UTIČNICA DVOSTRUKI, VODORAVNI, IP44 2X 2P+E 16A 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2x 2P+E šuko + poklopac vodoravni
- 16A 250V~, tip CF14
- sukladno normama EN 60884-1, CEE7



#### SOCKET SET SCHUKO DOUBLE HORIZONTAL IP44 2x 2P+E 16A 250V~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>
- 2x 2P+E schuko+cover horizontal
- 16A 250V~, type CF14
- in accordance with EN 60884-1, CEE7



CF15PW  
 CF15GY

#### SET ŠUKO UTIČNICA DVOSTRUKI, OKOMITI, IP44 2X 2P+E 16A 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2x 2P+E šuko + poklopac, okomiti set
- 16A 250V~, tip CF15
- sukladno normama EN 60884-1, CEE7



#### SOCKET SET SCHUKO DOUBLE VERTICAL IP44 2x 2P+E 16A 250V~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>
- 2x 2P+E schuko+cover vertical
- 16A 250V~, type CF15
- in accordance with EN 60884-1, CEE7



CF16PW  
 CF16GY

#### SET UTIČNICA + SKLOPKA IZMJENIČNA, VODORAVNI, IP44 16A + 10AX 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+poklopac + sklopka izmjenična vodoravna
- 16A + 10AX 250V~, tip CF16
- sukladno normama EN 60884-1, CEE7, EN 60669-1



#### SOCKET+SWITCH SET SCH+2WAY HORIZONTAL IP44 16A + 10AX 250V~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>
- 2P+E schuko+cover + switch 2-way horizontal
- 16A + 10AX 250V~, type CF16
- in accordance with EN 60884-1, CEE7, EN 60669-1



CF17PW  
 CF17GY

#### SET UTIČNICA + SKLOPKA IZMJENIČNA, OKOMITI, IP44 16A + 10AX 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+poklopac + sklopka izmjenična okomita
- 16A + 10AX 250V~, tip CF17
- sukladno normama EN 60884-1, CEE7, EN 60669-1



#### SOCKET SCH+SWITCH 2WAY SET VERTICAL IP44 16A + 10AX 250V~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>
- 2P+E schuko+cover + switch 2-way vertical
- 16A + 10AX 250V~, type CF17
- in accordance with EN 60884-1, CEE7, EN 60669-1

P R I B O R A F  
A C C E S S O R I E S

AF10	PW	
tip type	naziv description	tehnički podaci technical data
AF10	RAZDJELNI ORMARIĆ <i>DISTRIBUTION BOX</i>	IP44 RN01
AF20	RAZDJELNI ORMARIĆ <i>DISTRIBUTION BOX</i>	IP55 ND01
		boja colour
		<input type="checkbox"/> PW bijela mat (RAL 9016) <i>white-mat</i>
		<input checked="" type="checkbox"/> GY mat siva <i>grey-mat</i>


RAZDJELNI ORMARIĆ IP44 RN01



AF10PW  
 AF10GY

- nadžbukni razdjeljni ormarić IP44
- 16A 400V ~
- sukladno normi EN 60309-1

**DISTRIBUTION BOX IP44 RN01**  
*- surface mounting distribution box IP44*  
*- 16A 400V~*  
*- in accordance with EN 60309-1*





RAZDJELNI ORMARIĆ IP55 ND01




AF20PW  
 AF20GY

- nadžbukna priključna kutija IP55
- brtve uključene
- sukladno normi EN 60309-1


**DISTRIBUTION BOX IP55 ND01**  
*- surface mounting connection box IP55*  
*- glands included*  
*- in accordance with EN 60309-1*




CF10  
CF14



CF11  
CF15



CF12  
CF16



CF13  
CF17

## M O D U L

šifra	opis proizvoda	stranica	šifra	opis proizvoda	stranica		
<b>PREKIDAČI SM</b>							
SM10	PREKIDAČ JEDNOPOLNI 16AX 250V~ 1M	58	KA10	KONEKTOR KS CAT3 RJ11 6/4	78		
SM11	TIPKALO JEDNOPOLNO 16A 250V~ 1M	58	KA11	KONEKTOR KS CAT5e RJ45 8/8	78		
SM12	PREKIDAČ JEDNOPOLNI 16AX 250V~ 1M	58	KA12	KONEKTOR KS CAT5eS RJ45 8/8	78		
SM20	PREKIDAČ DVOPOLNI 16AX 250V~ 1M	58	KA15	KONEKTOR KS CAT6 SCHRACK RJ45 8/8	78		
SM40	PREKIDAČ ZA ŽALUZINE 16AX 250V~ 1M	59	KA16	KONEKTOR KS CAT6S SCHRACK RJ45 8/8	78		
SM41	TIPKALO ZA ŽALUZINE 16A 250V~ 1M	59	KA17	KONEKTOR KS CAT6a SCHRACK RJ45 8/8	78		
SM60	PREKIDAČ IZMJENIČNI 16AX 250V~ 1M	59	KA27	KONEKTOR KS HDMI	79		
SM61	TIPKALO IZMJENIČNO 16A 250V~ 1M	59					
SM70	PREKIDAČ KRIŽNI 16AX 250V~ 1M	59					
SM10--	PREKIDAČ JEDNOPOLNI 16AX 250V~ 1M IN	60					
SM10--IN	PREKIDAČ JEDNOPOLNI 16A 250V~ 1M IN	60					
SM11--	TIPKALO JEDNOPOLNO 16A 250V~ 1M	60					
SM11--IN01	TIPKALO JEDNOPOLNO 16A 250V~ 1M IN 01	60					
SM11--IN02	TIPKALO JEDNOPOLNO 16A 250V~ 1M IN 02	61					
SM20--NT03	PREKIDAČ DVOPOLNI 16AX 250V~ 1M NT 03	61					
SM20--IN	PREKIDAČ DVOPOLNI 16AX 250V~ 1M IN	61					
SM40--NT10	PREKIDAČ ZA ŽALUZINE 1-0-2 16AX 250V~ 1M NT 10	61					
SM41--NT10	TIPKALO ZA ŽALUZINE 1-0-2 16A 250V~ 1M NT 10	61					
SM60--	PREKIDAČ IZMJENIČNI 16AX 250V~ 1M	61					
SM61--	TIPKALO IZMJENIČNO 16A 250V~ 1M	62					
SM62--CD	TIPKALO IZMJENIČNO S UZICOM 16A 250V~ 1M CD	62					
SM70--	PREKIDAČ KRIŽNI 16AX 250V~ 1M	62					
<b>TIPKE TM</b>							
TM11--	TIPKA 1M	63	EM10--	DIMER ROTACIJSKI RL 300W 1M	80		
TM11--IN	TIPKA 1M IN	63	EM11--	DIMER ROTIZMJENIČNI RL 300W 1M	80		
TM12--	TIPKA 2M	63	EM21	DIMER UGRADBENI RLC 300W	81		
TM12--IN	TIPKA 2M IN	63	EM22	DIMER UGRADBENI R 500W	81		
TM13--IL	TIPKA S NATPISNOM PLOČICOM 2M	64	EM25--	DIMER UNIVEZALNI RLC 0-300W 2M	82		
TM15--	TIPKA 1M DVOPOLNA	64	EM26--	TIPKALO ZA UPRAVLJANJE 2M	84		
TM21--	PUNILO 1M	64	EM27	MREŽNI FILTER PROTIV SMETNJI	84		
TM22--	PUNILO 2M	64	EM25PPOL20	SET PREKIDAČ/DIMER UNIVERZALNI RLC 0-300W 2M PP OL20	84		
TM31--	UVODNICA 1M	64	EM31--	IR PREKIDAČ 5A 250V~ 1M	85		
<b>INDIKACIJA IA</b>			EM32--	IR PREKIDAČ 5A 250V~ 2M	85		
IA10--	TINJALICA 220V~ 0,25W	66	EM37--	TERMOSTAT OSNOVNI 6A 250V~2M	87		
IA20--	SIJALICA LED 220V~ 4W	66	EM40--	KARTIČNA SKLOPKA OSNOVNA 3A 250V~ 3M	88		
IA21--	SIJALICA LED 24V AC/DC 0,5W	66	EM47	KARTICA ISO BAR KOD	88		
IA22--	SIJALICA LED 12V AC/DC 0,25W	66	EM44--	KARTIČNA SKLOPKA ZA UŠTEDU ENERGIJE 3M	89		
<b>UTIČNICE VM</b>			EM49	RELEJSKA JEDINICA ZA KARTIČNU SKLOPKU 2x16A 250V~	89		
VM10--	UTIČNICA SCHUKO+KS 2P+E 16A 250V~ 2M	68	EM45	RAZDJELNIK SPL-1	89		
VM11--	UTIČNICA SCHUKO+KS+POKLOPAC 2P+E 16A 250V~ 2M	68	EM60--	UTIČNICA SA BRJAĆI APARAT 2,5A 230V~/15A 110V~ 3M	90		
VM20--	UTIČNICA EURO+KS 2P 10A 250V~ 1M	69	EM65--	PUNJAČ USB 5V 1A 2M	90		
VM40--	UTIČNICA FRANCUSKA+KS 2P+E 16A 250V~ 2M	69	EM55	LED SVJETILJKA ZA SLUČAJ NUŽDE 250V~ 1,5 W, NiMh 6h 7M	90		
VM41--	UTIČNICA FRANCUSKA+KS+POKLOPAC 2P+E 16A 250V~ 2M	69	EM50--	SVJETILJKA LED JEDNOBOJNA 250V~ 12W 2M	91		
VM30--	UTIČNICA TALIJANSKA P17/11+KS 2P+E 16A 250V~ 1M	69	EM51--	SVJETILJKA LED DVOBODNA 250V~ 2x6W 2M	91		
VM31--	UTIČNICA SCHUKO/ITA P17/11+KS 2P+E 16A 250V~ 2M	69	EM52--	SVJETILJKA LED 3D DVOBODNA 230V~ 2x6W 2M	91		
VM32--	UTIČNICA SCHUKO/ITA P30+KS 2P+E 16A 250V~ 2M	70	EM70--	PREKIDAČ NA OTISK PRSTA ARX1, 3A/12V 2M	92		
VM33--	UTIČNICA TALIJANSKA P11+KS 2P+E 10A 250V~ 1M	70	EM80--	PREKIDAČ BEZDODIRNI 10A 240V~	93		
VM21--	UTIČNICA EURO/AMERIČKA+KS 2P 16A 250V~ 1M	70	EM81--	PREKIDAČ BEZDODIRNI ZA UPRAVLJANJE	93		
VM51--	UTIČNICA BRITANSKA BS546+KS 2P+E 15A 250V~ 2M	70	EM90--	ZUJALICA 8VA 220V~ 1M	94		
VM52--	UTIČNICA BRITANSKA BS 1363+KS 2P+E 13A 250V~ 2M	70	EM91--	ZUJALICA 8VA 12V 1M	94		
VM80	PRENAPONSKA ZAŠTITA MPE MINI 275V/50Hz	70	EM92--	ZVONO 8VA 220V~ 1M	94		
<b>KOMUNIKACIJE KM</b>			EM93--	ZVONO 8VA 12V 1M	94		
KM10--	UTIČNICA TV OSNOVNA 0dB 1M	72	EM95--	REGULATOR GLASNOĆE ZA 100V AUDIO LINIJU 35W 2M	95		
KM20--	UTIČNICA TV OSNOVNA 0dB 2M	72	EM96--	REGULATOR GLASNOĆE NISKOOHMSKI 4-8 Ω 35W 2M	95		
KM11--	UTIČNICA TV ZAVRŠNA 1dB 1M	72					
KM12--	UTIČNICA TV PRIJELAZNA 10dB 1M	72					
KM15--	UTIČNICA SAT OSNOVNA 0dB 1M	73	CM10--	SET UTIČNICA 2x SCHUKO 2P+E 16A 250V~ 4M	96		
KM24--	UTIČNICA SAT OSNOVNA 0dB 2M	73	CM11--	SET UTIČNICA 3x SCHUKO 2P+E 16A 250V~ 7M	96		
KM16--	UTIČNICA SAT ZAVRŠNA 1dB 1M	73	CM15	SET SPOJNICA RAZNOBOJNI 3x1,5mm² 1M	97		
KM19--	UTIČNICA R OSNOVNA 0dB 1M	73	CM16	SET SPOJNICA RAZNOBOJNI 3x2,5mm² 2M	97		
KM29--	UTIČNICA R OSNOVNA 0dB 2M	73	CM17	SET VIJAKA 3,5x20	97		
KM25--	UTIČNICA SAT-TV ZAVRŠNA 1dB 2M	73	CM18	SET VIJAKA 3,5x35	97		
KM22--	UTIČNICA AUDIO 2xRCA 1M	74	CM19	SET VIJAKA 3,5x50	97		
KM23--	UTIČNICA AUDIO ZA ZVUČNIKE 1M	74	CM22--	SET ZA PREKIDAČE IP44 2M	97		
KM26--	UTIČNICA AUDIO ZA ZVUČNIKE 2M	74	CM23--	SET ZA UTIČNICE IP44 2M	97		
KM30--	UTIČNICA TEL LT RJ11 8/4 1M	75	CM25--OL	SET ZA KUPAONICU 3x20AX 250V~ 4M OL	97		
KM31--	UTIČNICA TEL BT SEC 6/6 1M	75	CM25--OS	SET ZA KUPAONICU 3x20AX 250V~ 4M OS	97		
KM36--	UTIČNICA TEL KS RJ11 6/4 1M	75	NM41	NOSAČ SET ZA KUPAONICU 4M	98		
KM37--	UTIČNICA CAT5e KS RJ45 8/8 1M	75	OL41--	OKVIR LINE SET ZA KUPAONICU	98		
KM35--	ADAPTER KS 1M	75	OS41--	OKVIR SOFT SET ZA KUPAONICU	98		
KM38--	ADAPTER KS SA ZAŠTITOM OD PRAHA 1M	75					
KM50--	ADAPTER KS UNIVERZALNI 1M	76					
KM40--	ADAPTER PD 1M	76					
KM43--	ADAPTER PD SA ZAŠTITOM OD PRAHA 1M	76	TM11AW	TIPKA 1M	101		
KM46--	ADAPTER R&M 1M	76	TM11AWIN	TIPKA 1M IN	101		
KM47--	ADAPTER R&M SA ZAŠTITOM OD PRAHA 1M	76	TM12AW	TIPKA 2M	101		
KM45--	ADAPTER LK 1M	76	TM12AWIN	TIPKA 2M IN	101		
KA26	ADAPTER NEXSANS 2M	77	TM21AW	PUNILO 1M	101		
KM48--	ADAPTER AT&T SYSTIMAX SA ZAŠTITOM OD PRAHA 1M	77	TM22AW	PUNILO 2M	101		
KM51--	UTIČNICA USB TIP A 1M	77	VM10AW	UTIČNICA SCHUKO+KS 2P+E 16A 250V~ 2M	102		
<b>ANTIBAKTERIJSKI PROGRAM AW</b>			VM11AW	VTIČNICA SCHUKO+KS+POKLOPAC 2P+E 16A 250V~ 2M	102		
			VM20AW	UTIČNICA EURO+KS 2P 10A 250V~ 1M	102		
			KM11AW	UTIČNICA TV ZAVRŠNA 1dB 1M	102		
			KM35AW	ADAPTER KS 1M	102		
			OS20AW	OKVIR SOFT 2M	103		
			OS24AW	OKVIR SOFT 2x2M	103		
			OS26AW	OKVIR SOFT 3x2M	103		
			OS30AW	OKVIR SOFT 3M	103		
			OS40AW	OKVIR SOFT 4M	103		
			OS70AW	OKVIR SOFT 7M	103		
<b>OKVIRI PURE OP</b>							
			OP20--	OKVIR PURE 2M	106		
			OP24--	OKVIR PURE 2x2M	106		
			OP26--	OKVIR PURE 3x2M	106		
			OP30--	OKVIR PURE 3M	107		
			OP40--	OKVIR PURE 4M	107		
			OP70--	OKVIR PURE 7M	107		
			OP13--	OKVIR PURE 1/3M	107		
			OP23--	OKVIR PURE 2/3M	107		

## INDEX

šifra	opis proizvoda	stranica	šifra	opis proizvoda	stranica			
<b>OKVIRI LINE OL</b>								
OL20--	OKVIR LINE 2M	110	DW10	RAZVODNA KUTIJA OKRUGLA ZA ZID DSM78	142			
OL24--	OKVIR LINE 2x2M	110	HW10	RAZVODNA KUTIJA OKRUGLA ZA ŠUPLJE STIJENE SM78x45	142			
OL26--	OKVIR LINE 3x2M	110	DE23	POKLOPAC KUTIJE DEKORATIVNI SM78	142			
OL28--	OKVIR LINE 4x2M	110	DE24	ZAŠTITNI POKLOPAC KUTIJE 78	142			
OL30--	OKVIR LINE 3M	111	HW20	RAZVODNA KUTIJA KVADRATNA ZA ZID SM105x105	142			
OL40--	OKVIR LINE 4M	111	<b>PRIBOR ZA OŽIĆENJE</b>					
OL70--	OKVIR LINE 7M	111	UW10--	STEZALJKA JEDNOREDNA PA 2x2,5mm <sup>2</sup> 12P	144			
OL10--	OKVIR LINE 1M	111	UW11--	STEZALJKA JEDNOREDNA PA 2x4mm <sup>2</sup> 12P	144			
OL13--	OKVIR LINE 1/3M	111	UW12--	STEZALJKA JEDNOREDNA PA 2x6mm <sup>2</sup> 12P	144			
OL23--	OKVIR LINE 2/3M	111	UW15--	STEZALJKA JEDNOREDNA ZATVORENA PC 2x2,5mm <sup>2</sup> 10P	144			
<b>OKVIRI SOFT OS</b>			UW16--	STEZALJKA JEDNOREDNA ZATVORENA PC 2x4mm <sup>2</sup> 10P	144			
OS20--	OKVIR SOFT 2M	114	UW17--	STEZALJKA JEDNOREDNA ZATVORENA PC 2x6mm <sup>2</sup> 10P	144			
OS24--	OKVIR SOFT 2x2M	114	UW20--	STEZALJKA DVOREDNA PA 1,5mm <sup>2</sup> 12P	144			
OS26--	OKVIR SOFT 3x2M	114	UW21--	STEZALJKA DVOREDNA PA 2,5mm <sup>2</sup> 12P	144			
OS28--	OKVIR SOFT 4x2M	114	UW22--	STEZALJKA DVOREDNA PA 4-6mm <sup>2</sup> 12P	144			
OS30--	OKVIR SOFT 3M	115	UW23--	STEZALJKA DVOREDNA PA 10mm <sup>2</sup> 12P	144			
OS40--	OKVIR SOFT 4M	115	UW40--	STEZALJKA BEZ VIJAKA PA 1,5mm <sup>2</sup> 3P	145			
OS70--	OKVIR SOFT 7M	115	UW41--	STEZALJKA BEZ VIJAKA PA 1,5mm <sup>2</sup> 5P	145			
OS72--	OKVIR SOFT 2x7M	115	UW42--	STEZALJKA BEZ VIJAKA PA 1,5mm <sup>2</sup> 8P	145			
OS10--	OKVIR SOFT 1M	115	UW45--	STEZALJKA BEZ VIJAKA PA 2,5mm <sup>2</sup> 3P	145			
OS13--	OKVIR SOFT 1/3M	115	UW46--	STEZALJKA BEZ VIJAKA PA 2,5mm <sup>2</sup> 4P	145			
OS23--	OKVIR SOFT 2/3M	115	UW47--	STEZALJKA BEZ VIJAKA PA 2,5mm <sup>2</sup> 5P	145			
<b>NOSAČI MM</b>			UW50--	STEZALJKA BEZ VIJAKA PA 2,5mm <sup>2</sup> 2/1P	145			
NM20	NOSAČ S NOŽICAMA 2M	120	<b>distribucija</b>					
NM21	NOSAČ BEZ VIJAKA 2M	120	šifra	opis proizvoda	stranica			
NM24	NOSAČ METALNI S NOŽICAMA 2M	120	<b>KUĆIŠTA CUBO IP20 AC</b>					
NM25	NOSAČ METALNI BEZ VIJAKA 2M	120	AC11--	+	148			
NM30	NOSAČ S VIJCIMA 3M	121	AC21--	KUĆIŠTE NO CUBO S DNOM IP20 2M	148			
NM40	NOSAČ S VIJCIMA 4M	121	AC41--	KUĆIŠTE NO CUBO S DNOM IP20 4M	148			
NM70	NOSAČ S VIJCIMA 7M	121	AC61--	KUĆIŠTE NO CUBO S DNOM IP20 6M	148			
NM72	NOSAČ S VIJCIMA 2x7M	121	<b>KUĆIŠTA CUBO IP55 AQ</b>					
NM10	NOSAČ S NOŽICAMA 1M	122	AQ20--	KUĆIŠTE NO CUBO IP55 2M	149			
NM11	NOSAČ BEZ VIJAKA 1M	122	AQ22--	KUĆIŠTE NO CUBO IP55 2x2M	149			
NM23	NOSAČ S NOŽICAMA 2/3M	122	AQ30--	KUĆIŠTE NO CUBO IP55 3M	149			
NM32	NOSAČ S VIJCIMA 2/3M	122	AQ31--	KUĆIŠTE PO CUBO IP55 3M	149			
<b>KUTIJE</b>			<b>PARAPETNI KANALI ALUMINIJSKI MA</b>					
šifra	opis proizvoda	stranica	RT10	ADAPTER MA 92	150			
<b>OKRUGLE KUTIJE</b>			RT12--	OKVIR MA 92 2/3M	150			
DE10	KUTIJA OKRUGLA PLITKA ZA ZID SM60-01	126	RT14--	OKVIR MA 92 4M	150			
DE11	KUTIJA OKRUGLA DUBOKA ZA ZID SM60-06	126	RT17--	OKVIR MA 92 7M	150			
DE30	ELEMENT ZA SPAJANJE ZA ZID SM60-03	126	RT20--	OSNOVA KANALA MA 130x65	151			
DE31	ELEMENT ZA SPAJANJE ZA ZID SM60-04	126	RT21--	OSNOVA KANALA MA 165x65	151			
DE12	KUTIJA OKRUGLA ZA ZID 65-46	127	RT25--	POKROV KANALA MA 92	151			
DE13	KUTIJA OKRUGLA ZA ZID 65-60	127	RT30	PREGRADA MA 43	151			
DE14	PRODUŽETAK KUTIJE ZA ZID 65-46	127	RT31	PREGRADA AL. MA 43	151			
DE32	ELEMENT ZA SPAJANJE ZA ZID 65-71	127	RT32	PREGRADA AL. MA DUPLA 43	151			
DE33	ELEMENT ZA SPAJANJE ZA ZID 65-91	127	RT35--	ZAVRŠNI ELEMENT MA 130x65	152			
DE20	ZAŠTITNI POKLOPAC KUTIJE 60	127	RT36--	ZAVRŠNI ELEMENT MA 165x65	152			
DE21	ZAŠTITNI POKLOPAC KUTIJE 65	127	RT38	RAVNİ VEZNI ELEMENT MA 65	152			
DE22	POKLOPAC KUTIJE DEKORATIVNI SM60	127	RT40--	UNIVERZALNI KUT MA 130x65	152			
HE10	KUTIJA OKRUGLA ZA ŠUPLJE STIJENE SM68x40	130	RT41--	UNIVERZALNI KUT MA 165x65	152			
HE11	KUTIJA OKRUGLA ZA ŠUPLJE STIJENE SM68x55	130	RT42	STEZALJKA ZA UZEMLJENJE MA 2x A6,3	152			
BE10	KUTIJA OKRUGLA ZA BETON 60-49	130	RT43--	L KUTNI ELEMENT MA 130x65	153			
BE11	KUTIJA OKRUGLA ZA BETON 60-77	130	RT44--	L KUTNI ELEMENT MA 165x65	153			
BE20	NOSITELJ KUTIJE ZA BETON	130	RT45--	T DIO MA 130x65	153			
BE21	UVODNICA KUTIJE ZA BETON 16	130	RT46--	T DIO MA 165x65	153			
<b>PRAVOKUTNE KUTIJE</b>			RT50--	NOSAČ STUPIĆA MA JEDNOSTRUKI 130x65	154			
DM30	KUTIJA PRAVOKUTNA ZA ZID PM3	134	RT51--	NOSAČ STUPIĆA MA DVOSTRUKE 2X 130x65	154			
DM31	KUTIJA PRAVOKUTNA ZA ZID PM3-65	134	RT52--	STUPIĆ MA 130x65x500	154			
DM40	KUTIJA PRAVOKUTNA ZA ZID PM4	134	RT53--	STUPIĆ MA DVOSTRUKE 2X 130x65x500	154			
DM41	KUTIJA PRAVOKUTNA ZA ZID PM4-65	134	<b>TALNE DOZE MTPODNE KUTIJE MT</b>					
DM70	KUTIJA PRAVOKUTNA ZA ZID PM7	135	RB30	PODNA KUTIJA MT 7 H=53mm	156			
DM71	KUTIJA PRAVOKUTNA ZA ZID PM7-65	135	RB40	PODNA KUTIJA MT 7 H=88mm	156			
DM72	KUTIJA PRAVOKUTNA ZA ZID PM72-65	135	RB31	PODNOŽJE ZA PODNU KUTIJU MT 7 H=53mm	156			
DM80	ELEMENT ZA SPAJANJE KUTIJE PM	135	RB41	PODNOŽJE ZA PODNU KUTIJU MT 7 H=88mm	156			
DM33	POKLOPAC KUTIJE ZAŠTITNI PM3	136	RB33	PODNA KUTIJA MT 14 H=53mm	156			
DM34	POKLOPAC KUTIJE DEKORATIVNI PM3	136	RB43	PODNA KUTIJA MT 14 H=88mm	156			
DM43	POKLOPAC KUTIJE ZAŠTITNI PM4	136	RB34	PODNOŽJE ZA PODNU KUTIJU MT 14 H=53mm	157			
DM44	POKLOPAC KUTIJE DEKORATIVNI PM4	136	RB44	PODNOŽJE ZA PODNU KUTIJU MT 14 H=88	157			
DM73	POKLOPAC KUTIJE ZAŠTITNI PM7	136	RB36	PODNA KUTIJA MT 21 H=53mm	157			
DM74	POKLOPAC KUTIJE DEKORATIVNI PM7	136	RB46	PODNA KUTIJA MT 21 H=88mm	157			
DM75	POKLOPAC KUTIJE DEKORATIVNI PM72	137	RB37	PODNOŽJE ZA PODNU KUTIJU T 21 H=53mm	157			
HM30	KUTIJA PRAVOKUTNA ZA ŠUPLJE STIJENE VM3	138	RB47	PODNOŽJE ZA PODNU KUTIJU MT 21 H=88mm	157			
HM40	KUTIJA PRAVOKUTNA ZA ŠUPLJE STIJENE VM4	138	<b>RAZVODNI ORMARI MO</b>					
HM70	KUTIJA PRAVOKUTNA ZA ŠUPLJE STIJENE VM7	138	RB10	ADAPTER ZA DIN-LETVU 35mm 1M	158			
HM72	KUTIJA PRAVOKUTNA ZA ŠUPLJE STIJENE VM72	138	RB11	ADAPTER ZA DIN-LETVU 35mm 2M	158			
BM30	KUTIJA PRAVOKUTNA ZA BETON BM3	139	RB20	RAZVODNI ORMAR MO 12+2	159			
BM40	KUTIJA PRAVOKUTNA ZA BETON BM4	139	RB21	RAZVODNI ORMAR MO 24+4	159			
BM70	KUTIJA PRAVOKUTNA ZA BETON BM7	139	RB22	RAZVODNI ORMAR MO 36+6	159			
BM80	VEZNI PROFIL ZA KUTIJE BM	139	RB23	RAZVODNI ORMAR MO 48+8	159			
BM82	VEZNI PROFIL ZA KUTIJE	139						

## ekonomik

šifra	opis proizvoda	stranica
<b>PREKIDAČI SE</b>		
SE10	PREKIDAČ JEDNOPOLNI 10AX 250V~	172
SE11	TIPKALO JEDNOPOLNO 10A 250V~	172
SE22	PREKIDAČ DVOPOLNI 16AX 250V~	172
SE50	PREKIDAČ SERIJSKI 10AX 250V~	172
SE51	TIPKALO SERIJSKO 10A 250V~	173
SE52	PREKIDAČ ZA ŽALUZINE 10AX 250V~	173
SE53	TIPKALO ZA ŽALUZINE 10A 250V~	173
SE60	PREKIDAČ IZMJENIČNI 10AX 250V~	173
SE63	PREKIDAČ DUPLI IZMJENIČNI 10AX 250V~	173
SE70	PREKIDAČ KRIŽNI 10AX 250V~	173
SE10--	PREKIDAČ JEDNOPOLNI 10AX 250V~	174
SE10--IN	PREKIDAČ JEDNOPOLNI 10AX 250V~ IN	174
SE11--	TIPKALO JEDNOPOLNO 10A 250V~	174
SE11--TI50	TIPKALO JEDNOPOLNO 10A 250V~ TI 50	174
SE11--TI51	TIPKALO JEDNOSTRUO 10A 250V~ TI 51	174
SE11--IL	TIPKALO JEDNOPOLNO 10A 250V~ IL	174
SE22--NT03	PREKIDAČ DVOPOLNI 10AX 250V~ NT 03	174
SE50--	PREKIDAČ SERIJSKI 10AX 250V~	175
SE51--	TIPKALO SERIJSKO 10A 250V~	175
SE52--NT09	PREKIDAČ ZA ŽALUZINE 10AX 250V~ NT 09	175
SE53--NT09	TIPKALO ZA ŽALUZINE 10A 250V~ NT 09	175
SE60--	PREKIDAČ IZMJENIČNI 10AX 250V~	175
SE63--	PREKIDAČ DUPLI IZMJENIČNI 10AX 250V~	175
SE70--	PREKIDAČ KRIŽNI 10AX 250V~	175
<b>TIPKE TE</b>		
TE10--	TIPKA OBIČNA	176
TE10--IN	TIPKA OBIČNA IN	176
TE13--IL	TIPKA S NATPISNOM PLOČICOM IL	176
TE11--	TIPKA SERIJSKA	176
<b>INDIKACIJA IA</b>		
IA10--	TINJALICA 220V~ 0,25W	177
IA20--	SIJALICA LED 220V~ 4W	177
IA21--	SIJALICA LED 24V AC/DC 0,5W	177
IA22--	SIJALICA LED 12V AC/DC 0,25W	177
<b>UTIČNICE VE</b>		
VE10--X0	UTIČNICA SCHUKO + KS 2P+E 16A 250V~ X0	180
VE11--X0	UTIČNICA SCHUKO + POKLOPAC 2P+E 16A 250V~ X0	180
VE12--X0	UTIČNICA SCHUKO 2P+E 16A 250V~ BV X0	180
VE13--X0	UTIČNICA SCHUKO + POKLOPAC 2P+E 16A 250V~ BV X0	180
VE10--	UTIČNICA SCHUKO 2P+E 16A 250V~	180
VE11--	UTIČNICA SCHUKO + POKLOPAC 2P+E 16A 250V~	180
VE12--	UTIČNICA SCHUKO 2P+E 16A 250V~ BV	180
VE13--	UTIČNICA SCHUKO + POKLOPAC 2P+E 16A 250V~ BV	180
VE40--X0	UTIČNICA FRANCUSKA 2P+E 16A 250V~ X0	181
VE41--X0	UTIČNICA FRANCUSKA + POKLOPAC 2P+E 16A 250V~ X0	181
VE42--X0	UTIČNICA FRANCUSKA 2P+E 16A 250V~ BV X0	181
VE43--X0	UTIČNICA FRANCUSKA + POKLOPAC 2P+E 16A 250V~ BV X0	181
VE40--	UTIČNICA FRANCUSKA 2P+E 16A 250V~	181
VE41--	UTIČNICA FRANCUSKA + POKLOPAC 2P+E 16A 250V~	181
VE42--	UTIČNICA FRANCUSKA 2P+E 16A 250V~ BV	181
VE43--	UTIČNICA FRANCUSKA + POKLOPAC 2P+E 16A 250V~ BV	181
VE16--	UTIČNICA SCHUKO DVOSTRUKA 2P+E 16A 250V~	182
VE46--	UTIČNICA FRANCUSKA DVOSTRUKA 2P+E 16A 250V~	182
VE30--	UTIČNICA 2P 16A 250V~	182
<b>KOMUNIKACIJE KE</b>		
KE11	UTIČNICA TV-R ZAVRŠNA 2dB	183
KE12	UTIČNICA TV-R PRIJELAZNA 8,5dB	183
KE16	UTIČNICA SAT-TV-R ZAVRŠNA 3dB	183
KE36	UTIČNICA TEL KS RJ11 6/4	183
KE37	UTIČNICA CAT5e KS RJ45 8/8	184
KE38	UTIČNICA TEL KS DVOSTRUKA 2x RJ11 6/4	184
KE39	UTIČNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8	184
KE45	ADAPTER KS	184
KE46	ADAPTER KS DVOSTRUKI	184
KE47	ADAPTER PD DVOSTRUKI	184
KE10--	UTIČNICA TV OSNOVNA 0dB	185
KE11--	UTIČNICA TV-R ZAVRŠNA 2dB	185
KE12--	UTIČNICA TV-R PRIJELAZNA 8,5dB	185
KE16--	UTIČNICA SAT-TV-R ZAVRŠNA 3dB	185
KE22--	UTIČNICA AUDIO 2xRCA	185
KE23--	UTIČNICA AUDIO ZA ZVUČNIKE	185
KE36--	UTIČNICA TEL KS RJ11 6/4	186
KE37--	UTIČNICA CAT5e KS RJ45 8/8	186
KE38--	UTIČNICA TEL KS DVOSTRUKA 2x RJ11 6/4	186
KE39--	UTIČNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8	186
KE35--	UTIČNICA TEL LT RJ11 6/4	186
<b>POKLOPCI PA</b>		
PE10--	POKLOPAC TV-R 2P/3P	187
PE20--	POKLOPAC KS JEDNOSTRUKI	187
PE21--	POKLOPAC KS/PD DVOSTRUKI	187
PE30--	POKLOPAC TAE/TDO	187


šifra	opis proizvoda	stranica
<b>ELEKTRONIKA EE</b>		
EE15	DIMER ROTACIJSKI MEN RL 400W	188
EE16	DIMER ROTACIJSKI MEN RLC 400W	188
EE17	DIMER ROTACIJSKI FAN 600VA	189
EE19	DIMER ROTACIJSKI MEN LED 100W	189
EE15--	DIMER ROTACIJSKI MEN RL 400W	189
EE16--	DIMER ROTACIJSKI MEN RLC 400W	189
EE19--	DIMER ROTACIJSKI MEN LED 100W	190
EE32--	IR PREKIDAČ 5A 250V~	190
<b>POKLOPCI ELEKTRONIKE PE</b>		
PE40--	POKLOPAC DIMER PREKIDAČ 04	192
PE41--	POKLOPAC DIMER PREKIDAČ 06	192
<b>PRIBOR AE</b>		

AE10--	PUNILO	193
AE20--	PRIKLIČAK PETEROPOLNI STALNI 3P+N+E 5x4mm <sup>2</sup>	193
AE30--	KUĆIŠTE NO 1	193
AE50--	ZAŠTITA ZIDNA	194
AE51--	ZAŠTITA ZA UTIČNICE DJEĆJA	194
<b>OKVIRI OE</b>		

OE10--	OKVIR EKONOMIK 1	195
OE20--	OKVIR EKONOMIK 2 HORIZONTALNI	195
OE21--	OKVIR EKONOMIK 2 VERTIKALNI	195
OE30--	OKVIR EKONOMIK 3 HORIZONTALNI	195
OE31--	OKVIR EKONOMIK 3 VERTIKALNI	196
OE40--	OKVIR EKONOMIK 4 HORIZONTALNI	196
OE41--	OKVIR EKONOMIK 4 VERTIKALNI	196
OE90--	OKVIR EKONOMIK DEKORATIVNI	196
<b>fontana</b>		

šifra	opis proizvoda	stranica
<b>PREKIDAČI SF</b>		
SF10--	PREKIDAČ JEDNOPOLNI IP44 10A 250V~	200
SF10--TI	PREKIDAČ JEDNOPOLNI IP44 10A 250V~ TI	200
SF11--TI	TIPKALO JEDNOPOLNO IP44 10A 250V~ TI	200
SF20--	PREKIDAČ DVOPOLNI IP44 10A 250V~	200
SF50--	PREKIDAČ SERIJSKI IP44 10A 250V~	201
SF51--	TIPKALO SERIJSKO IP44 10A 250V~	201
SF60--	PREKIDAČ IZMJENIČNI IP44 10A 250V~	201
SF60--TI	PREKIDAČ IZMJENIČNI IP44 10A 250V~ TI	201
SF63--	PREKIDAČ DVOSTRUKI IZMJENIČNI IP44 10A 250V~	201
SF70--	PREKIDAČ KRIŽNI IP44 10A 250V~	201
<b>UTIČNICE VF</b>		
VF10--	UTIČNICA SCHUKO + POKLOPAC IP44 2P+E 16A 250V~	202
VF12--	UTIČNICA SCHUKO + POKLOPAC IP44 2P+E 16A 250V~ BV	202
<b>SETOVI CF</b>		
CF10--	SET UTIČNICA SCHUKO DVOSTRUKA HORIZ IP44 2x2P+E 16A 250V~	203
CF11--	SET UTIČNICA SCHUKO DVOSTRUKA VERT IP44 2x2P+E 16A 250V~	203
CF12--	SET UTIČNICA SCHUKO + PREKIDAČ MEN HOR IP44 16A + 10AX 250V~	203
CF13--	SET UTIČNICA SCHUKO + PREKIDAČ MEN VERT IP44 16A + 10AX 250V~	204
CF14--	SET UTIČNICA SCHUKO DVOSTRUKI HOR IP44 2x2P+E 16A 250V~ BV	204
CF15--	SET UTIČNICA SCHUKO DUPLI VERT IP44 2x2P+E 16A 250V~ BV	204
CF16--	SET UTIČNICA SCHUKO + PREKIDAČ MEN HOR IP44 16A + 10AX 250V~ BV	204
CF17--	SET UTIČNICA PREKIDAČ MEN VERT IP44 16A + 10AX 250V~ BV	204
<b>PRIBOR AF</b>		
AF10--	RAZVODNIK IP44 RN01	205
AF20--	RAZVODNIK IP55 ND01	205




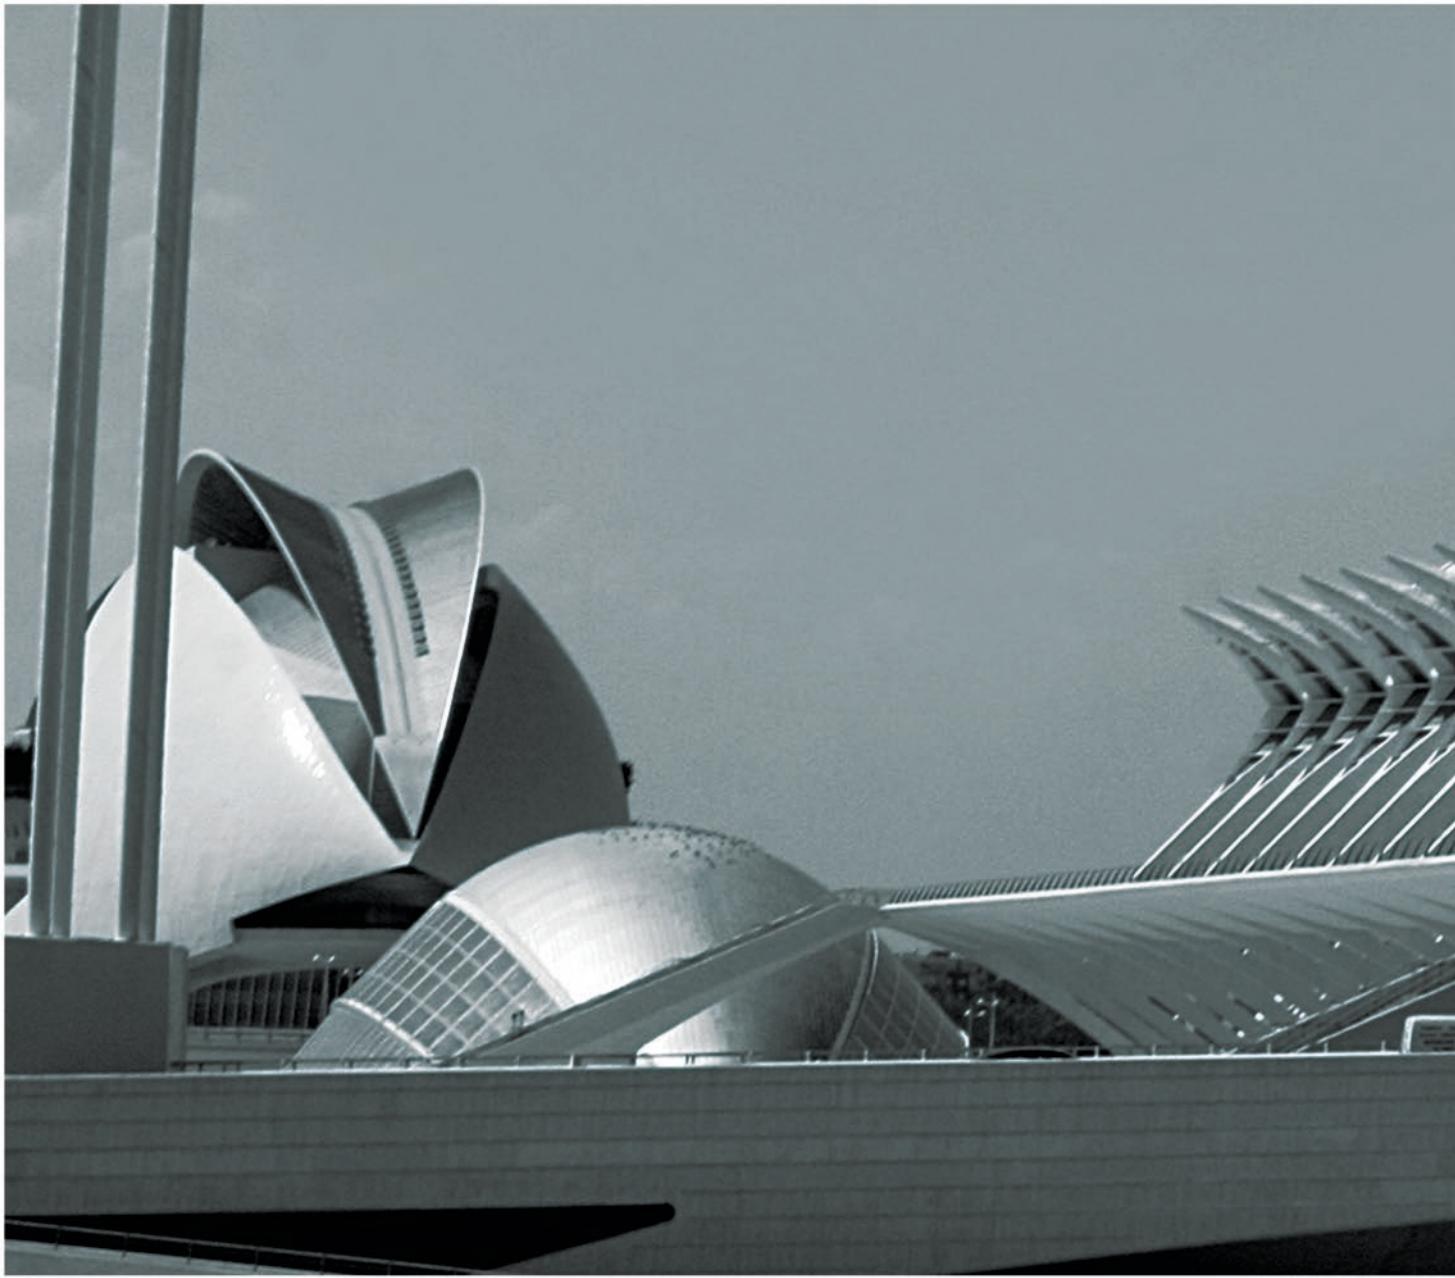



**TEM**

TEM ČATEŽ d.d.  
Čatež 13, 8212 VELIKA LOKA  
SLOVENIJA  
[tem@tem.si](mailto:tem@tem.si)  
[www.tem.si](http://www.tem.si)  
T +386(0)7 348 99 00  
F +386(0)7 348 99 99

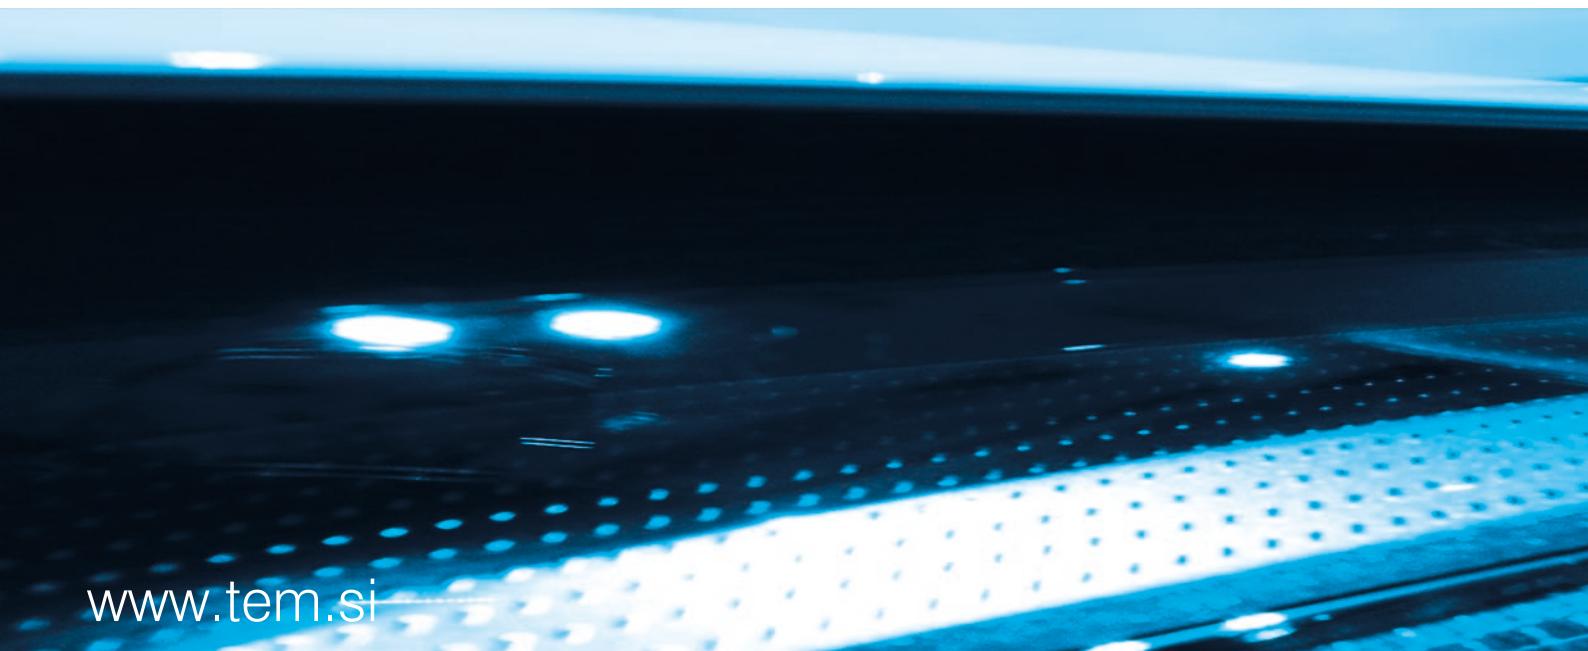

[www.tem.si](http://www.tem.si)

JVE  
2016/2017